



WIRE MOUNT

- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm





CHASSIS: ØG
THICKNESS: T

PARTNO	A	C	G	H	J	K	L	T	PACKAGE
SLC-21	16.0	5.5	4.8	12.7	6.0	8.6	35.8	0.8-2.0	500
SLC-22	16.0	5.5	4.8	12.7	6.0	12.2	39.4	0.8-2.0	
SLC-24	16.0	5.5	4.8	6.4	6.0	8.6	29.5	0.8-2.0	
SLC-25	16.0	5.5	4.8	19.1	6.0	8.6	42.2	0.8-2.0	
SLC-26	16.0	5.5	4.8	19.1	6.0	6.1	39.4	0.8-2.0	
SLC-26L	16.0	5.5	4.8	19.1	6.0	6.7	39.4	0.8-2.0	




HARNESS CLIP STANDOFF

- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm



CHASSIS: ØG
THICKNESS: T

PARTNO	A	B	C	F	G	H	J	L	T	PACKAGE
THE-11	12.0	5.6	4.0	5.22	3.5	10.0	3.8	22.9	0.6-1.6	500

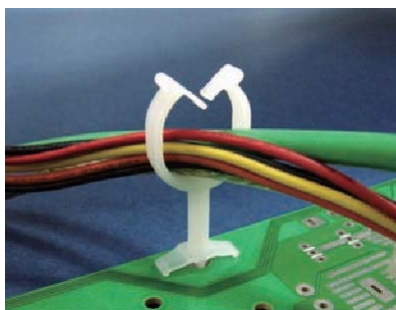

CHASSIS: ØG
THICKNESS: T

PARTNO	A	B	C	F	G	H	J	L	T	PACKAGE
THE-38	10.0	14.8	5.5	21.6	4.8-5.0	11.8	3.0	41.7	0.5-2.0	500

