


# WIRE HOLDER






- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm



PART NO	A	B	C	K	PACKAGE
KLR-1	39.9	25.2	13.0	19.0	500

# WIRE LOCK

- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm



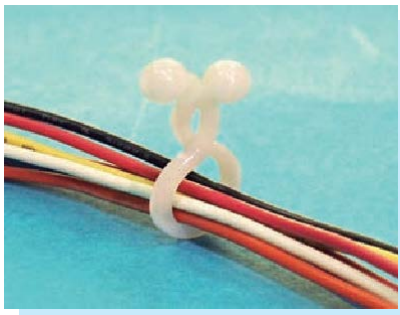


FOR TL-12, TL-34

PART NO	A	K	PACKAGE	UL
TL-1	17.8	4.0	1000	UL
TL-2	23.8	7.3		UL
TL-3A	27.5	10.0		UL
TL-4	30.4	13.8		UL
TL-5	35.0	17.2		UL
TL-6	41.4	24.2	500	UL
TL-7	42.0	19.5		UL
TL-8	16.5	5.0		
TL-9	30.0	9.7		
TL-10	38.5	16.3		
TL-11	22.0	4.2		
TL-12	26.0	8.0		
TL-13	32.5	11.5		
TL-14	35.1	14.5		
TL-27	46.0	27.0		
TL-28	55.5	26.8		
TL-29	40.0	17.0		
TL-31	40.0	20.0		
TL-32	35.0	13.5		
TL-34	17.8	4.0		

# WIRE SADDLE SIDE ENTRY

- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm

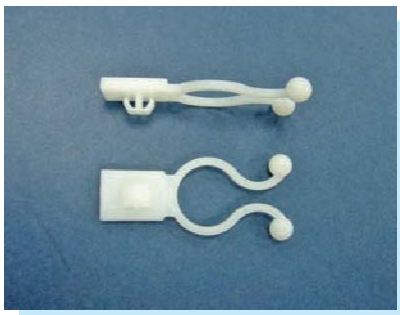

MOUNTING HOLE THICKNESS: T

PART NO	K	T	PACKAGE
THJA-1	13.5	0.8-1.6	500