


# SQUARE SNAP BUSHING

- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm

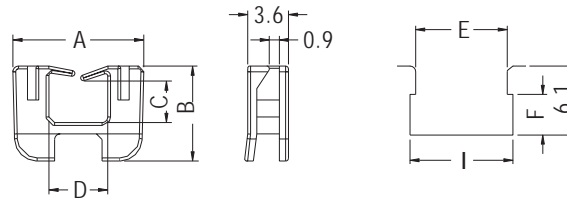


MOUNTING HOLE THICKNESS: T

| PART NO | A    | B   | C   | D    | E    | F   | I    | T       | PACKAGE |
|---------|------|-----|-----|------|------|-----|------|---------|---------|
| SQF-5   | 11.6 | 8.4 | 3.7 | 5.2  | 8.1  | 3.6 | 9.1  | 0.8~1.8 | 500     |
| SQF-6   | 16.9 | 9.1 | 4.1 | 10.2 | 12.8 | 3.4 | 13.8 | 0.9~2.0 |         |

# SQUARE SNAP BUSHING

- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm

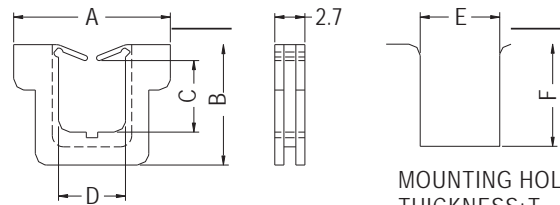


MOUNTING HOLE THICKNESS: T

| PART NO | A    | B    | C   | D   | E   | F   | T       | PACKAGE |
|---------|------|------|-----|-----|-----|-----|---------|---------|
| SQK-1   | 13.8 | 10.6 | 6.3 | 5.9 | 7.0 | 9.0 | 0.6~1.0 | 1000    |

# SQUARE SNAP BUSHING

- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: NATURAL/BLACK
- ◆ UNIT: mm



MOUNTING HOLE THICKNESS: T

| PART NO | A    | B    | C   | D   | E   | F   | G   | T   | PACKAGE |
|---------|------|------|-----|-----|-----|-----|-----|-----|---------|
| SQD-1   | 13.5 | 10.6 | 8.8 | 5.7 | 7.0 | 9.0 | 1.2 | 1.0 | 1000    |

