


- ◆ MATERIAL: SUS316
- ◆ UNIT: mm

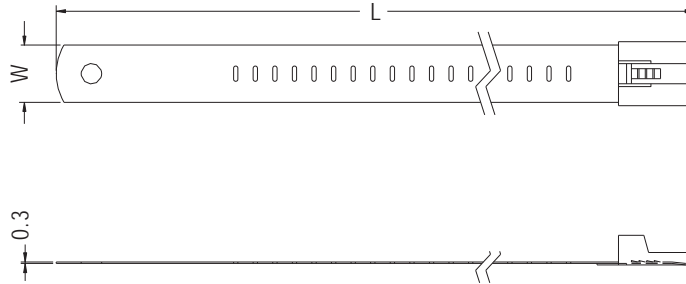

SELF-LOCKING TIES:

PART NO	MAX BUNDLE mm(in.)	APPROX LENGTH mm(in.)	APPROX WIDTH mm(in.)	MIN. LOOP TENSILE STRENGTH kgs.(lbs.)	PACKAGE
STL-150S	22(0.86")	150(5.90")	7.0(0.28")	113.4(250)	100
STL-195S	45(1.70")	195(8.00")	7.0(0.28")	113.4(250)	100
STL-255S	64(2.50")	255(10.0")	7.0(0.28")	113.4(250)	100
STL-335S	89(3.50")	335(13.0")	7.0(0.28")	113.4(250)	100
STL-490S	139(5.40")	490(19.0")	7.0(0.28")	113.4(250)	100
STL-635S	185(7.20")	635(25.0")	7.0(0.28")	113.4(250)	100

PART NO	MAX BUNDLE mm(in.)	APPROX LENGTH mm(in.)	APPROX WIDTH mm(in.)	MIN. LOOP TENSILE STRENGTH kgs.(lbs.)	PACKAGE
STL-150M	22(0.86")	150(5.90")	12.0(0.472")	113.4(250)	100
STL-195M	45(1.70")	195(8.00")	12.0(0.472")	113.4(250)	100
STL-255M	64(2.50")	255(10.0")	12.0(0.472")	113.4(250)	100
STL-335M	89(3.50")	335(13.0")	12.0(0.472")	113.4(250)	100
STL-490M	139(5.40")	490(19.0")	12.0(0.472")	113.4(250)	100
STL-635M	185(7.20")	635(25.0")	12.0(0.472")	113.4(250)	100

