


INSULATED CAP



- ◆ MATERIAL: NYLON 66/PC (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: BLACK
- ◆ UNIT: mm




PARTNO	A	B	C	PACKAGE
SCD-1	24.0	15.0	2.0	1000
SCD-2	31.5	18.0	2.4	
SCD-3	32.0	22.0	2.2	500
SCD-4	37.0	22.0	2.5	
SCD-8	26.0	18.6	2.3	2000
SCD-13	55.0	40.0	3.5	500
SCD-14	32.0	22.4	3.7	1000

INSULATED CAP



- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: BLACK
- ◆ UNIT: mm





PARTNO	A	B	C	PACKAGE
SCD-6	24.0	15.8	3.25	2000

INSULATED CAP



- ◆ MATERIAL: NYLON 66 (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: BLACK
- ◆ UNIT: mm




PARTNO	A	B	C	D	PACKAGE
SCD-5	33.3	26.2	2.5	19.0	1000

PARTNO	A	B	C	D	PACKAGE
SCD-7	51.7	39.23	3.0	28.0	2000

INSULATED CAP



- ◆ MATERIAL: PC (UL)
- ◆ FLAME CLASS: 94V-2/94V-0
- ◆ COLOR: BLACK
- ◆ UNIT: mm

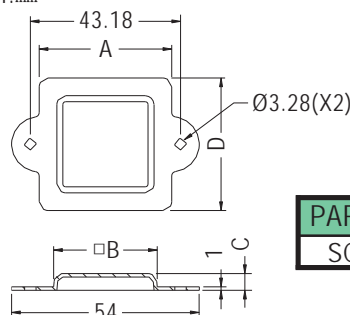

PARTNO	A	B	C	D	PACKAGE
SCD-9	38.1	29.5	4.81	38.1	2000

