


1.0mm Terminal / Housing / Wafer SMT Right Angle Type

Specifications
 Current Rating: 1A AC,DC
 Voltage Rating: 50V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 100MΩ Min
 Withstanding Voltage: 500V AC/minute
 Terminal: Phosphor Bronze / Gold or Tin Plated
 Solder Tabs: Brass / Gold or Tin Plated
 Material: Housing: P.B.T, UL94V-0
 Wafer: Nylon 6T, UL94V-0

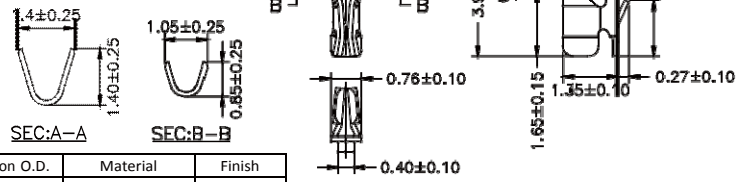


Part No.	Wire Range	Insulation O.D.	Material	Finish
1001-TTP-L	#28-#32	0.80mm(Max)	Phosphor Bronze	Tin Plated
1001-TGP-L	#28-#32	0.80mm(Max)	Phosphor Bronze	Gold Plated

Part No.:1001-T-L


Housing Wafer Terminal

No. of Contacts	Dimensions	
	A	B
2x6	5.00	9.00
2x8	7.00	11.00
2x10	9.00	13.00
2x15	14.00	18.00
2x20	19.00	23.00
2x25	24.00	28.00

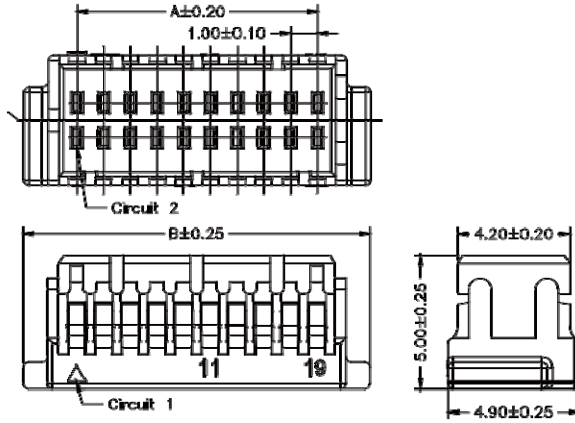


Part No.:1001H-2XXW-L

No. of Contacts	Dimensions		
	A	B	C
2	1.00	3.00	5.00
3	2.00	4.00	6.00
4	3.00	5.00	7.00
5	4.00	6.00	8.00
6	5.00	7.00	9.00
7	6.00	8.00	10.00
8	7.00	9.00	11.00
9	8.00	10.00	12.00
10	9.00	11.00	13.00
11	10.00	12.00	14.00
12	11.00	13.00	15.00
13	12.00	14.00	16.00
14	13.00	15.00	17.00
15	14.00	16.00	18.00
16	15.00	17.00	19.00
17	16.00	18.00	20.00
18	17.00	19.00	21.00
19	18.00	20.00	22.00
20	19.00	21.00	23.00

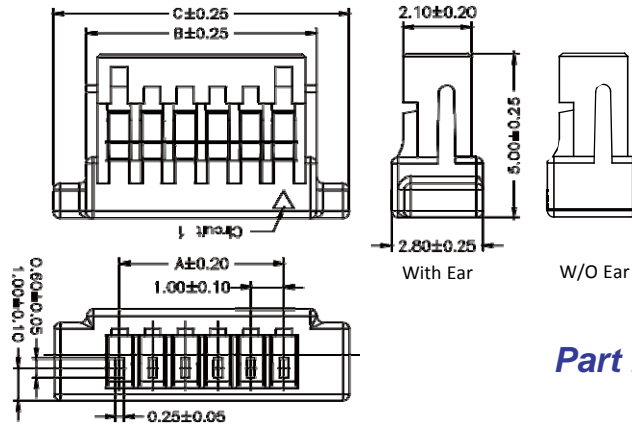

Part No.:1001H-1XXW-L
 1: WITH Ear
 2: W/O Ear

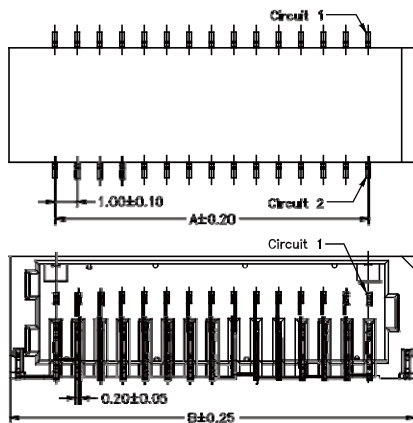

No. of Contacts	Dimensions	
	A	B
2x6	5.00	9.10
2x8	7.00	11.10
2x10	9.00	13.10
2x15	14.00	18.10
2x20	19.00	23.10
2x25	24.00	28.10



Part No.:1001MR-2XXGW-U