



## 1.25mm Terminal / Housing / Wafer SMT Right Angle Type

### Specifications


Current Rating: 1A AC,DC  
Voltage Rating: 200V AC,DC  
Temperature Range: -25°C to +85°C  
Contact Resistance: 40mΩ Max  
Insulation Resistance: 100MΩ Min  
Withstanding Voltage: 500V AC/minute  
Terminal: Brass & Ph.Br / Gold & Tin Plated  
Solder Tabs: Phosphor Bronze / Gold Plated  
Shell: Brass / Tin Plated  
Material: Housing: Nylon 66, UL94V-0  
Wafer: 1255MR: Nylon 6T, UL94V-0  
1255MRA: LCP, UL94V-0

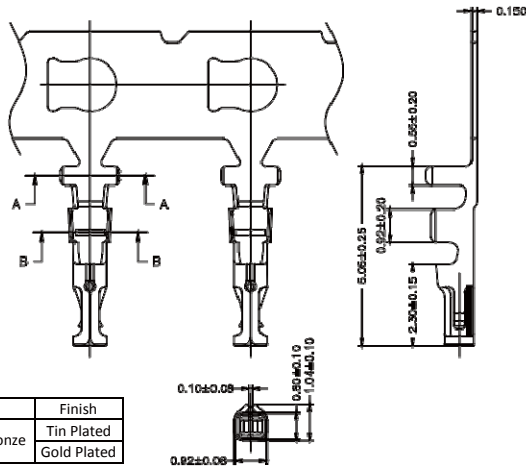

Part No.	Wire Range	Insulation O.D.	Material	Finish
1255-TTP-L	#28-#32	0.90mm(Max)	Phosphor Bronze	Tin Plated
1255-TGP-L				Gold Plated


**Part No.:1255-T-L**

No. of Contacts	Dimensions		
	A	B	C
2	1.25	3.80	6.00
3	2.50	5.05	7.25
4	3.75	6.30	8.50
5	5.00	7.55	9.75
6	6.25	8.80	11.00
7	7.50	10.05	12.25
8	8.75	11.30	13.50
9	10.00	12.55	14.75
10	11.25	13.80	16.00
11	12.50	15.05	17.25
12	13.75	16.30	18.50
13	15.00	17.55	19.75
14	16.25	18.80	21.00
15	17.50	20.05	22.25
20	23.75	26.30	28.50
25	30.00	32.55	34.75
30	36.25	38.80	41.00

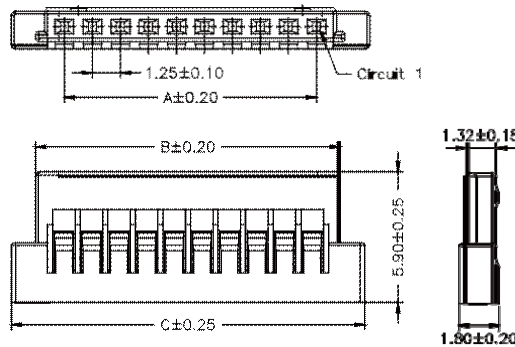


**Part No.:1255H-XXB-L**

No. of Contacts	Dimensions		
	A	B	C
2	1.25	6.10	4.01
3	2.50	7.35	5.26
4	3.75	8.60	6.51
5	5.00	9.85	7.76
6	6.25	11.10	9.01
7	7.50	12.35	10.26
8	8.75	13.60	11.51
9	10.00	14.85	12.76
10	11.25	16.10	14.01
11	12.50	17.35	15.26
12	13.75	18.60	16.51
13	15.00	19.85	17.76
14	16.25	21.10	19.01
15	17.50	22.35	20.26
20	23.75	28.60	26.51
25	30.00	34.85	32.76
30	36.25	41.10	39.01

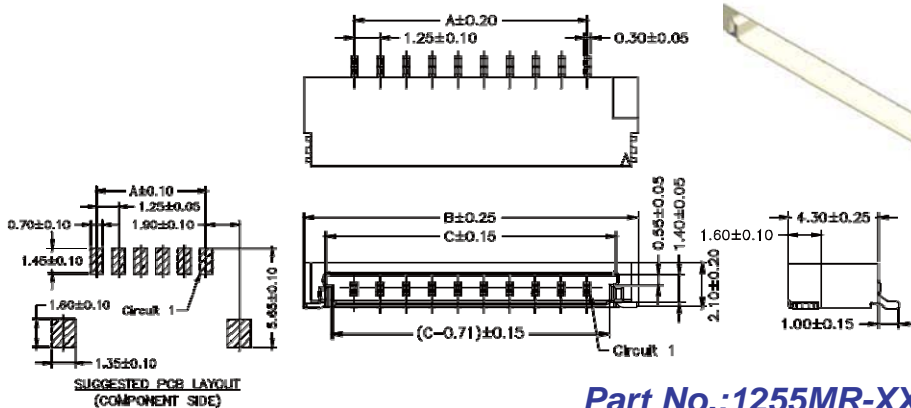

**Part No.:1255MR-XXGW-U**

No. of Contacts	Dimensions		
	A	B	C
20	23.75	31.40	26.60
30	36.25	43.90	39.10

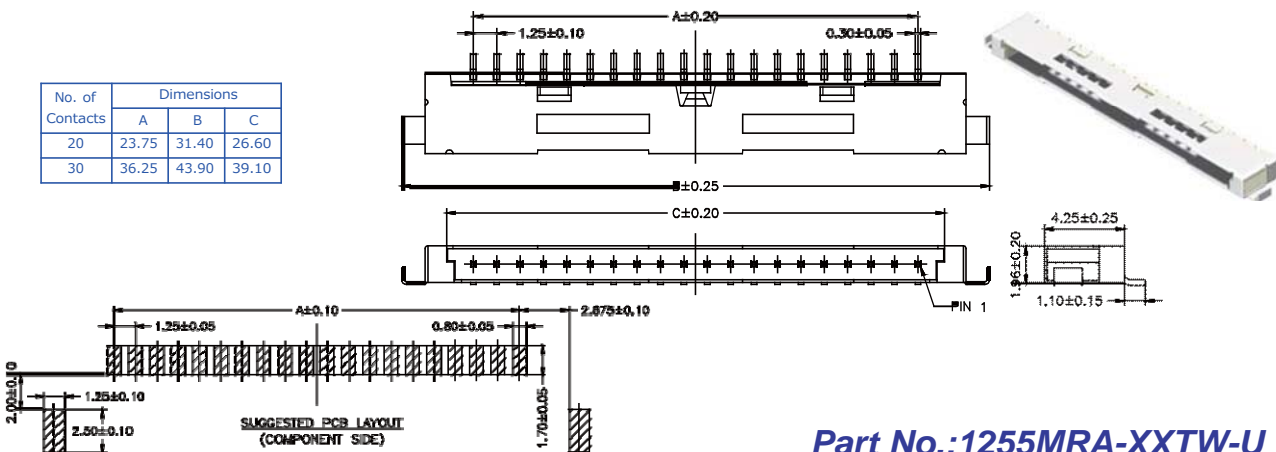

**Part No.:1255MRA-XXTW-U**