

► FEMALE HEADER 1.0mm

Female Header 1.0mm 1 Row H=3.70mm SMT R/A Type




Specifications




Current Rate: 1 AMP | Insulation Resistance: 1000MΩ | Min. Contact Resistance: 20mΩ |
Max.Dielectric Voltage: 500V AC for one minute | Operation Temperature: -40°C to +105°C

Material

Insulator:Polyester, UL 94V-0 | Standard: Nylon 6T or LCP | Terminal: Copper Alloy | Plating: Gold Plated



► ORDER INFORMATION

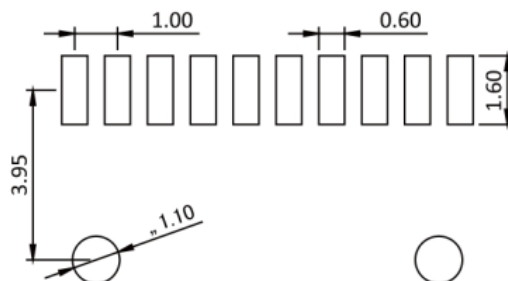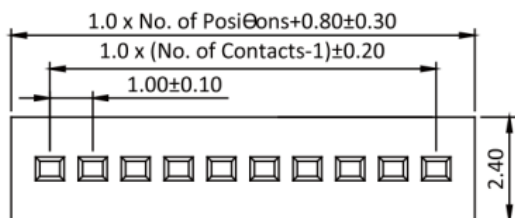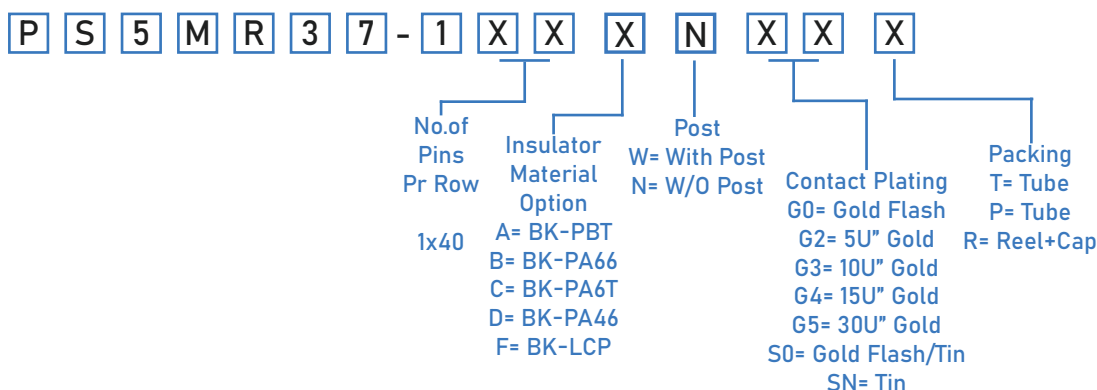

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

