

SOCKET CONNECTORS

Stamped Pin IC Socket 2.54mm



RoHS
2002/95/EC

Specifications

Current Rate: 5 AMP | Insulation Resistance: 5000MΩ Min | Contact Resistance: 20mΩMax |
Dielectric Voltage: 500V AC for one minute | Operation Temperature: -55°C to +105°C

Material


Insulator: Polyester, UL 94V-0 | © Standard: P.B.T | Terminal: Copper Alloy | Plated: Tin Plated

TOPTEK®



HARDWARE ELECTRONIC COMPONENTS



www.toptek-co.com



ORDER INFORMATION

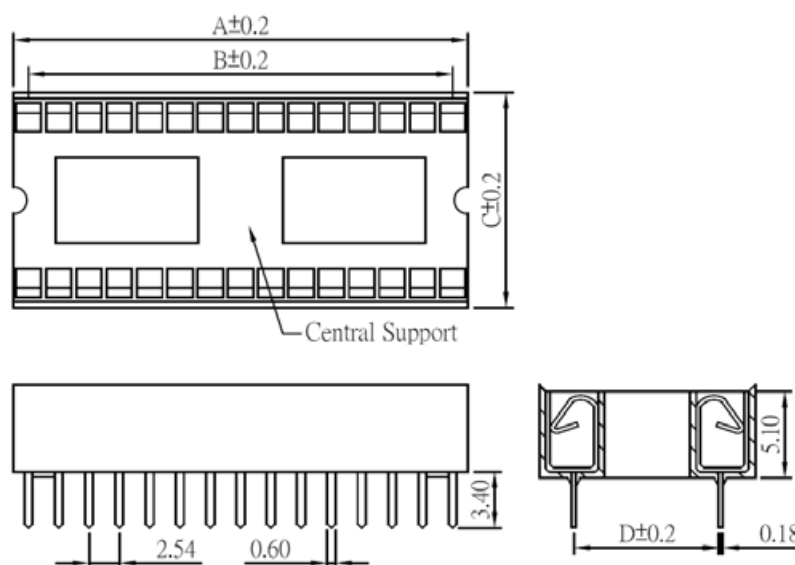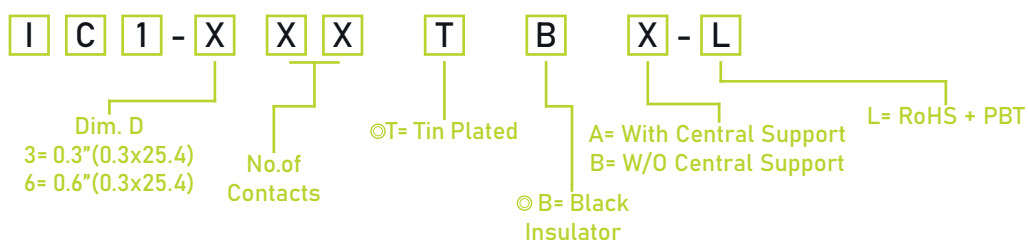

A, B, C, D Tolerance is ±0.2

No. of Conatcts	6-B	8-B	14-B	16-B	18-B	20-B	22-B	24-A	28-A	32-A	24-A 24-B	28-A 28-B	32-A 32-B	40-A 40-B	48-B
A	7.62	10.16	17.78	20.32	22.86	25.40	27.94	30.48	35.56	40.64	30.48	35.56	40.64	50.80	60.96
B	5.08	7.62	15.24	17.78	20.32	22.86	25.40	27.94	33.02	38.10	27.94	33.02	38.10	48.26	58.42
C	10.00										17.50				
D	7.62										15.24				
	IC1-3XX										IC1-6XX				