

PIN HEADER 1.0mm


Pin Header 1.0mm 2 Row H=1.0/1.5mm Straight Type

Specifications

Current Rate: 1 AMP | Insulation Resistance: 1000MΩ | Max. Contact Resistance: 20mΩ |
Max. Dielectric Voltage: 500V AC for one minute | Operation Temperature: -40°C to +105°C





Material

Insulator: Polyester, UL 94V-0 | Standard: Nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated



ORDER INFORMATION

P	H	5	S	1	0	-	2	X	X	X	N	X	X	S	PA/PC	X
PD						No. of Pins		Insulator Material		Contact Plating		PA/PC= Pin Length		Packing		
10= 1.0mm 15= 1.5mm						2x40		Option A= BK-PBT B= BK-PA66 C= BK-PA6T D= BK-PA46 F= BK-LCP		G0= Gold Flash G2= 5U" Gold G3= 10U" Gold G4= 15U" Gold G5= 30U" Gold S0= Gold Flash/ Tin SN= Tin				0= PE Bag A= Tray T= Tube P= Tube+Cap R= Reel+Cap		

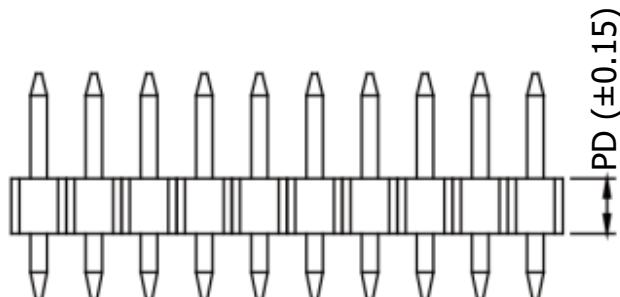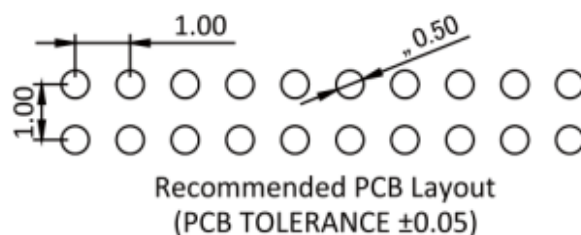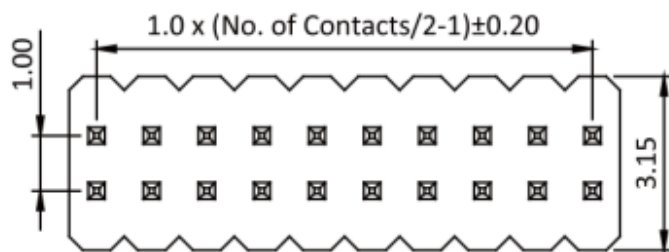

PD
1.00mm
1.50mm

ITEM	PA	PC
Standard	1.90	1.20
Alternate		