

SMD PIEZO TRANSDUCER

SMD piezo buzzer 10mm low voltage

TOPTTEK®

HARDWARE ELECTRONIC COMPONENTS




www.toptek-co.com



SPECIFICATION MODEL: T1030AS-HL-05-5.2-10-R

1	Rated Voltage (Vp-p)	5
2	Max Input Voltage (Vp-p)	1 ~ 30
3	Rated Current (mA)	≤ 5
4	Resonance Frequency (KHz)	5.2 ± 0.5
5	Capacitance at 120Hz (pF)	10000 ± 30%
6	Sound Output at 10cm (dB)	≥ 75
7	Operating Temperature (°C)	-20 ~ +70
8	Storage Temperature (°C)	-40 ~ +85
9	Weight (g)	0.25
10	Housing Material	LCP

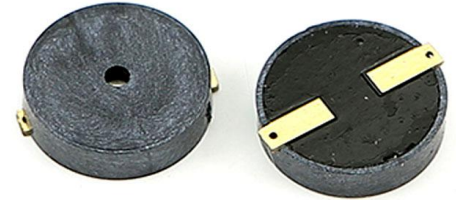

Tolerance: ±0.5mm Except Specified

