


## 2.0mm Terminal / Housing

Specifications  
 Current Rating: 2A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C to +85°C  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1000V AC/minute  
 Material:Nylon 66,UL94V-0

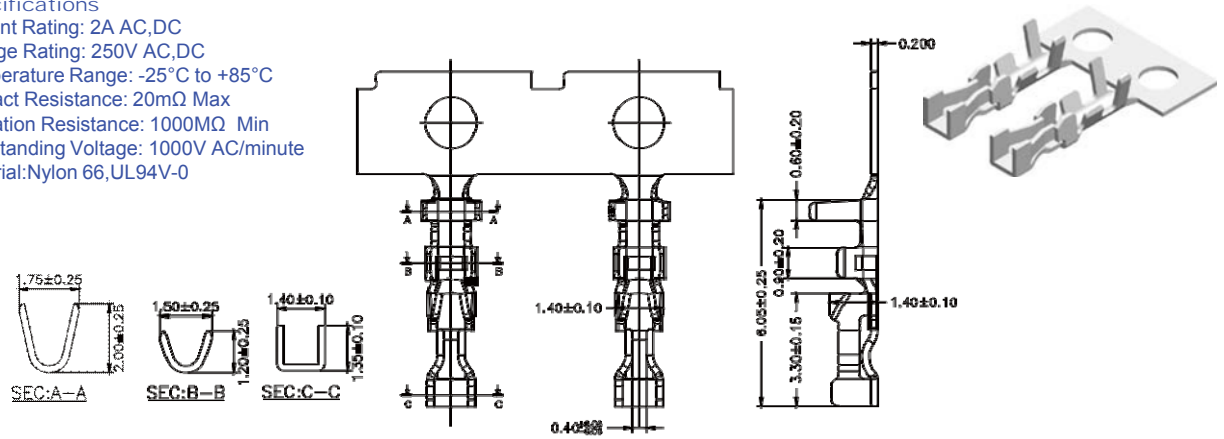


Part No.	Wire Range	Insulation O.D.	Material	Finish
2000-TTP-L	#26-#30	1.40mm(Max)	Phosphor Bronze	Tin Plated
2000-TGP-L				Gold Plated

**Part No.:2000-T-L**



**Housing Wafer Terminal**

No. of Contacts	Dimensions		No. of Contacts	Dimensions	
	A	B		A	B
2x2	2.00	4.20	2x22	42.00	44.20
2x3	4.00	6.20	2x23	44.00	46.20
2x4	6.00	8.20	2x24	46.00	48.20
2x5	8.00	10.20	2x25	48.00	50.20
2x6	10.00	12.20	2x26	50.00	52.20
2x7	12.00	14.20	2x27	52.00	54.20
2x8	14.00	16.20	2x28	54.00	56.20
2x9	16.00	18.20	2x29	56.00	58.20
2x10	18.00	20.20	2x30	58.00	60.20
2x11	20.00	22.20	2x31	60.00	62.20
2x12	22.00	24.20	2x32	62.00	64.20
2x13	24.00	26.20	2x33	64.00	66.20
2x14	26.00	28.20	2x34	66.00	68.20
2x15	28.00	30.20	2x35	68.00	70.20
2x16	30.00	32.20	2x36	70.00	72.20
2x17	32.00	34.20	2x37	72.00	74.20
2x18	34.00	36.20	2x38	74.00	76.20
2x19	36.00	38.20	2x39	76.00	78.20
2x20	38.00	40.20	2x40	78.00	80.20
2x21	40.00	42.20			

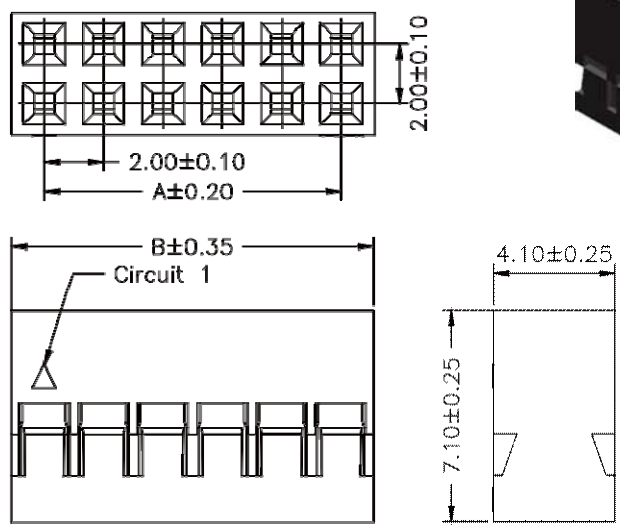

**Part No.:2000H-2XXB-L**

No. of Contacts	Dimensions		No. of Contacts	Dimensions	
	A	B		A	B
2	2.00	4.20	17	32.00	34.20
3	4.00	6.20	18	34.00	36.20
4	6.00	8.20	19	36.00	38.20
5	8.00	10.20	20	38.00	40.20
6	10.00	12.20	21	40.00	42.20
7	12.00	14.20	22	42.00	44.20
8	14.00	16.20	23	44.00	46.20
9	16.00	18.20	24	46.00	48.20
10	18.00	20.20	25	48.00	50.20
11	20.00	22.20	26	50.00	52.20
12	22.00	24.20	27	52.00	54.20
13	24.00	26.20	28	54.00	56.20
14	26.00	28.20	29	56.00	58.20
15	28.00	30.20	30	58.00	60.20
16	30.00	32.20			

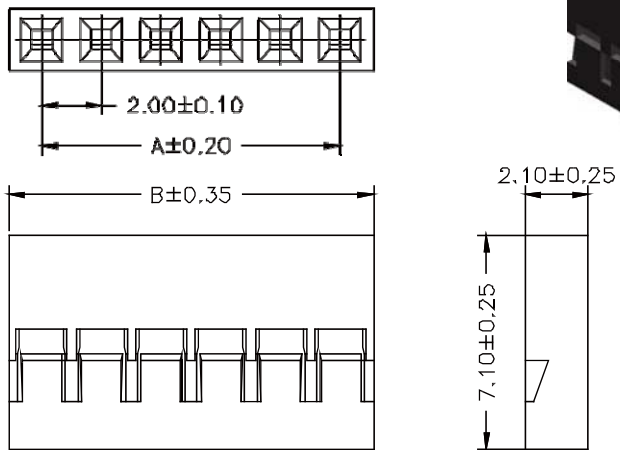

**Part No.:2000H-1XXB-L**