


2.0mm Terminal / Housing / Wafer SMT Straight / SMT R/A Type

Specifications


Current Rating: 2A AC,DC
Voltage Rating: 100V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 800V AC/minute
Terminal: Brass / Gold Plated
Solder Tabs: Brass / Gold Plated
Material: Housing: Nylon 66, UL94V-0
Wafer: Nylon 6T, UL94V-0

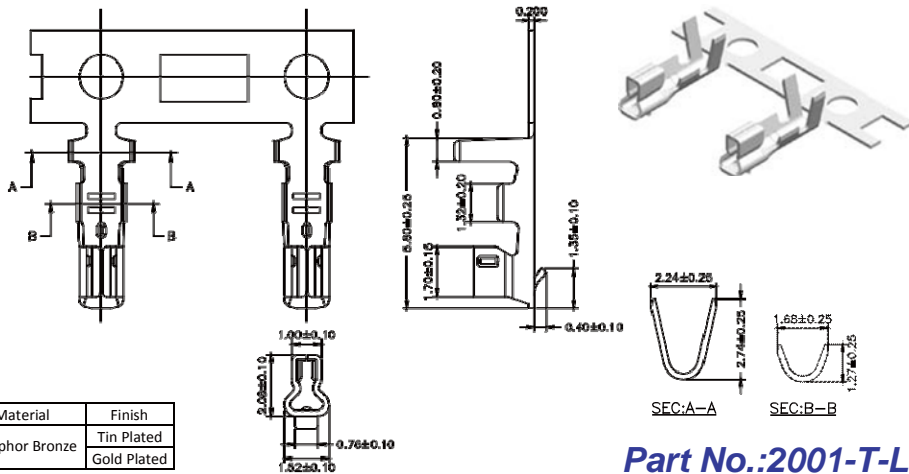


Part No.	Wire Range	Insulation O.D.	Material	Finish
2001-TTP-L	#24-#30	1.50mm(Max)	Phosphor Bronze	Tin Plated
2001-TGP-L				Gold Plated

Part No.:2001-T-L

No. of Contacts	Dimensions	
	A	B
2	2.00	5.80
3	4.00	7.80
4	6.00	9.80
5	8.00	11.80
6	10.00	13.80
7	12.00	15.80
8	14.00	17.80
9	16.00	19.80
10	18.00	21.80
11	20.00	23.80
12	22.00	25.80
13	24.00	27.80
14	26.00	29.80
15	28.00	31.80
16	30.00	33.80

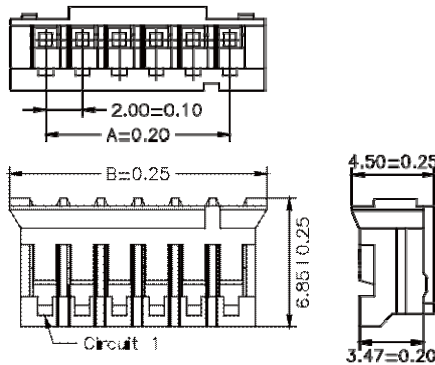


Part No.:2001H-XXW-L




PCB LAYOUT


No. of Contacts	Dimensions	
	A	B
2	2.00	8.00
3	4.00	10.00
4	6.00	12.00
5	8.00	14.00
6	10.00	16.00
7	12.00	18.00
8	14.00	20.00
9	16.00	22.00
10	18.00	24.00
11	20.00	26.00
12	22.00	28.00
13	24.00	30.00
14	26.00	32.00
15	28.00	34.00
16	30.00	36.00

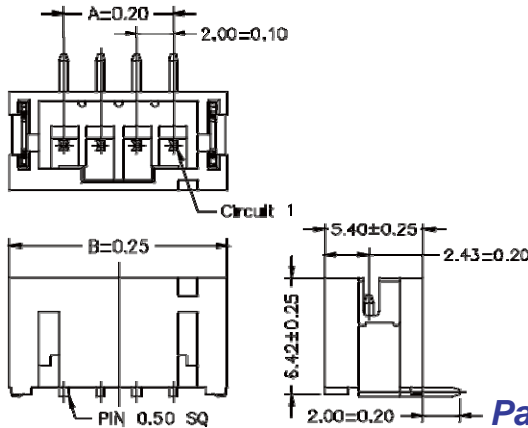

Part No.:2001MS-XXGW-U



PCB LAYOUT

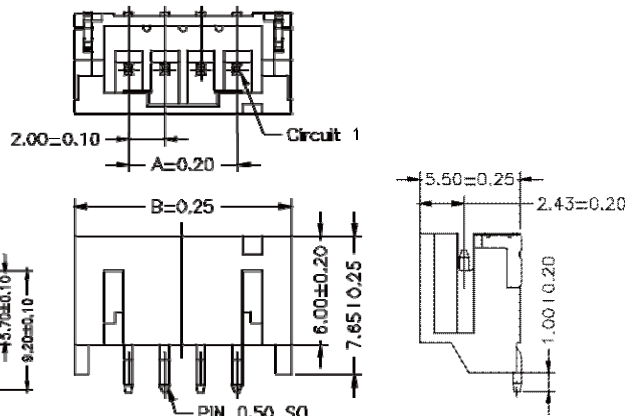

Part No.:2001MR-XXGW-U