

TACT SWITCH

6X6 tact switch SMD



SPECIFICATION MODEL: SWTA6647-B-X-XXX-X

1	Operating Temperature	-30°C to +85°C
2	Rating	50mA, 12V DC
3	Insulation Resistance	100MΩ min. 100V DC
4	Dielectric Strength	250V AC for 1 min.
5	Contact Resistance	100mΩ max.
6	Life	50.000, 100.000 or 300.000 Cycles
7	Travel	0.25 ± 0.1mm
8	Operating Force	D:70 A:90 E:130 J:160 C:250 G:320 H:400 I:520gf

ORDER INFORMATION



S W T A 6 6 4 7 - B - X - X

Stem Color
B= Black
W= White
R= Red
D= Dark Gray
N= Brown
S= Salmon




Operating Force
D= 70gf
A= 90gf
E= 130gf
J= 160gf
C= 250gf
G= 320gf
H=400gf
I= 520gf

TOPTEK®
HARDWARE ELECTRONIC COMPONENTS

www.toptek-co.com

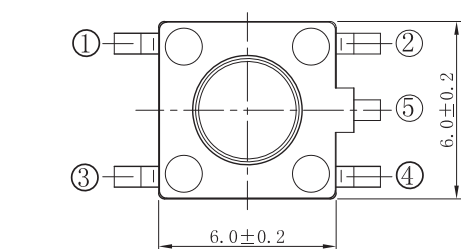

CIRCUIT DIAGRAM

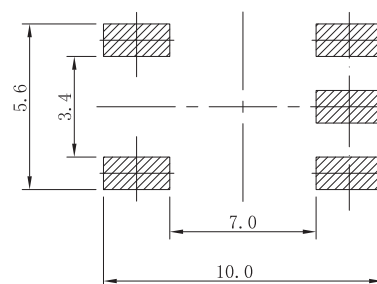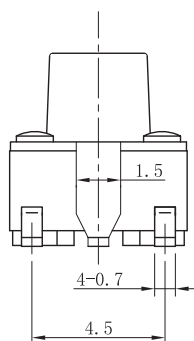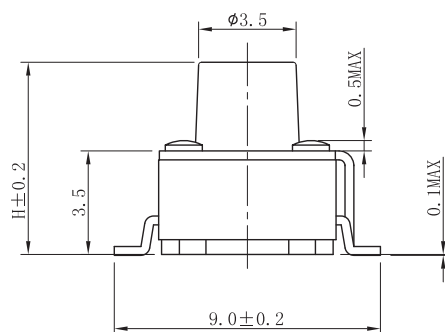

P.C.B LAND DIMENSION