

# MACHINE PIN SOCKET

Machine Pin Socket SMT Type 2.54mm

**TOPTTEK**<sup>®</sup>

HARDWARE ELECTRONIC COMPONENTS



RoHS 2002/95/EC

## Specifications


Current Rate: 3 AMP | Insulation Resistance:  $\geq 1000\text{M}\Omega$  at  $V=100\text{V}$  | Contact Resistance:  $\leq 4\text{m}\Omega/\text{Contact}$  | Dielectric Voltage: 1000V AC for one minute | Operation Temperature:  $-40^{\circ}\text{C}$  to  $+105^{\circ}\text{C}$

## Material

Insulator: Polyester, UL 94V-0 | © Standard: PPS | Terminal: Copper Alloy | Plated: Selective Gold



www.toptek-co.com

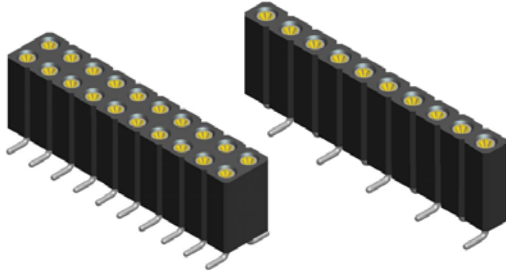

## ORDER INFORMATION

