


SWITCH LIGHT LED

6X6 Led type



SPECIFICATION MODEL: T626-X-X

1	Operating Temperature	-25°C to +85°C
2	Rating	50mA, 30V DC
3	Insulation Resistance	100MΩ min. 250V DC
4	Dielectric Strength	AC250V (50-60Hz) for 1 min.
5	Contact Resistance	100mΩ max.
6	Life	100.000 Cycles Min
7	Operating Force	J:160gf C:250gf
8	Travel	0.25 ± 0.1mm





ORDER INFORMATION

T 6 2 6 - X - X

Led Color
 N= Without
 R= Red
 Y= Yellow
 G= Green
 U= Blue
 W= White
 O= Orange
 R/U= Red/Blue

Operating Force
 J= 160gf
 C= 250gf

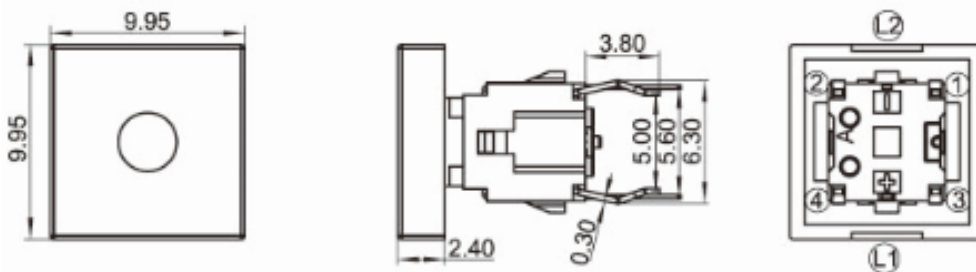

Color	VR	IF	Recommended Operating	IF	
				Nom	Max
White	DC5V	20mA	20mA	3.0V	3.6V
Red	DC5V	20mA	20mA	1.7V	2.4V
Yellow	DC5V	20mA	20mA	1.9V	2.4V
Blue	DC5V	20mA	20mA	3.0V	3.6V
Green	DC5V	20mA	20mA	1.9V	2.4V

