

MACHINE PIN SOCKET

Machine Pin Socket Right Angle Type 2.54mm

TOPTTEK[®]
HARDWARE ELECTRONIC COMPONENTS



RoHS
2002/95/EC

Specifications


Current Rate: 3 AMP | Insulation Resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$ | Contact Resistance: $\leq 4\text{m}\Omega/\text{Contact}$ | Dielectric Voltage: 1000V AC for one minute | Operation Temperature: -40°C to $+105^\circ\text{C}$

Material

Insulator: Polyester, UL 94V-0 | \odot Standard: PPS | Terminal: Copper Alloy | Plated: Selective Gold



www.toptek-co.com

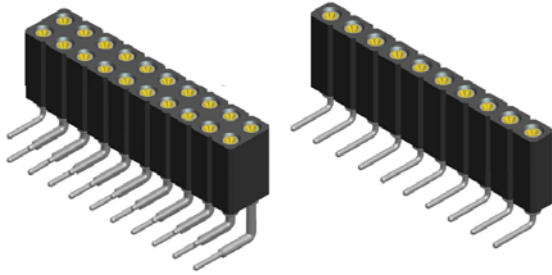

ORDER INFORMATION

