
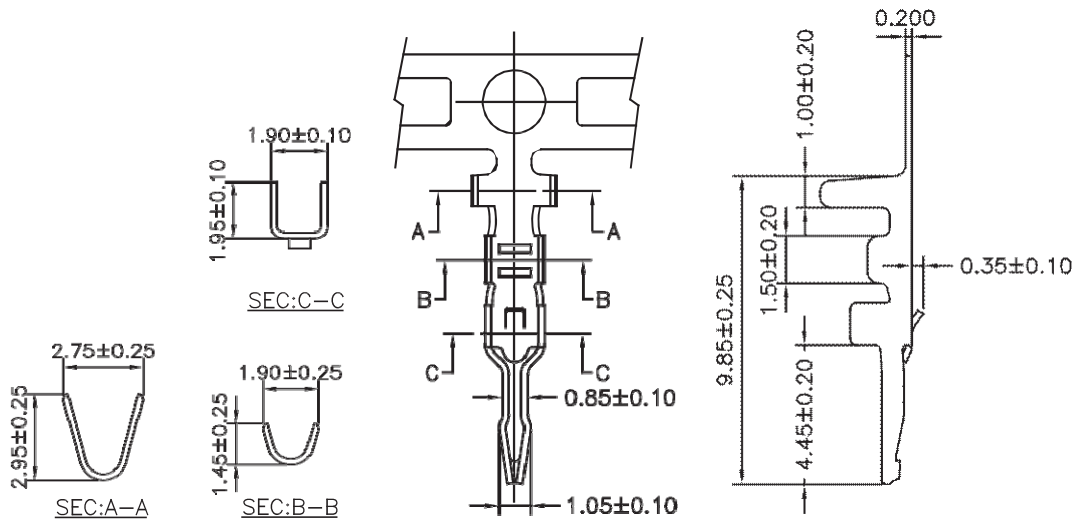


## 2.5mm Terminal / Housing


### Specifications

Current Rating: 3A AC,DC  
Voltage Rating: 250V AC,DC  
Temperature Range: -25°C to +85°C  
Contact Resistance: 10mΩ Max  
Insulation Resistance: 1000MΩ Min  
Withstanding Voltage: 800V AC/minute  
Material: Nylon 66,UL94V-0







| Wire Range | Insulation O.D. | Material | Finish     |
|------------|-----------------|----------|------------|
| #22-#28    | 1.70mm(Max)     | Brass    | Tin Plated |

Part No.:2501-T-L



| No. of Contacts | Dimensions |       |
|-----------------|------------|-------|
|                 | A          | B     |
| 2               | 2.50       | 6.50  |
| 3               | 5.00       | 9.00  |
| 4               | 7.50       | 11.50 |
| 5               | 10.00      | 14.00 |
| 6               | 12.50      | 16.50 |
| 7               | 15.00      | 19.00 |
| 8               | 17.50      | 21.50 |
| 9               | 20.00      | 24.00 |
| 10              | 22.50      | 26.50 |
| 11              | 25.00      | 29.00 |
| 12              | 27.50      | 31.50 |
| 13              | 30.00      | 34.00 |
| 14              | 32.50      | 36.50 |
| 15              | 35.00      | 39.00 |
| 16              | 37.50      | 41.50 |

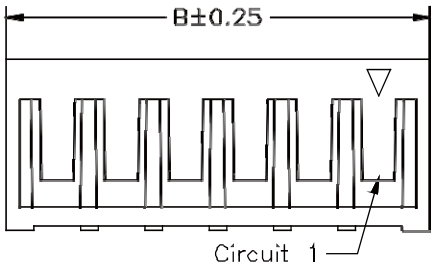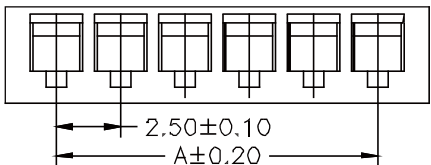

Part No.:2501H-XXW-L