


2.54mm Mini Latch Wafer SMT R/A / Right Angle / Straight Type


Specifications
 Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C to +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Terminal: Brass / Gold Plated
 Material: 2545MR: Nylon 6T, UL94V0
 other: P.B.T, UL94V0

| No. of Contacts | Dimensions | | No. of Contacts | Dimensions | |
|-----------------|------------|-------|-----------------|------------|-------|
| | A | B | | A | B |
| 2 | 2.54 | 7.59 | 8 | 17.78 | 22.83 |
| 3 | 5.08 | 10.13 | 9 | 20.32 | 25.37 |
| 4 | 7.62 | 12.67 | 10 | 22.86 | 27.91 |
| 5 | 10.16 | 15.21 | 11 | 25.40 | 30.45 |
| 6 | 12.70 | 17.75 | 12 | 27.94 | 32.99 |
| 7 | 15.24 | 20.29 | | | |

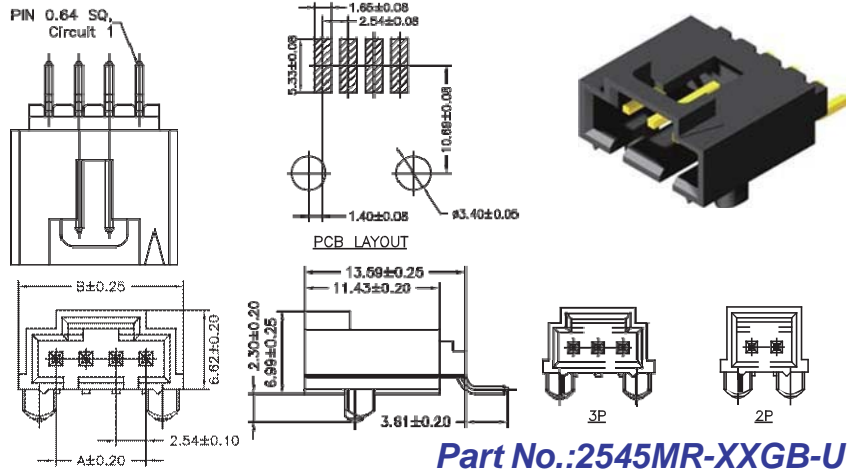


Part No.:2545MR-XXGB-U

| No. of Contacts | Dimensions | |
|-----------------|------------|-------|
| | A | B |
| 2 | 2.54 | 7.59 |
| 3 | 5.08 | 10.13 |
| 4 | 7.62 | 12.67 |
| 5 | 10.16 | 15.21 |
| 6 | 12.70 | 17.75 |
| 7 | 15.24 | 20.29 |
| 8 | 17.78 | 22.83 |
| 9 | 20.32 | 25.37 |
| 10 | 22.86 | 27.91 |
| 11 | 25.40 | 30.45 |
| 12 | 27.94 | 32.99 |

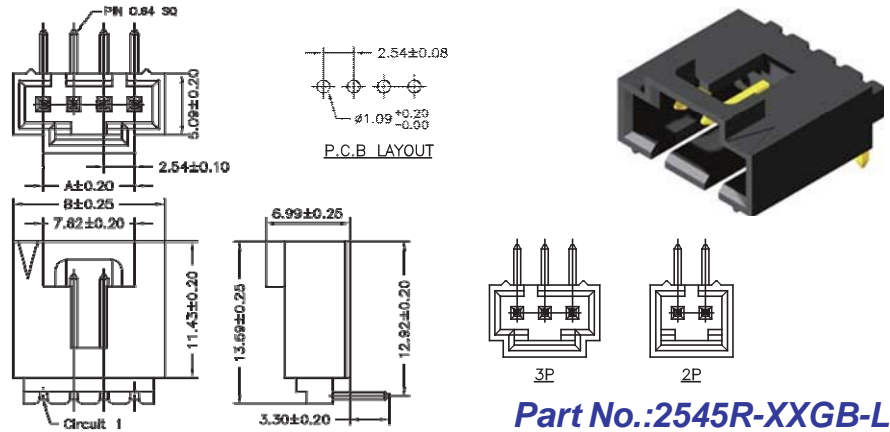


Part No.:2545R-XXGB-L

| No. of Contacts | Dimensions | |
|-----------------|------------|-------|
| | A | B |
| 2 | 2.54 | 8.89 |
| 3 | 5.08 | 11.43 |
| 4 | 7.62 | 13.97 |
| 5 | 10.16 | 16.51 |
| 6 | 12.70 | 19.05 |
| 7 | 15.24 | 21.59 |
| 8 | 17.78 | 24.13 |
| 9 | 20.32 | 26.67 |
| 10 | 22.86 | 29.21 |
| 11 | 25.40 | 31.75 |
| 12 | 27.94 | 34.29 |

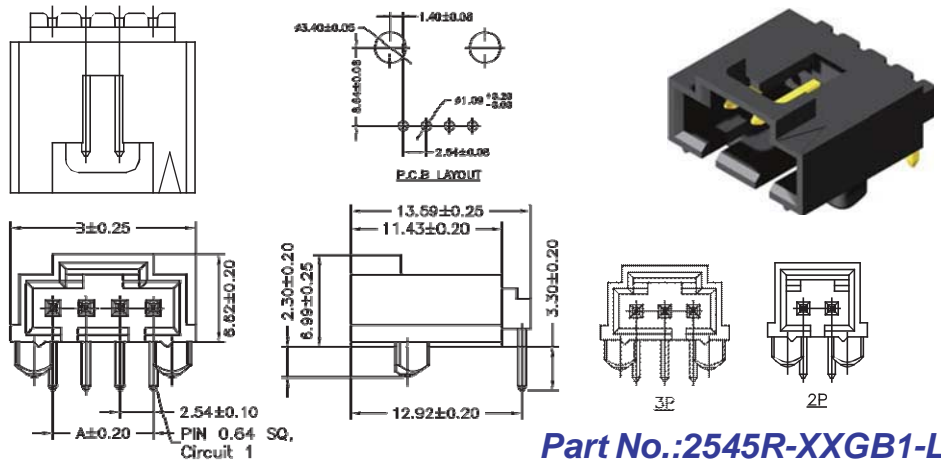

Part No.:2545R-XXGB1-L

| No. of Contacts | Dimensions | |
|-----------------|------------|-------|
| | A | B |
| 3 | 5.08 | 10.17 |
| 4 | 7.62 | 12.71 |
| 5 | 10.16 | 15.25 |
| 6 | 12.70 | 17.79 |
| 7 | 15.24 | 20.33 |
| 8 | 17.78 | 22.87 |
| 9 | 20.32 | 25.41 |
| 10 | 22.86 | 27.95 |
| 11 | 25.40 | 30.49 |
| 12 | 27.94 | 33.03 |

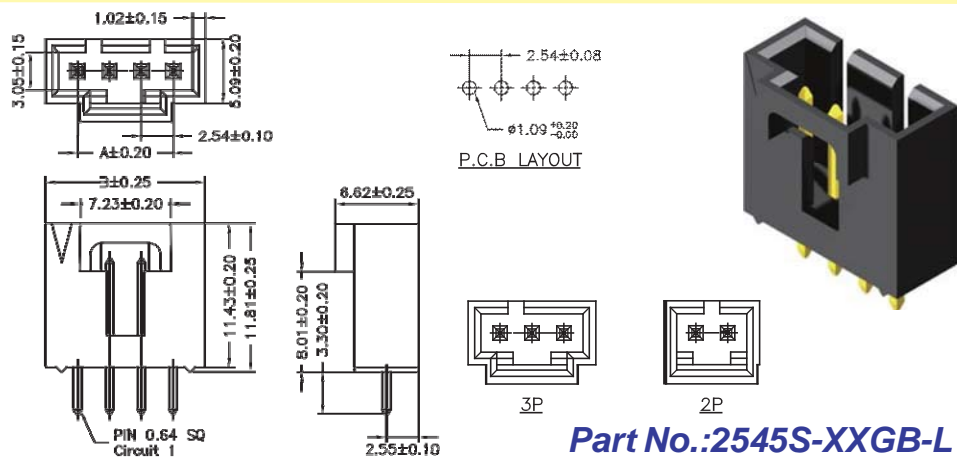

Part No.:2545S-XXGB-L