

D SUB CONNECTORS

D-SUB Machine Pin Angle Type



Specifications

Current Rate: 3 AMP | Insulation Resistance: 1000MΩ Min. | Contact Resistance: 20mΩ Max. |
Dielectric Voltage: 500V AC for one minute | Operation Temperature: -55°C to +105°C

Material


Contacts: Copper Alloy | Insulator: PBT UL 94V-0 Rated

TOPTTEK[®]


HARDWARE ELECTRONIC COMPONENTS



www.toptek-co.com

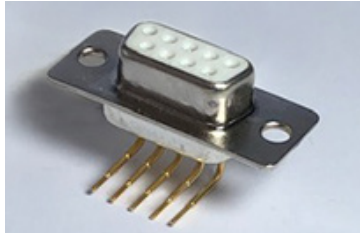

ORDER INFORMATION

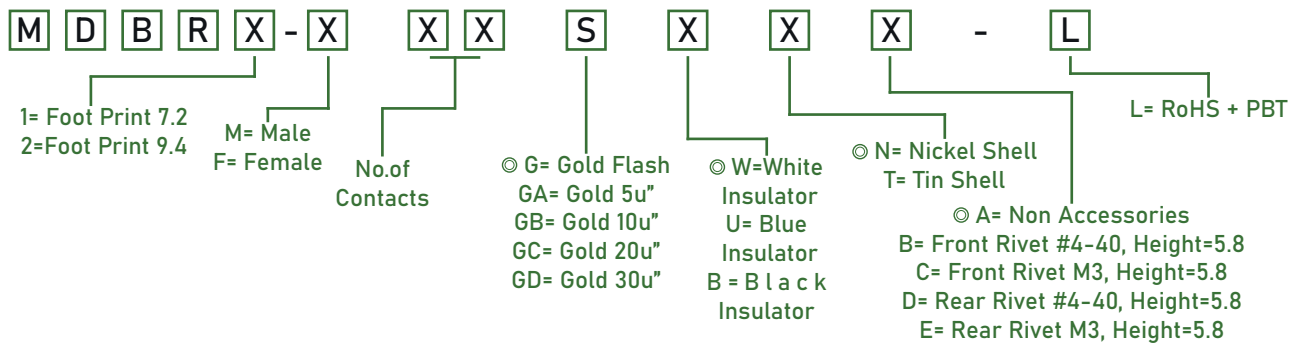

No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim F
9	30.81	24.99	16.33	11.08	19.20	
15	39.14	33.32	24.66	19.39	27.70	2.54
25	53.04	47.04	38.38	33.24	41.10	
37	69.32	63.50	54.84	49.86	57.30	2.84

