

D SUB CONNECTORS

D-SUB Slim Right Angle Type



Specifications

Current Rate: 3 AMP | Insulation Resistance: 1000MΩ Min. | Contact Resistance: 20mΩ Max. |
Dielectric Voltage: 500V AC for one minute | Operation Temperature: -55°C to +105°C


Material

Insulator: Polyester, UL 94V-0 | © Standard: PBT | Terminal: Copper Alloy


TOPTEK®
HARDWARE ELECTRONIC COMPONENTS



www.toptek-co.com



ORDER INFORMATION

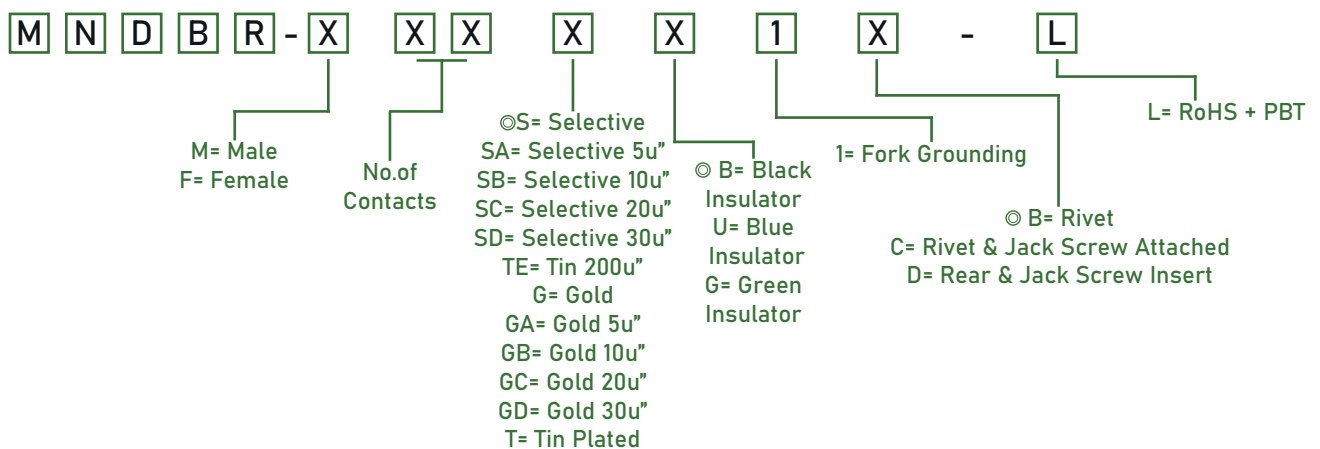

No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E
9(Male)	30.81	24.99	16.92	14.00	0.30
9(Female)	30.81	24.99	16.33	16.00	0.60
15	39.14	33.32	24.66	25.64	0.60
25	53.04	47.04	38.38	39.54	0.60

