

SOCKET CONNECTORS

Stamped Pin IC Socket 1.778mm

TOPTTEK®

HARDWARE ELECTRONIC COMPONENTS



www.toptek-co.com




RoHS
2002/95/EC

Specifications



Current Rate: 5 AMP | Insulation Resistance: 5000MΩ Min | Contact Resistance: 20mΩMax | Dielectric Voltage: 500V AC for one minute | Operation Temperature: -55°C to +105°C

Material

Insulator: Polyester, UL 94V-0 | © Standard: P.B.T | Terminal: Copper Alloy | Plated: Tin Plated



ORDER INFORMATION

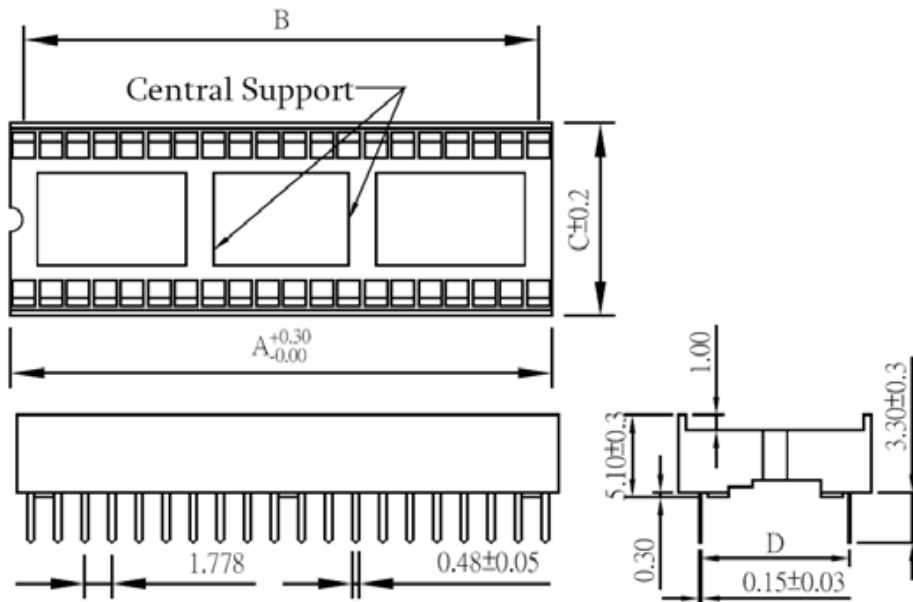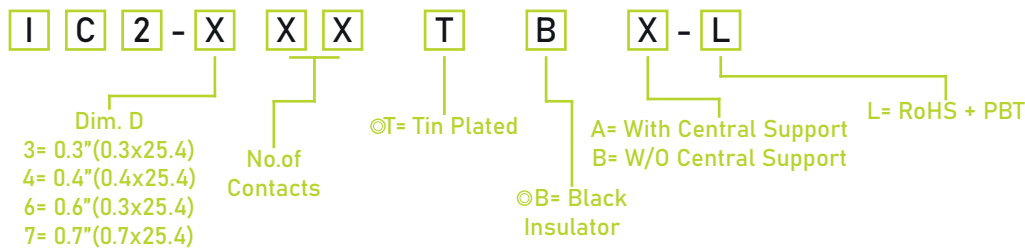

A, B, C, D Tolerance is ±0.2

No. of Conatcts	16-B	20-B	22-B	24-B	24-A	28-A	30-A	32-A	40-A	42-A	48-A	52-A	54-A	56-A	58-A	60-A	62-A	64-A	64-A
A	14.22	17.78	19.56	21.34	21.34	24.89	26.67	28.45	35.56	37.34	42.67	46.23	48.01	49.78	51.56	53.54	55.12	56.90	56.90
B	12.45	16.00	17.78	19.56	19.56	23.11	24.89	26.67	33.78	35.56	40.89	44.45	46.23	48.01	49.78	51.56	53.34	55.12	55.12
C	10.10			12.65			17.70			21.55									
D	7.62			10.16			15.24			19.05									
	IC2-3-XX			IC2-4-XX			IC2-6XX			IC2-7-XX									