


Pin-Female Header Connectors 0.8 mm

TOPTEK®


HARDWARE ELECTRONIC MANUFACTURER




www.toptek-co.com

TOPTEK srl
10015 - IVREA (TO) - ITALY
tel. +39 0125 251 211 - fax +39 0341 367 607
info@toptek-co.com

Pin Header 0.8mm 2 Row H=1.4mm SMT & Stack SMT Type

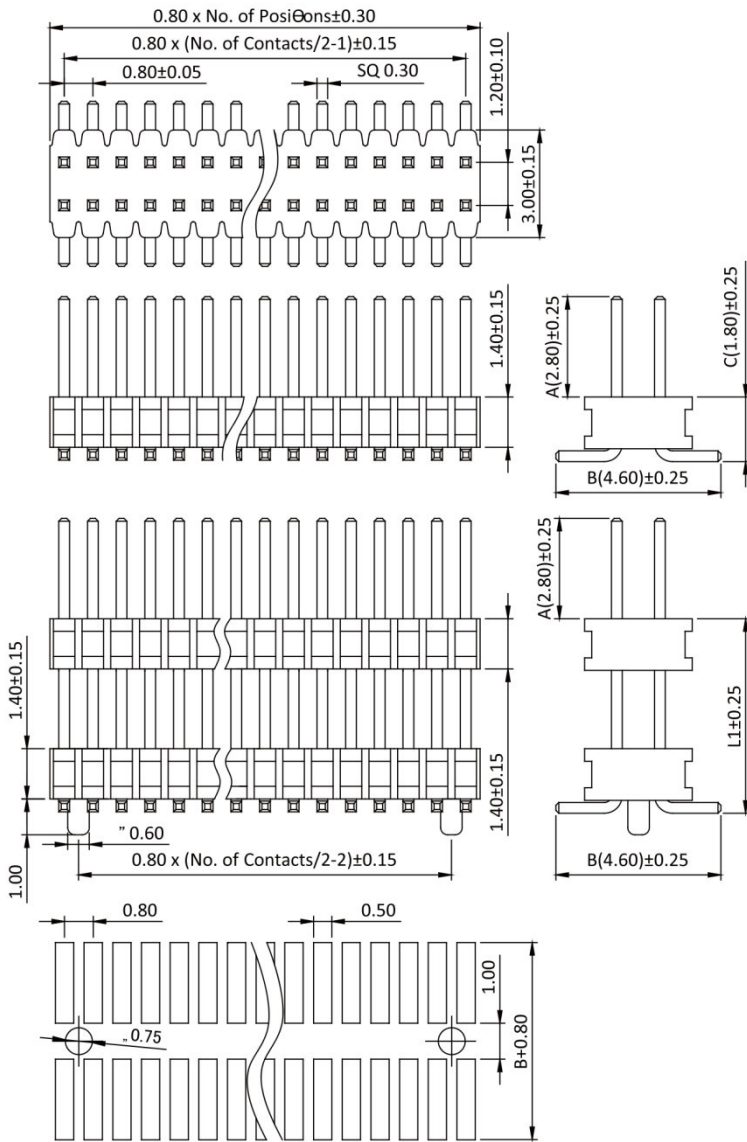

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

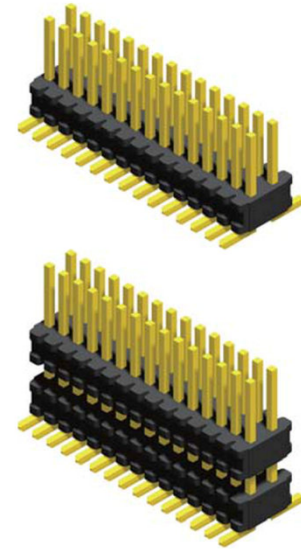

**2
*
1**

Part No.: PH6M14-2XX-U
PH6DM14-2XX-U


Specifications

Current Rate: 1 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C

Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated

ORDER INFORMATION





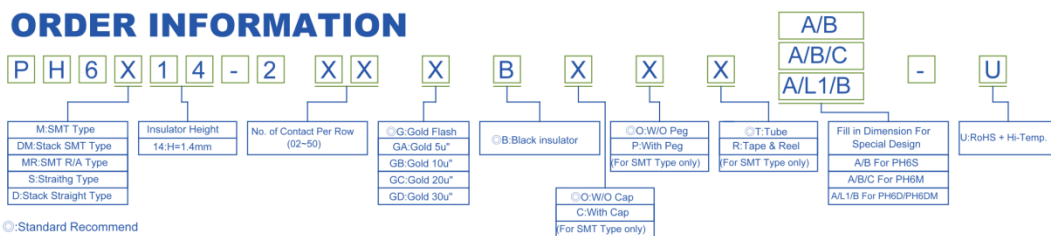


CONNECTOR MANUFACTURERS

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com

Pin Header 0.8mm 2 Row H=1.4mm SMT R/A Type

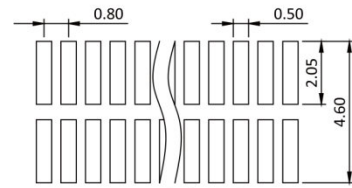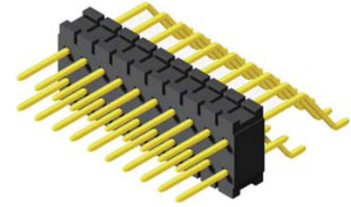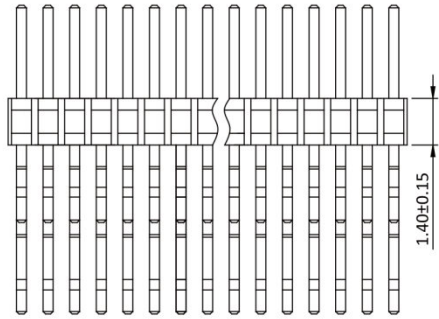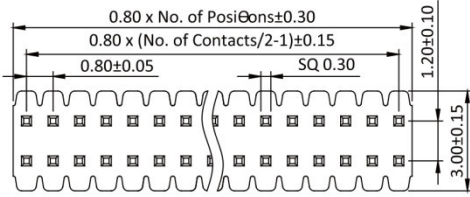

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Part No.: PH6MR14-2XX-U

2 * 2

Pin-Female Header 0.8 mm

P

Pb

RoHS


Specifications

Current Rate: 1 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C








Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated


ORDER INFORMATION

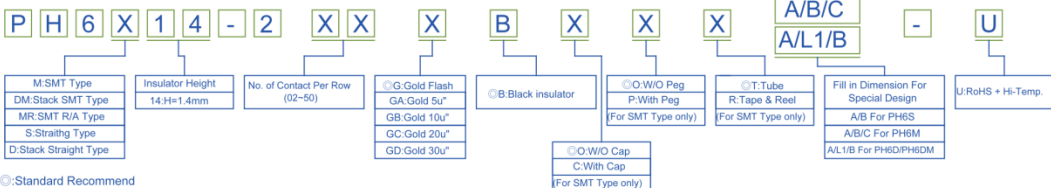

Pin Header 0.8mm 2 Row H=1.4mm Straight & Stack Straight

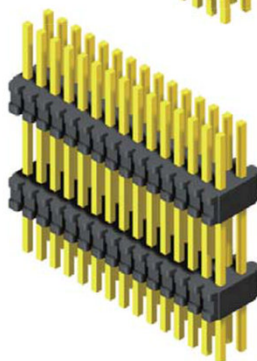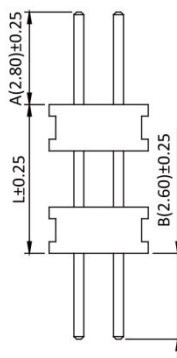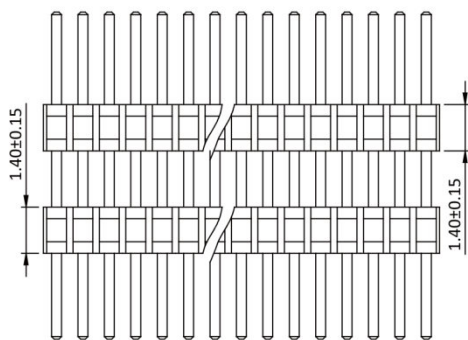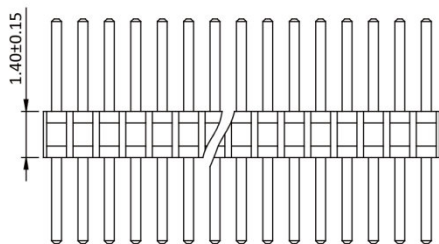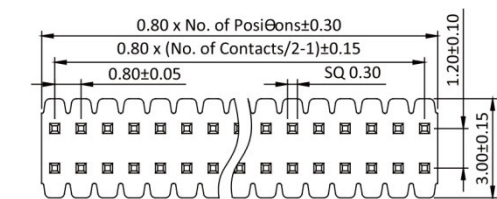

2
*
3



Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Part No.: PH6S14-2XX-U
PH6D14-2XX-U


Specifications

Current Rate: 1 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C

Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated

ORDER INFORMATION




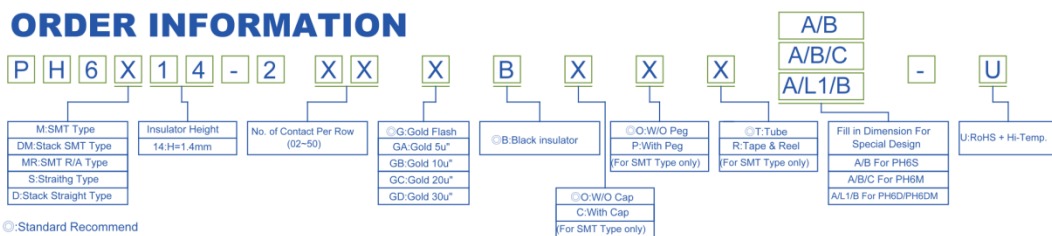


CONNECTOR MANUFACTURERS

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com

Female Header 0.8mm H=3.1mm 2 Row SMT Type

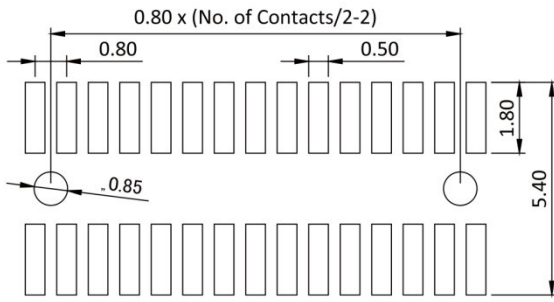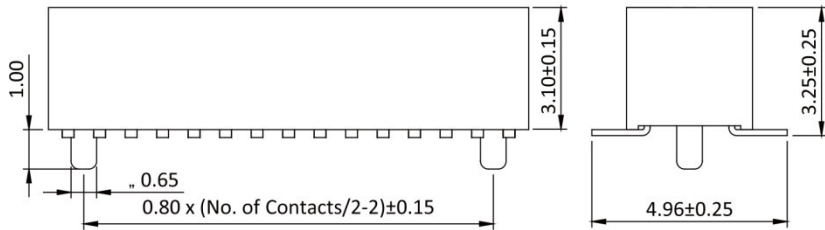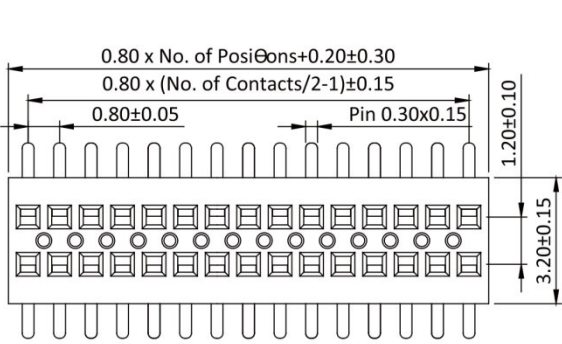


Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Part No.: PS6M31-2XX-U

Specifications
Current Rate: 1 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 500V AC for one minute
Operation Temperature: -40°C to +105°C

Material
Insulator: Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated

ORDER INFORMATION

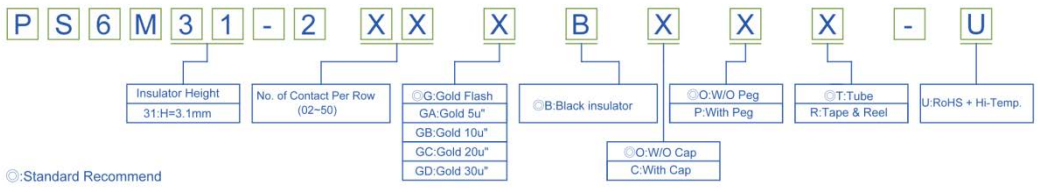

2 * 4

P in-Female Header 0.8 mm



RoHS