

# PIN HEADER 0.8mm

## Pin Header 0.8mm 2 Row H=1.40mm SMT R/A Type




### Specifications

Current Rate: 1 AMP | Insulation Resistance: 1000MΩ | Max. Contact Resistance: 20mΩ |  
 Max. Dielectric Voltage: 500V AC for one minute | Operation Temperature: -40°C to +105°C

### Material



Insulator: Polyester, UL 94V-0 | Standard: Nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated



## ORDER INFORMATION

**P H 6 M R 1 4 - 2 X X X N X X Z X**

<p>No. of Pins Pr Row</p> <p>2x40</p>	<p>Insulator Material Option</p> <p>A=BK-PBT B=BK-PA66 C=BK-PA6T D=BK-PA46 F=BK-LCP</p>	<p>Contact Plating</p> <p>G0= Gold Flash G2= 5U" Gold G3= 10U" Gold G4= 15U" Gold G5= 30U" Gold S0= Gold Flash/ Tin SN= Tin</p>	<p>Packing</p> <p>0= PE Bag A= Tray T= Tube P= Tube+Cap R= Reel+Cap</p>
---	---	---	---

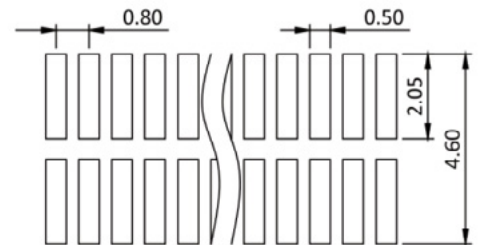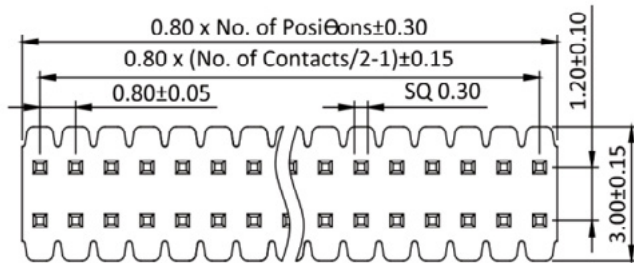

Recommended PCB Layout  
(PCB TOLERANCE ±0.05)

