

MACHINE PIN SOCKET

Machine Pin Socket IC Type 1.778mm

TOPTTEK[®]
HARDWARE ELECTRONIC COMPONENTS



RoHS 2002/95/EC

Specifications


Current Rate: 3 AMP | Insulation Resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$ | Contact Resistance: $\leq 4\text{m}\Omega/\text{Contact}$ | Dielectric Voltage: 60V AC for one minute | Operation Temperature: -40°C to $+105^\circ\text{C}$

Material





Insulator: Polyester, UL 94V-0 | \odot Standard: PPS | Terminal: Copper Alloy | Plated: Selective Gold



www.toptek-co.com



ORDER INFORMATION

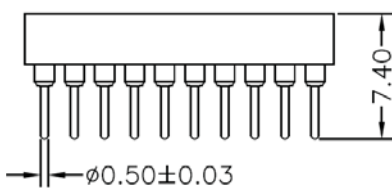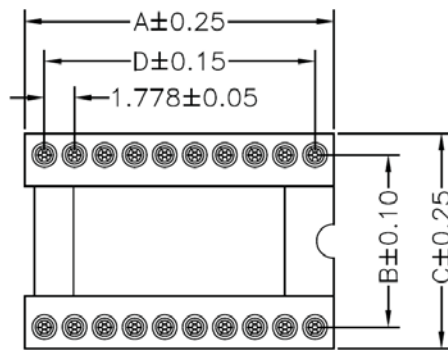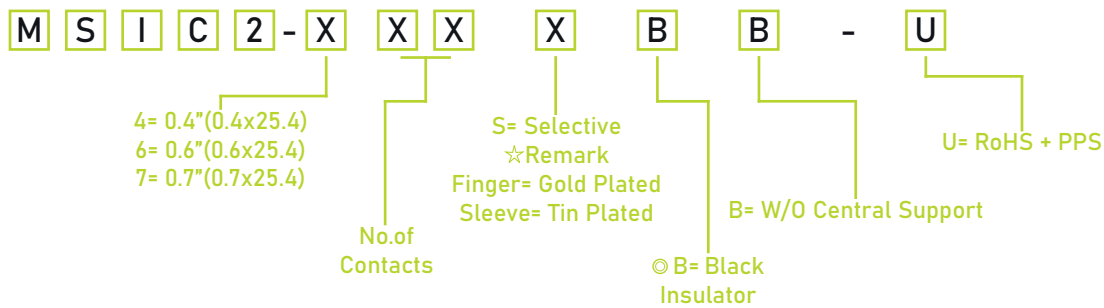

No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D	
24	21.80	10.16	12.70	19.558	0.4"
28	25.20	10.16	12.70	23.114	
30	27.17	10.16	12.70	24.892	
32	28.948	10.16	12.70	26.670	
48	43.172	10.16	12.70	40.894	
No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D	
20	18.28	15.24	17.64	16.002	0.6"
24	21.836	15.24	17.64	19.558	
28	25.392	15.24	17.64	23.114	
40	35.80	15.24	17.64	33.782	
42	37.70	15.24	17.64	35.560	
48	43.10	15.24	17.64	40.894	
52	46.70	15.24	17.64	44.450	
56	50.20	15.24	17.64	48.006	
No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D	
64	57.30	15.24	17.64	55.118	0.7"
68	60.90	15.24	17.64	58.674	
No. of Contacts	Dim. A	Dim. B	Dim. C	Dim. D	
64	57.30	19.05	21.45	55.118	