


3.96mm Wafer DIP Type

Specifications


Current Rating: 7A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Material: Nylon 66,UL94V-2

Housing Wafer Terminal

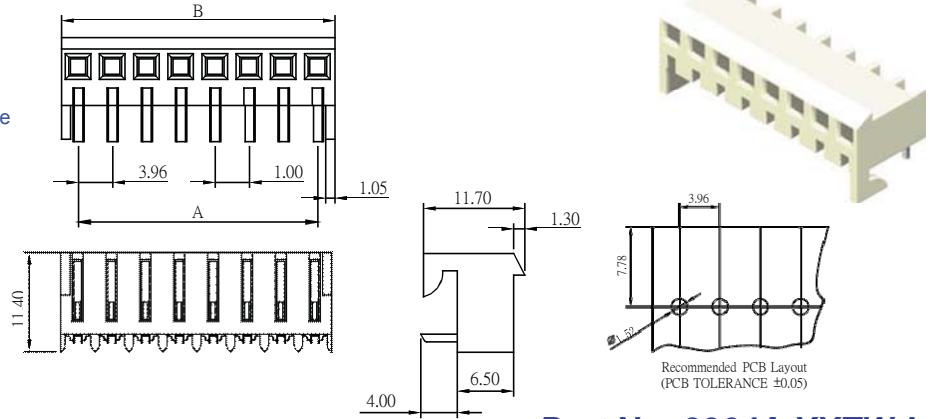


Part No.:3964A-XXTW-L


No. of Contacts	Dimensions	
	A	B
2	3.96	7.82
3	7.92	11.78
4	11.88	15.74
5	15.84	19.70
6	19.80	23.66
7	23.76	27.62
8	27.72	31.58
9	31.68	35.54
10	35.64	39.50
11	39.60	43.46
12	43.56	47.42
13	47.52	51.38
14	51.48	55.34
15	55.44	59.30
16	59.40	63.26
17	63.36	67.22
18	67.32	71.18
19	71.28	75.14
20	75.24	79.10
21	79.20	83.06
22	83.16	87.02
23	87.12	90.98
24	91.08	94.94
25	95.04	98.90

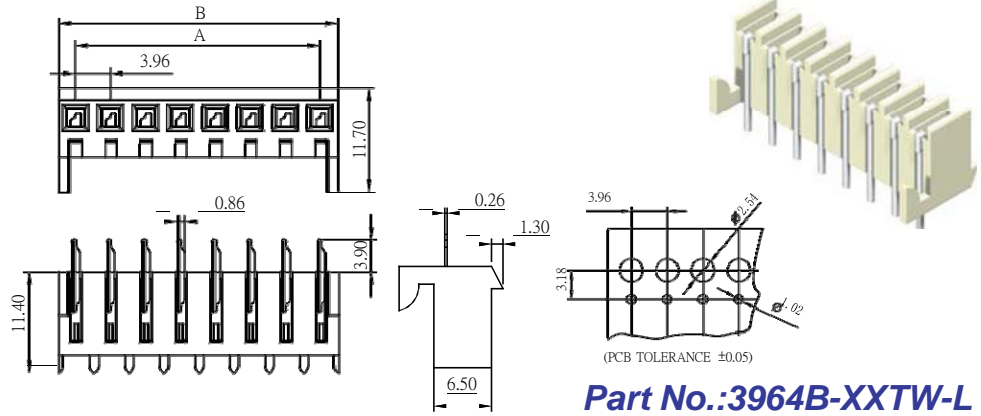

Part No.:3964B-XXTW-L

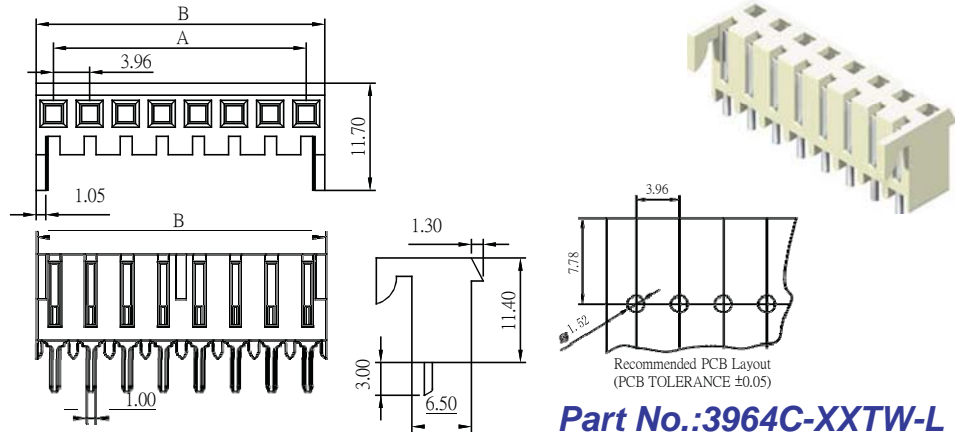

Part No.:3964C-XXTW-L

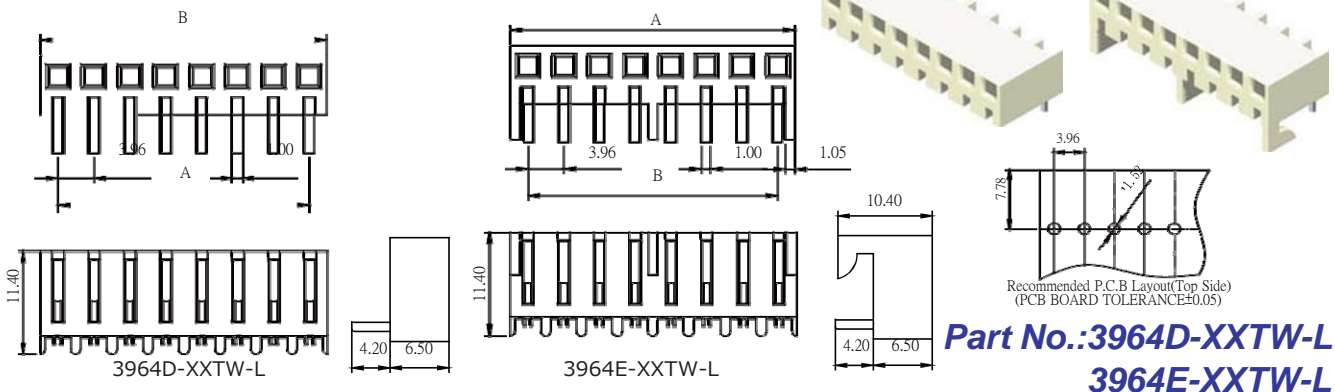

**Part No.:3964D-XXTW-L
3964E-XXTW-L**