

MACHINE PIN HEADER

Machine Pin Header SMT Type 2.54mm

TOPTTEK®

HARDWARE ELECTRONIC COMPONENTS



Specifications


Current Rate: 3 AMP | Insulation Resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$ | Contact Resistance: $\leq 4\text{m}\Omega$ /Contact | Dielectric Voltage: 1000V AC for one minute | Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Material







Insulator: Polyester, UL 94V-0 | © Standard: PPS | Terminal: Copper Alloy | Plated: Gold Plated



www.toptek-co.com

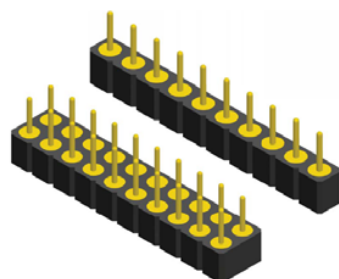

ORDER INFORMATION

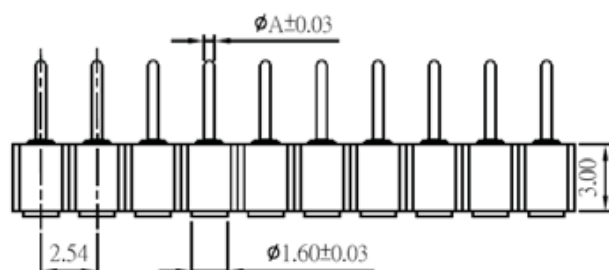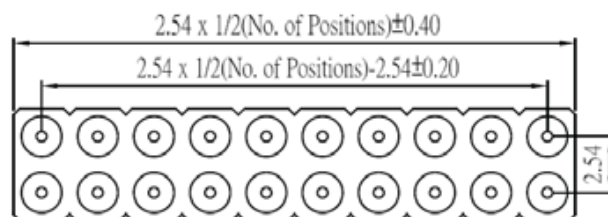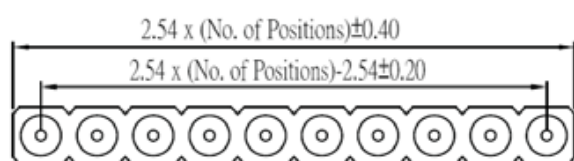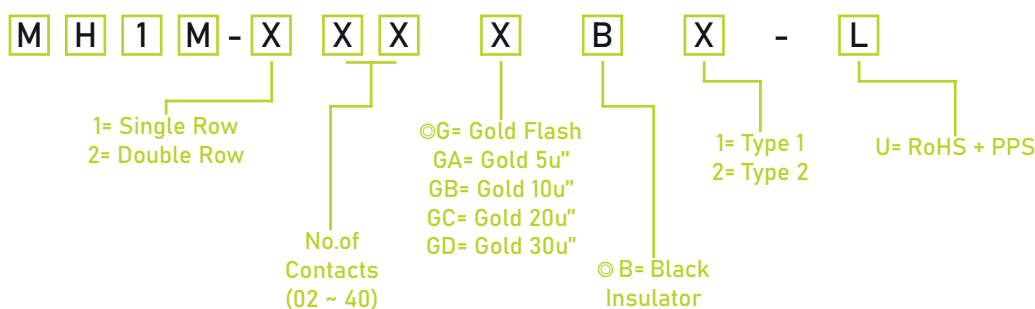

Part No.	Dim A	Dim B
MH1M-1/2XX-1-U	0.47	1.60
MH1M-1/2XX-2-U	0.76	1.81