



PIN HEADER 0.8mm

Pin Header 0.8mm 2 Row H=1.40mm Stack Straight Type

TOPTEK®

HARDWARE ELECTRONIC COMPONENTS



www.toptek-co.com




Specifications

Current Rate: 1 AMP | Insulation Resistance: 1000MΩ | Max. Contact Resistance: 20mΩ |
Max. Dielectric Voltage: 500V AC for one minute | Operation Temperature: -40°C to +105°C

Material

Insulator: Polyester, UL 94V-0 | Standard: Nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated



ORDER INFORMATION

P H 6 D 1 4 - 2 X X X N X X S PA/PC X

No. of Pins
Pr Row

2x40

Insulator
Material
Option


A=BK-PBT
B=BK-PA66
C=BK-PA6T
D=BK-PA46
F=BK-LCP

Contact Plating
G0= Gold Flash
G2= 5U" Gold
G3= 10U" Gold
G4= 15U" Gold
G5= 30U" Gold
S0= Gold Flash/ Tin
SN= Tin

PA/ PC= Pin Length

Packing

0= PE Bag
A= Tray
T= Tube
P= Tube+Cap
R= Reel+Cap

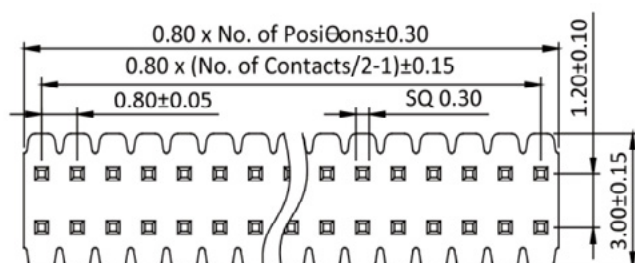

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

