

▶ PLCC SOCKET

PLCC Socket Through Hole Type




Specifications






Current Rate: 1 AMP | Insulation Resistance: $\geq 1000\text{M}\Omega$ at V=100V | Contact Resistance: 30m Ω Max | Dielectric Voltage: 600V AC for one minute | Operation Temperature: -50°C to +105°C

Material

Insulator: Hi Temp, UL 94V-0 | © Standard: PPS | Terminal: Copper Alloy | Plated: "Tin Over 40u" Ni



▶ ORDER INFORMATION

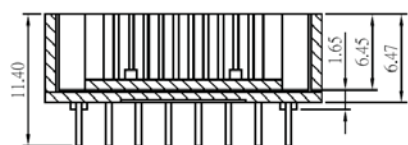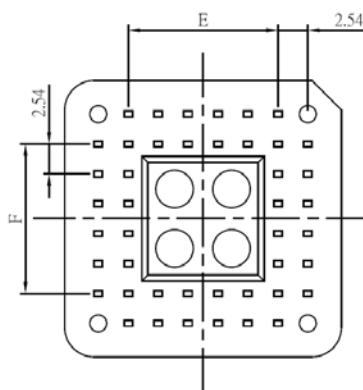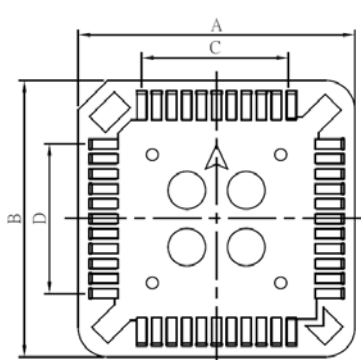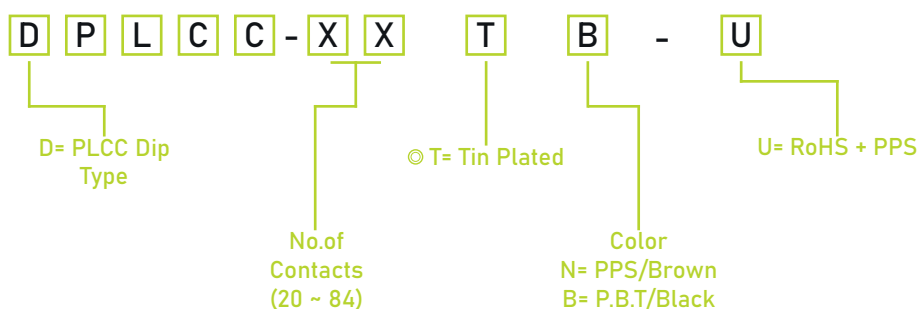

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

No. of Contacts	A ± 0.15	B ± 0.15	C ± 0.1	D ± 0.1	E ± 0.1	F ± 0.1
20 PPS	15.50	15.50	5.08	5.08	5.08	5.08
28 PPS	18.04	18.04	7.62	7.62	7.62	7.62
32 PPS	18.04	20.60	7.62	10.16	7.62	10.16
44 PPS	23.48	23.48	12.70	12.70	12.70	12.70
52 PPS	25.88	25.88	15.24	15.24	15.24	15.24
68 PPS	31.04	31.04	20.32	20.32	20.32	20.32
84 PPS	36.04	36.04	25.40	25.40	25.40	25.40
68 PBT	31.66	31.66	20.32	20.32	20.32	20.32
84 PBT	36.66	36.66	25.40	25.40	25.40	25.40