

SMD PIEZO TRANSDUCER

SMD piezo buzzer 12mm


TOPTTEK®

HARDWARE ELECTRONIC COMPONENTS



SPECIFICATION MODEL: T1225S-HS-05-4.1-13-R

1	Rated Voltage (Vp-p)	5
2	Max Input Voltage (Vp-p)	1 ~ 25
3	Rated Current (mA)	≤ 5
4	Resonance Frequency (KHz)	4.1 ± 0.5
5	Capacitance at 120Hz (pF)	15000 ± 30%
6	Sound Output at 10cm (dB)	≥ 70
7	Operating Temperature (°C)	-20 ~ +70
8	Storage Temperature (°C)	-30 ~ +80
9	Weight (g)	0.5
10	Housing Material	LCP

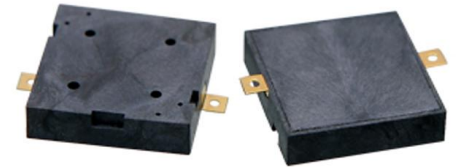

www.toptek-co.com

