





## Board To Board 0.5mm Male H=1.55mm

### Specifications

Current Rate:0.5 AMP  
Insulation Resistance:1000MΩ Min.  
Contact Resistance:30mΩ Max.  
Dielectric Voltage:300V AC for one minute  
Operation Temperature:-40° C to +105 C


### Material

Insulator:Polyester,UL 94V-0  
Standard:LCP  
Terminal:Copper Alloy  
Plating:Gold Plated

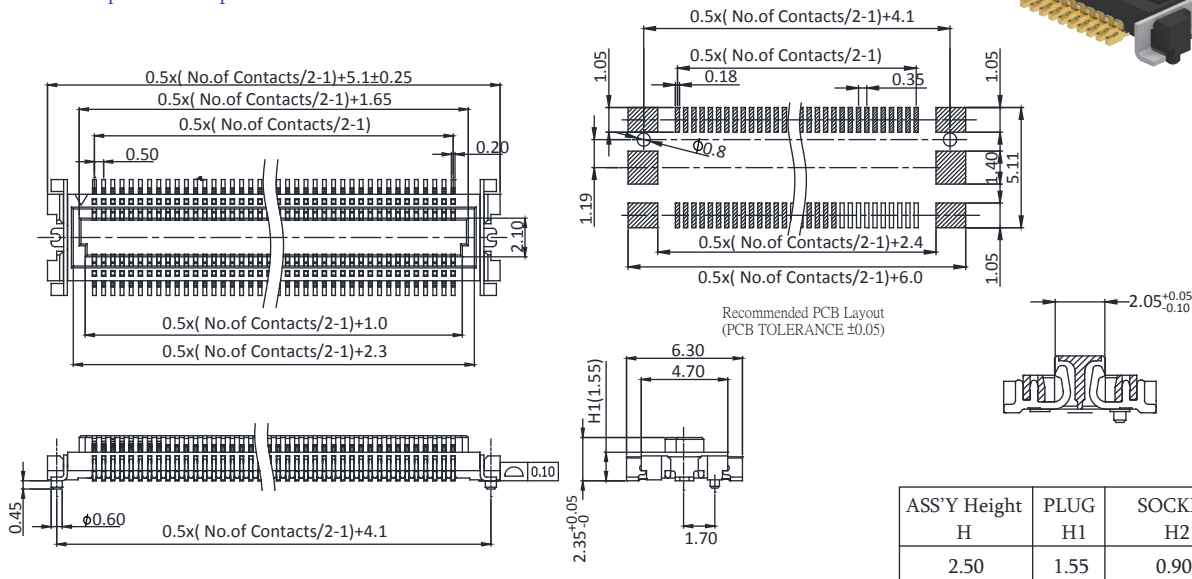

P/N.:5BB051A16M

## Board To Board 0.5mm Female H=0.90mm

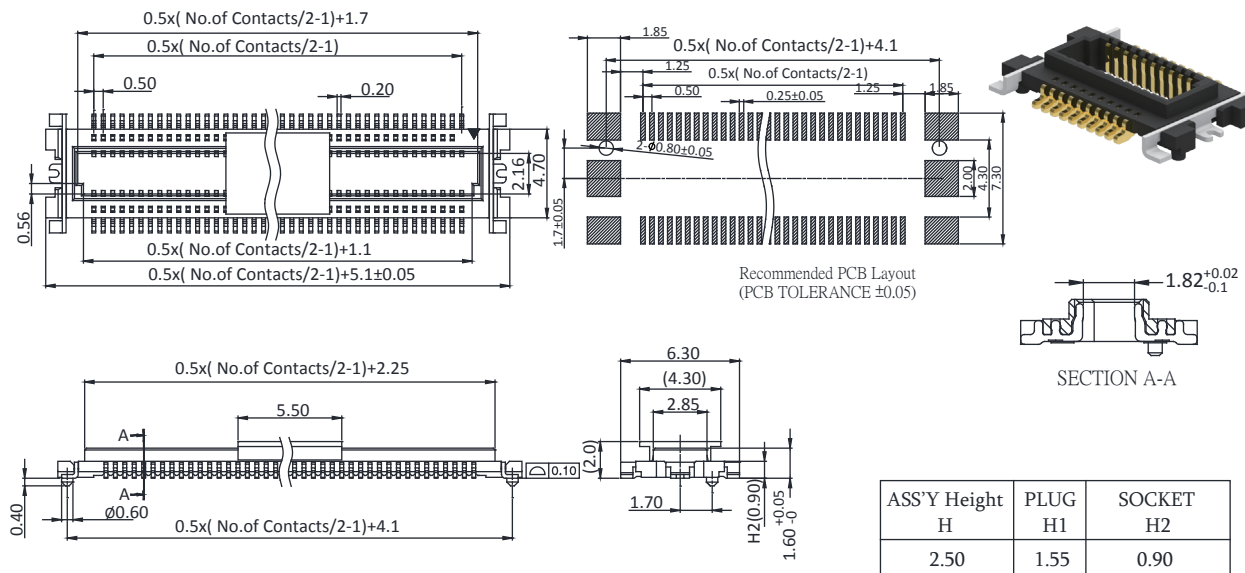

P/N.:5BB051A09F

## ORDER INFORMATION

5 B B 0 5 1 A X X X - X X X X U X - 0 1

05:Pitch 0.5      TYPE

M:Male  
F:Female

Male Height  
16: H=1.55mm  
Female Height  
09: H=0.9mm

No. of Contact  
Male(10,20,60,80)  
Female(20,30,60,80)

U:RoHS + LCP

⊙G0:Gold Flash  
T0:Tin Plated

H:Tape & Reel, W/O Cap  
R:Tape & Reel, With Cap  
(For 5BB051A09F Only)

©:Standard Recommended