

▶ FEMALE HEADER 0.8mm

Female Header 0.8mm 2 Row H=3.1mm SMT Type

TOPTEK®

HARDWARE ELECTRONIC COMPONENTS



Specifications


Current Rate: 1 AMP | Insulation Resistance: 1000MΩ | Max. Contact Resistance: 20mΩ |
Max. Dielectric Voltage: 500V AC for one minute | Operation Temperature: -40°C to +105°C

Material

Insulator: Polyester, UL 94V-0 | Standard: Nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated




www.toptek-co.com







▶ ORDER INFORMATION

P	S	6	M	3	1	-	2	X	X	X	X	X	X	M	U	X
							No. of Pins Pr Row	Insulator Material Option		Post W= With Post N= W/O Post	Contact Plating				Packing	
							2x40	A=BK-PBT B=BK-PA66 C=BK-PA6T D=BK-PA46 F=BK-LCP			G0= Gold Flash G2= 5U" Gold G3= 10U" Gold G4= 15U" Gold G5= 30U" Gold S0= Gold Flash/ Tin SN= Tin				T= Tube P= Tube R= Reel+Cap	

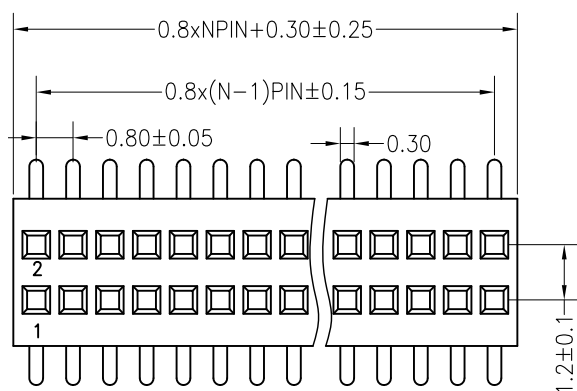

Recommended P.C.B Layout (Top Side)

(PCB BOARD TOLERANCE ± 0.05)

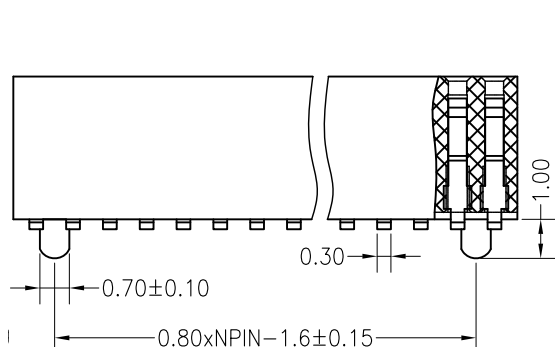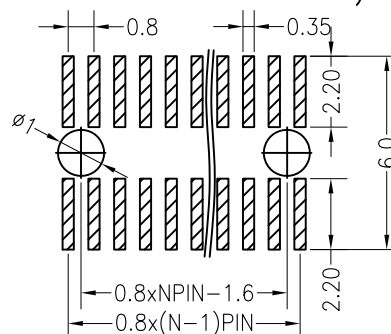

W= With Post

N= W/O Post