






6.35mm Wafer Right Angle / Straight

Specifications

Current Rating: 15A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -25°C to +85°C
Contact Resistance: 3.5mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 5000V AC/minute
Terminal: Brass / Tin Plated
Material: Nylon 66, UL94-V0 or V2




No. of Contacts	Dimensions		
	A	B	C
2	6.35	13.97	21.08
4	19.05	26.67	33.78
6	31.75	39.37	46.48
8	44.45	52.07	59.18
10	57.15	64.77	71.88

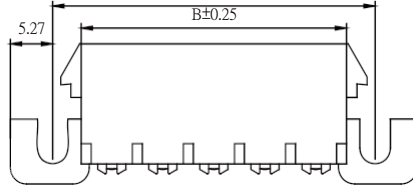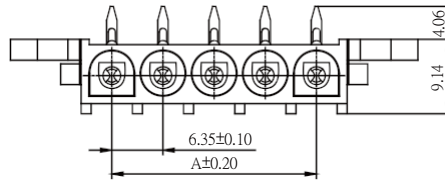



Male

Female

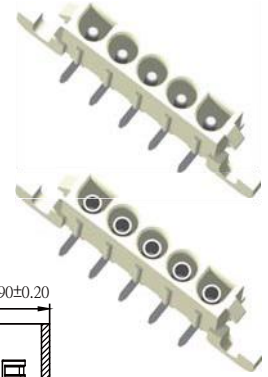


Part No.: 6350R-1XXTW-L
M: Male
F: Female

Housing Wafer Terminal




No. of Contacts	Dimensions	
	A	B
2	6.35	13.97
3	12.70	20.32
4	19.05	26.67
5	25.40	33.02
6	31.75	39.37
8	44.45	52.07


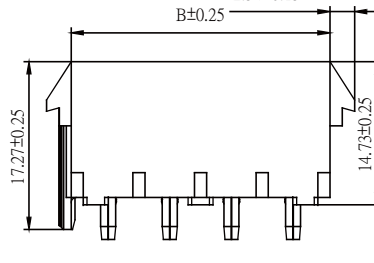


Female


Male



Part No.: 6350S-1XXTW-L
M: Male
F: Female
1: With Peg
2: W/O Peg




No. of Contacts	Dimensions	
	A	B
3x2	6.35	13.97
3x3	12.70	20.32
3x4	19.05	26.67
3x5	25.40	33.02

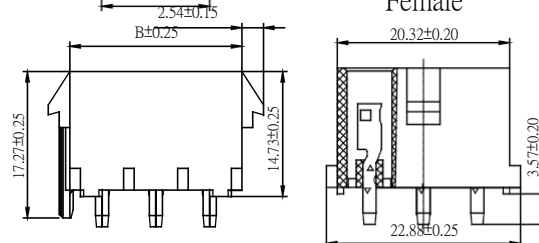

Female

Male



Part No.: 6350S-3XXTW-L
M: Male
F: Female
1: With Peg
2: W/O Peg