

PIN HEADER 1.0mm

Pin Header 1.0mm 1 Row H=1.0/1.5mm Stack Straight Type

TOPTTEK[®]

HARDWARE ELECTRONIC COMPONENTS



www.toptek-co.com




Specifications



Current Rate: 1 AMP | Insulation Resistance: 1000MΩ | Max. Contact Resistance: 20mΩ |
Max. Dielectric Voltage: 500V AC for one minute | Operation Temperature: -40°C to +105°C

Material


Insulator: Polyester, UL 94V-0 | Standard: Nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated



ORDER INFORMATION

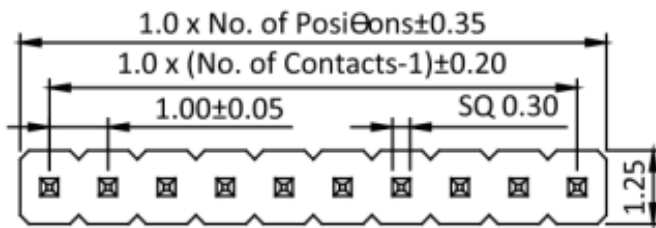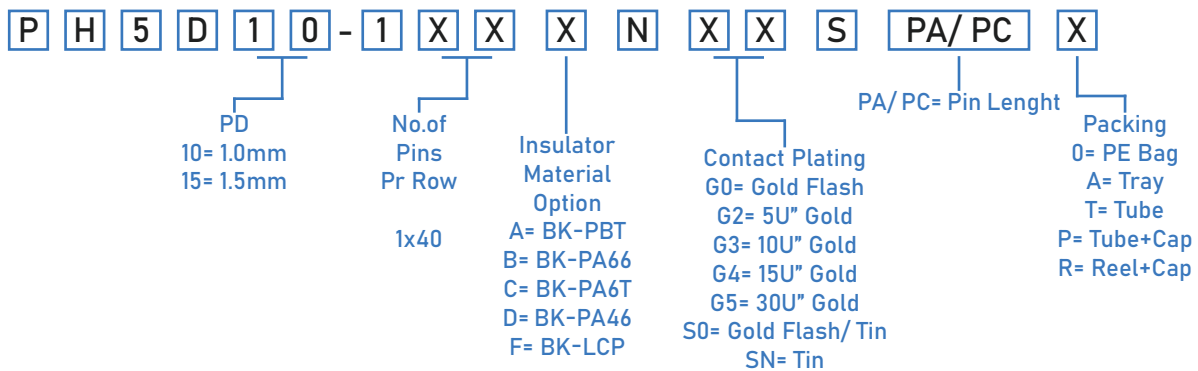

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

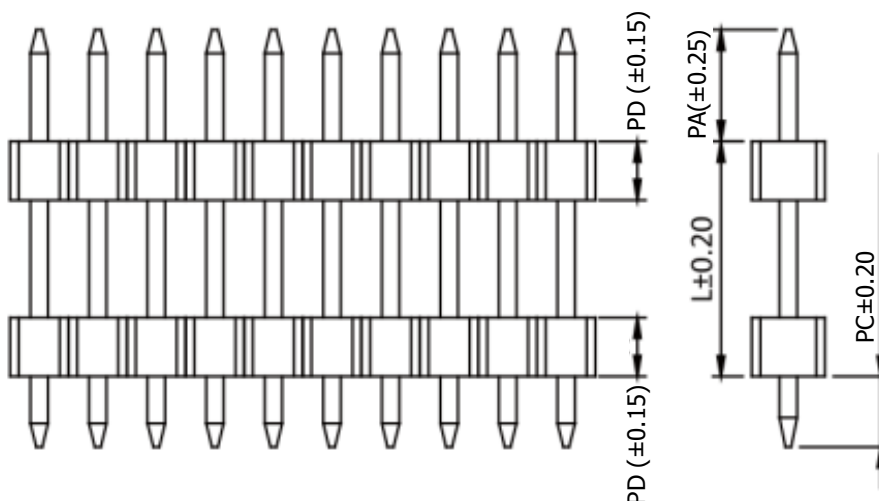

PD
1.00mm
1.50mm

ITEM	PA	PC
Standard	1.90	1.20

Alternate