

MACHINE PIN HEADER




Specifications


Current Rate: 1 AMP | Insulation Resistance: $\geq 1000\text{M}\Omega$ at $V=100\text{V}$ | Contact Resistance: $\leq 4\text{m}\Omega/\text{Contact}$ | Dielectric Voltage: 1000V AC for one minute | Operation Temperature: -40°C to $+105^\circ\text{C}$

Material

Insulator: Polyester, UL 94V-0 | © Standard: PPS | Terminal: Copper Alloy | Plated: Gold Plated

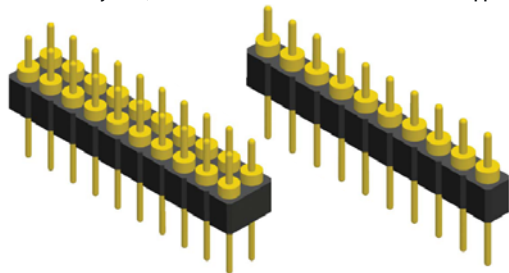

ORDER INFORMATION

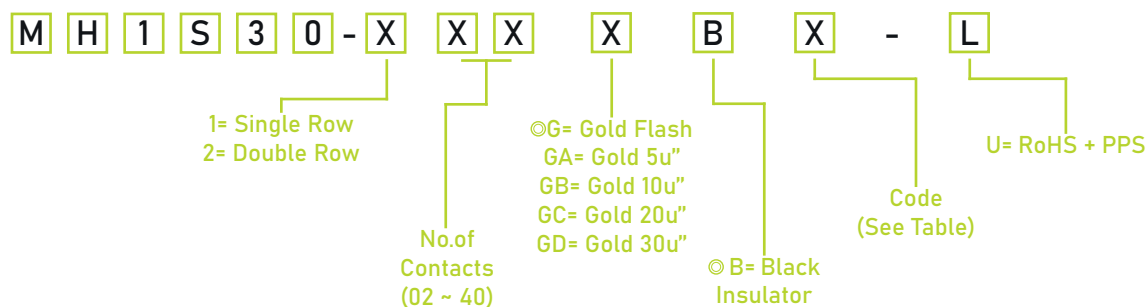

Code	Dim. A	Dim. B	Dim. C	Dim. D	Dim. E	Dim. L
1240	6.20	3.20	0.47	0.67	1.18	12.40
1370	6.57	4.13	0.60	0.50	1.35	13.70
1460	8.40	3.20	0.47	0.67	1.18	14.60
2150	15.30	3.20	0.47	0.67	1.18	21.50
2740	21.20	3.20	0.47	0.67	1.18	27.40
3360	27.40	3.20	0.47	0.67	1.18	33.60

