


Audio-Video Combo Jack Series

TOPTEK®

HARDWARE ELECTRONIC MANUFACTURER




www.toptek-co.com

TOPTEK srl
10015 - IVREA (TO) - ITALY
tel. +39 0125 251 211 - fax +39 0341 367 607
info@toptek-co.com

Contact Resistance: $\leq 0.03 \Omega$
 Insulation Resistance: $\geq 100M \Omega$
 Withstand Voltage: 500V, AC/minute
 Temperature Range: $-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$


Insertion and Extraction Force: 3N ~ 30N (RCA Jack)
 Insertion and Extraction Force: 4N ~ 40N (DIN (Jack))
 Terminal Strength: $\geq 20\text{N}$
 Rated Load: 30V DC 0.3A Life: ≥ 5000 Cycles

R-DIN-101

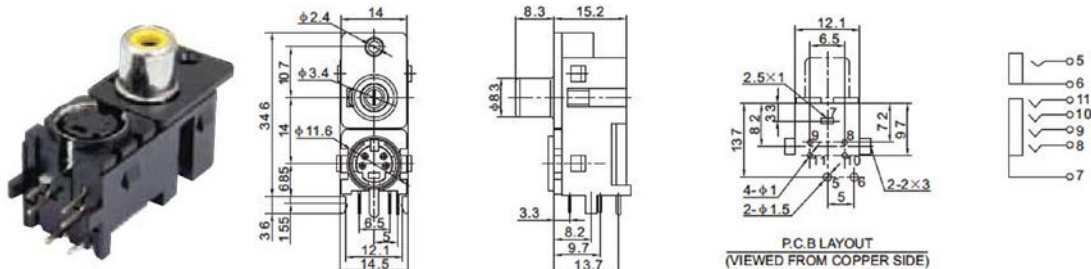


7
*
47


R-DIN-101A

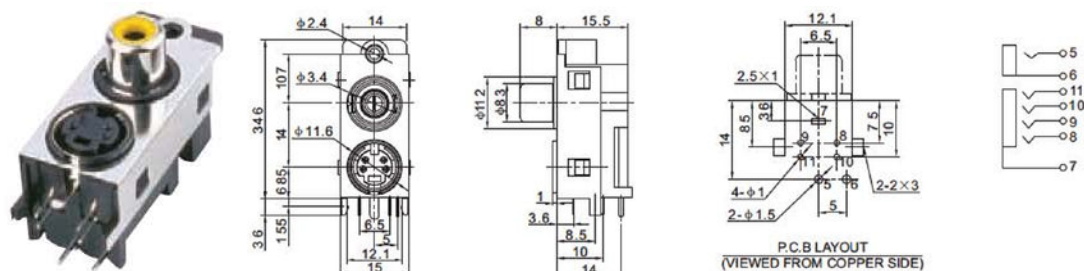

R-DIN-101C

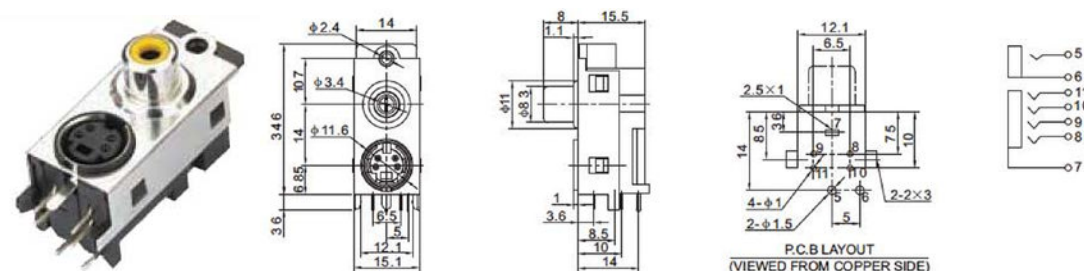

R-DIN-101D

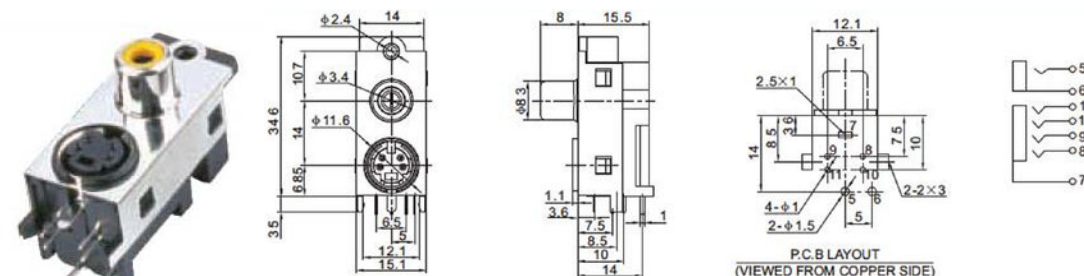

CONNECTOR MANUFACTURERS





TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com





Contact Resistance: $\leq 0.03 \Omega$
Insulation Resistance: $\geq 100M \Omega$
Withstand Voltage: 500V, AC/minute
Temperature Range: $-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$

Insertion and Extraction Force: 3N ~ 30N (RCA Jack)
Insertion and Extraction Force: 4N ~ 40N (DIN (Jack))
Terminal Strength: $\geq 20\text{N}$
Rated Load: 30V DC 0.3A
Life: ≥ 5000 Cycles




R-DIN-102A







R-DIN-103A



R-DIN-104




R-DIN-104K



Contact Resistance: $\leq 0.03 \Omega$
 Insulation Resistance: $\geq 100M \Omega$
 Withstand Voltage: 500V, AC/minute
 Temperature Range: $-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$


Insertion and Extraction Force: 3N ~ 30N (RCA Jack)
 Insertion and Extraction Force: 4N ~ 40N (DIN (Jack))
 Terminal Strength: $\geq 20\text{N}$
 Rated Load: 30V DC 0.3A Life: ≥ 5000 Cycles

R-DIN-105A

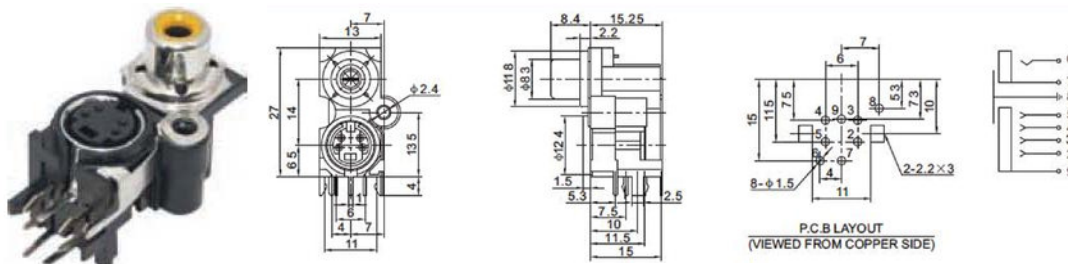


7
*
49


R-DIN-105K

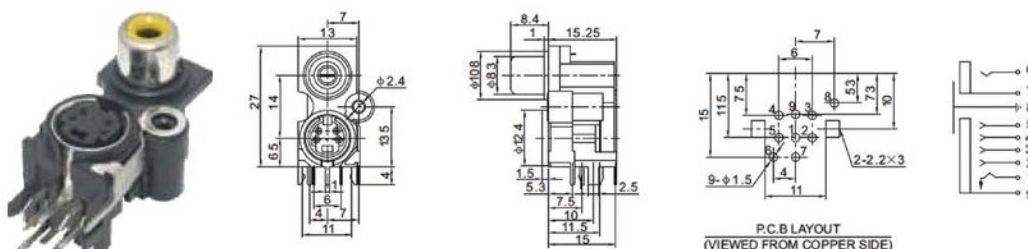

R-DIN-105KA











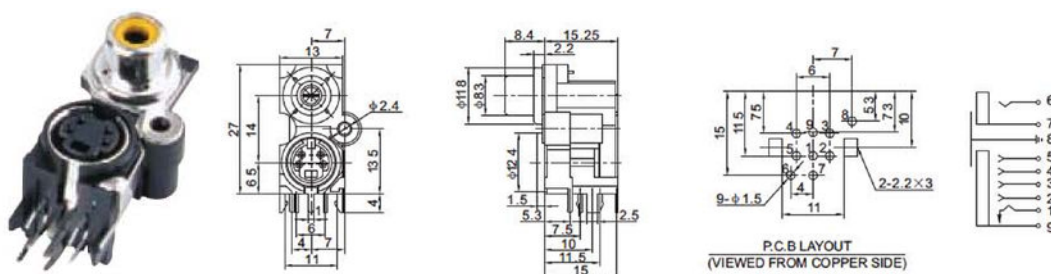


R-DIN-106K

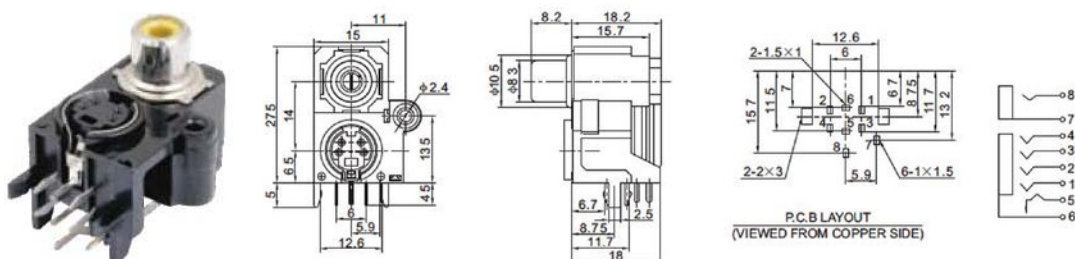

 www.toptek-co.com


Insertion and Extraction Force: 3N ~ 30N (RCA Jack)
Insertion and Extraction Force: 4N ~ 40N (DIN (Jack))
Terminal Strength: $\geq 20\text{N}$
Rated Load: 30V DC 0.3A Life: ≥ 5000 Cycles

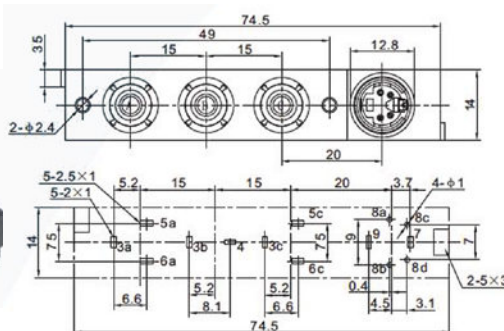


Life: ≥ 5000 Cycles

 www.toptek-co.com


7
*
51




P.C.B LAYOUT
(VIEWED FROM COPPER SIDE)



P.C.B LAYOUT
(VIEWED FROM COPPER SIDE)













P.C.B LAYOUT
(VIEWED FROM COPPER SIDE)



TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER




Insertion and Extraction Force: 3N ~ 30N (RCA Jack)
Insertion and Extraction Force: 4N ~ 40N (DIN (Jack)
Terminal Strength: ≥ 20N
Rated Load: 30V DC 0.3A Life: ≥ 5000 Cycles

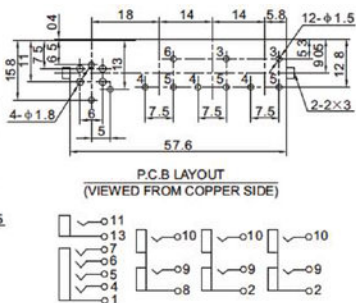

Insertion and Extraction Force: 3N ~ 30N (RCA Jack)
Insertion and Extraction Force: 4N ~ 40N (DIN (Jack))
Terminal Strength: $\geq 20\text{N}$
Rated Load: 30V DC 0.3A Life: ≥ 5000 Cycles

 www.toptek-co.com

7
*
53

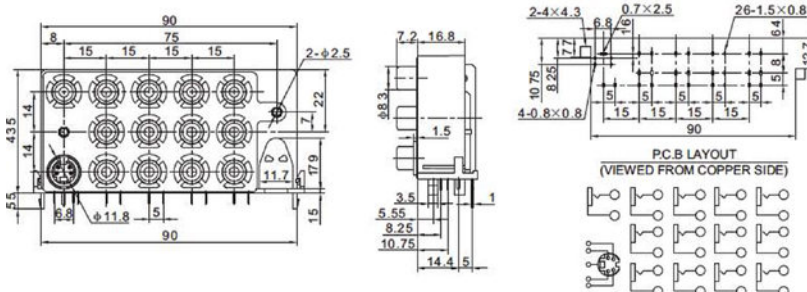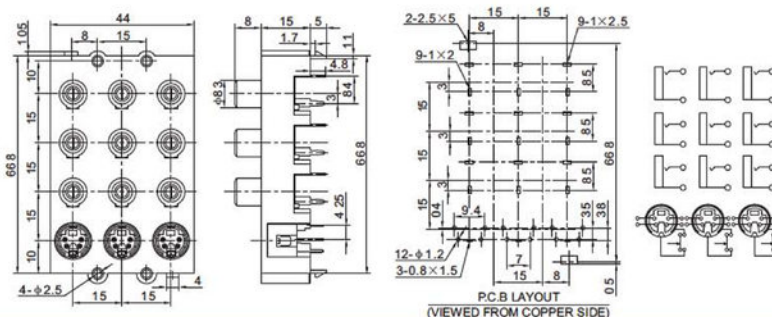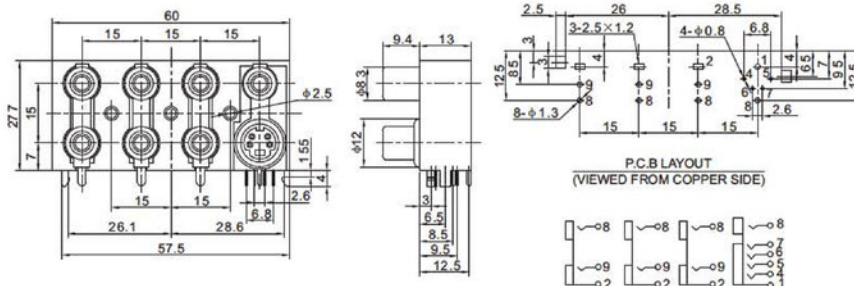

CONNECTOR MANUFACTURERS

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER




www.toptek-co.com


Contact Resistance: $\leq 0.05 \Omega$
Insulation Resistance: $\geq 100M \Omega$
Withstand Voltage: 500V, AC/minute
Temperature Range: $-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$

Insertion and Extraction Force: 5N ~ 30N (RCA Jack)
Insertion and Extraction Force: 11N ~ 88N (CS (Jack)
Rated Load: 40V AC, 0.5A (RCA Jack)
Rated Load: 250V AC, 3A (CS (Jack) Life: ≥ 5000 Cycles


R-CS-01

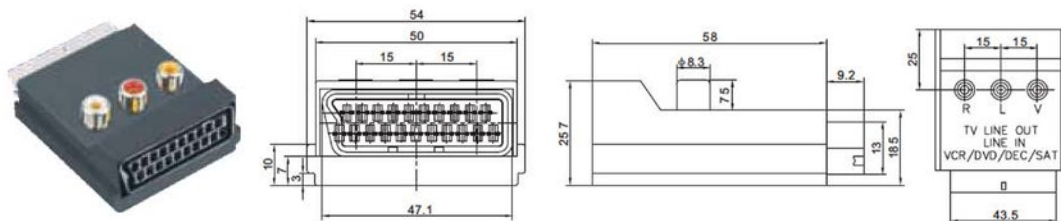


R-CS-02

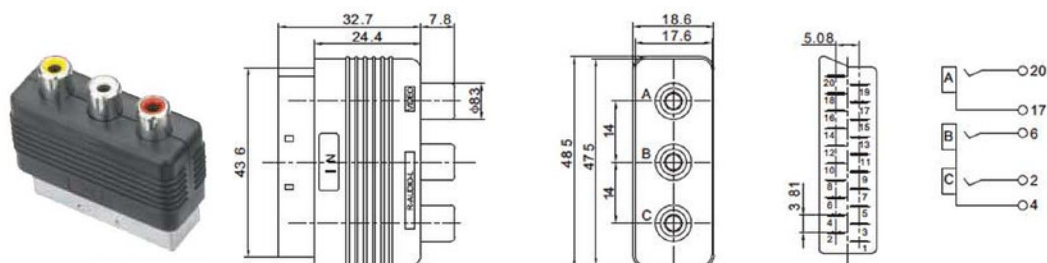

R-CS-03

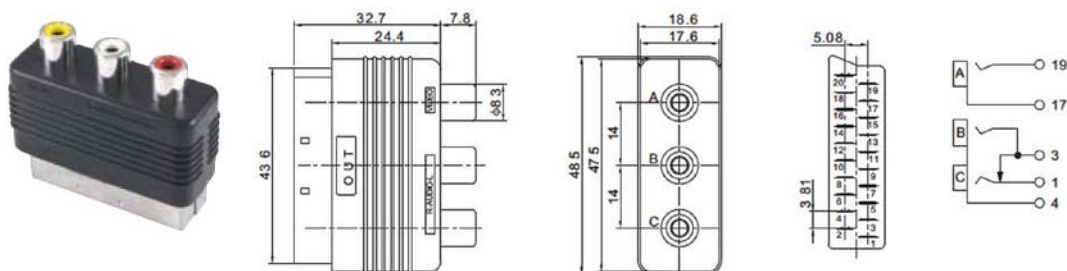


R-CS-03A

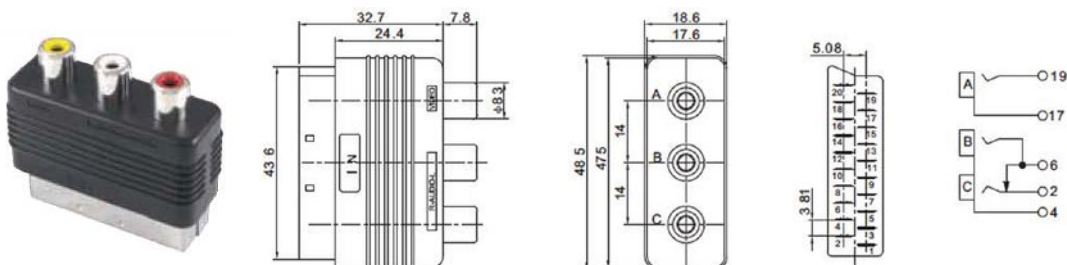

Contact Resistance: $\leq 0.05 \Omega$
 Insulation Resistance: $\geq 100M \Omega$
 Withstand Voltage: 500V, AC/minute
 Temperature Range: $-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$


Insertion and Extraction Force: 5N ~ 30N (RCA Jack)
 Insertion and Extraction Force: 11N ~ 88N (CS Jack)
 Rated Load: 40V AC, 0.5A (RCA Jack)
 Rated Load: 250V AC, 3A (CS Jack) Life: ≥ 5000 Cycles

R-CS-04

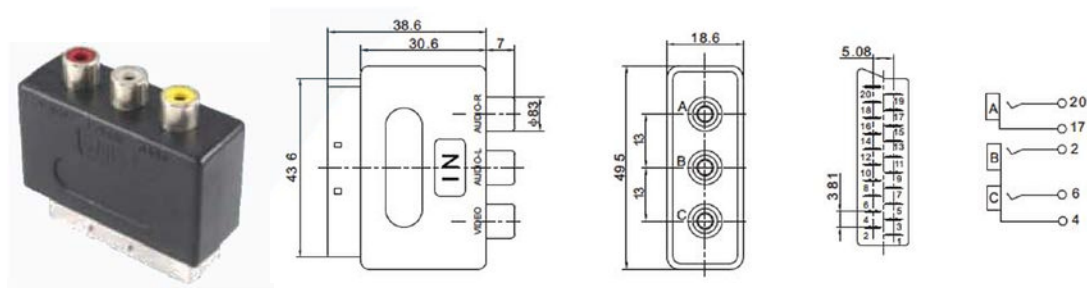

7
*
55

R-CS-04A

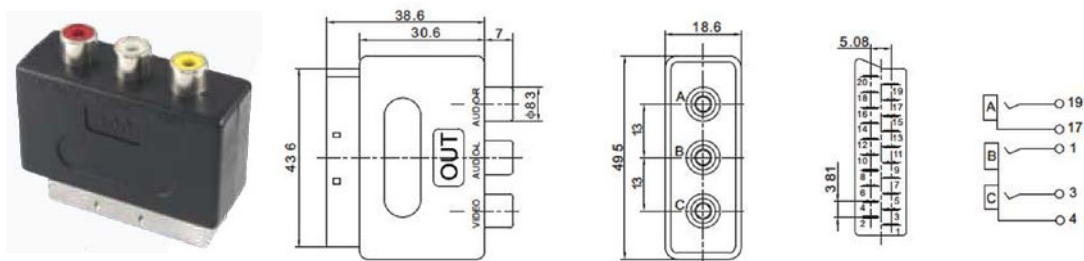

R-CS-05

