

Rocker Switch

TOPTEK®

HARDWARE ELECTRONIC MANUFACTURER



www.toptek-co.com

TOPTEK srl
10015 - IVREA (TO) - ITALY
tel. +39 0125 251 211 - fax +39 0341 367 607
info@toptek-co.com

Rating: 10A 125VAC ; 6A 250VAC
Contact Resistance: 35m Ω max
Insulation Resistance: 500VDC 100M Ω min


Dielectric Strength: 1500VAC, 1 Minute
Operating Temperature: -25°C~ +85°C
Electrical Life: $\geq$ 10,000 Cycles

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER




www.toptek-co.com

A-TOP1-101

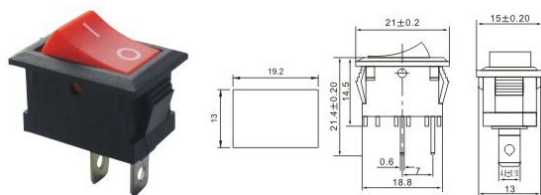


A-TOP1-101 ON-OFF

A-TOP1-1-101

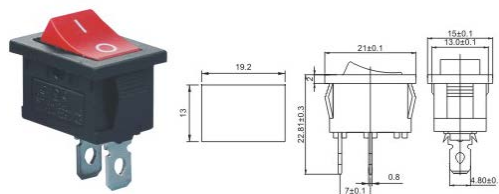


A-TOP1-1-101 ON-OFF

A-TOP1-102

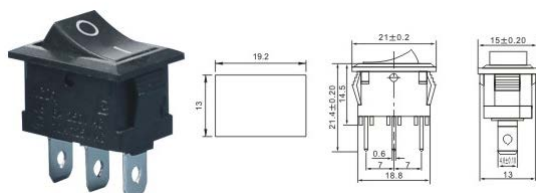


A-TOP1-102 ON-ON

A-TOP1-1-102

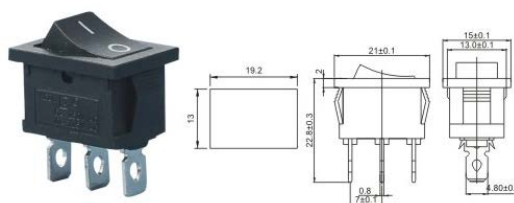


A-TOP1-1-102 ON-ON

A-TOP1-2-101 / 111

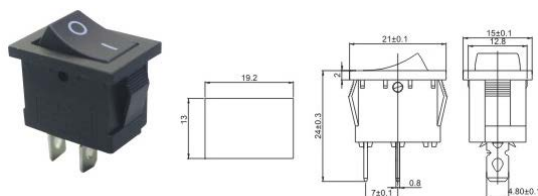


A-TOP1-2-101 ON-OFF
A-TOP1-2-111 OFF-(ON)

A-TOP1-2-101N

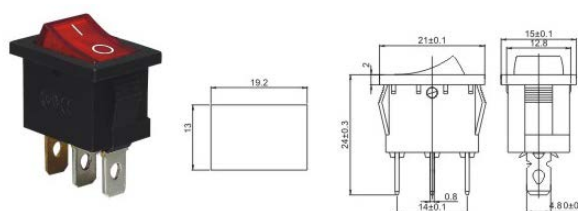


A-TOP1-2-101N ON-OFF

A-TOP1-3-101EN

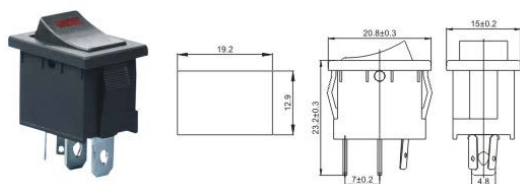

A-TOP1-3-101EN ON-OFF (3V LED)

A-TOP1-4-201

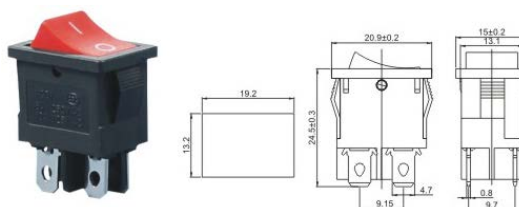

A-TOP1-4-201 ON-OFF

CONNECTOR MANUFACTURERS


TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER

 www.toptek-co.com

Rating: 10A 125VAC ; 6A 250VAC
Contact Resistance: 35m Ω max
Insulation Resistance: 500VDC 100M Ω min


Dielectric Strength: 1500VAC, 1 Minute
Operating Temperature: -25°C~ +85°C
Electrical Life: $\geq$ 10,000 Cycles

A-TOP1-2-103 / 113 / 123

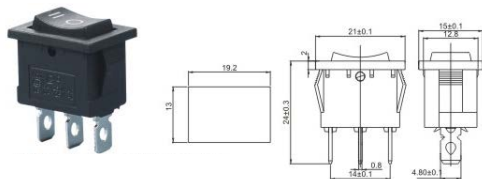


A-TOP1-2-103 ON-OFF-ON
A-TOP1-2-113 ON-OFF-(ON)
A-TOP1-2-123 (ON)-OFF-(ON)

A-TOP1-4-201N

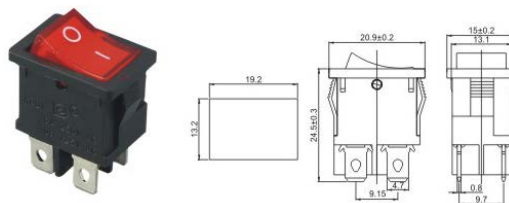


A-TOP1-4-201N-X ON-OFF

A-TOP1-2-101W

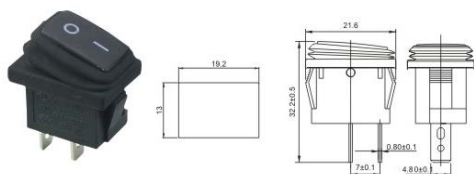


A-TOP1-2-101W ON-OFF

A-TOP1-4-201W / 201NW

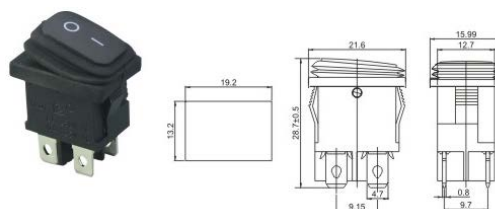


A-TOP1-4-201W ON-OFF
A-TOP1-4-201NW ON-OFF

A-TOP1-2-102W / 103W

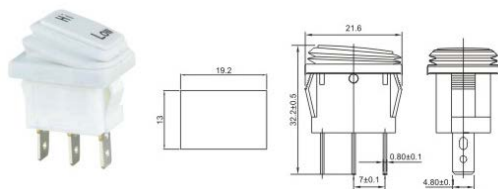


A-TOP1-2-102W ON-ON
A-TOP1-2-103W ON-OFF-ON

A-TOP1-1-202 / 203

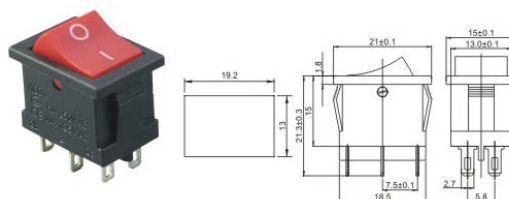


A-TOP1-1-202 ON-ON
A-TOP1-1-203 ON-OFF-ON

A-TOP1-2-101NW

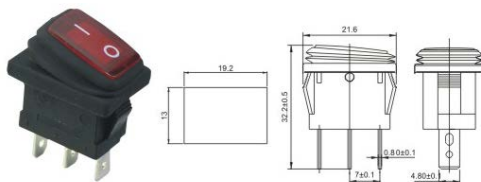

A-TOP1-2-101NW ON-OFF

A-TOP1-01

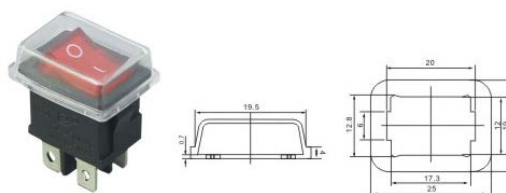

A-TOP1-01


Rating: 10A 125VAC ; 6A 250VAC
Contact Resistance: 35m Ω max
Insulation Resistance: 500VDC 100M Ω min

Dielectric Strength: 1500VAC, 1 Minute
Operating Temperature: -25°C ~ +85°C
Electrical Life: $\geq$ 10,000 Cycles

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER




A-TOP1-5-101/111

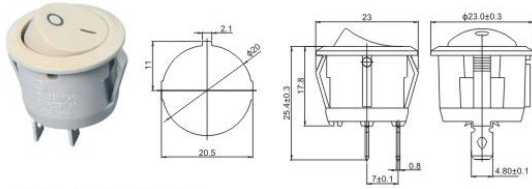


A-TOP1-5-101 ON-OFF
A-TOP1-5-111 OFF-(ON)

A-TOP1-5-101W

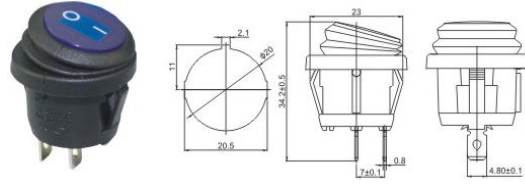


A-TOP1-5-101W ON-OFF

A-TOP1-5-102

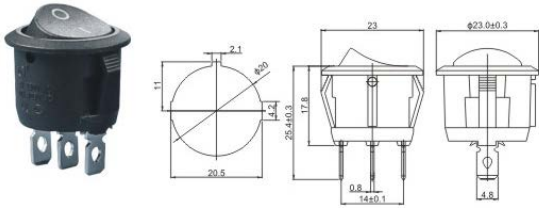


A-TOP1-5-102 ON-ON

A-TOP1-5-102W/103W

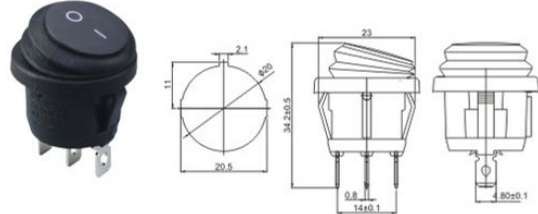


A-TOP1-5-102W ON-ON
A-TOP1-5-103W ON-OFF-ON

A-TOP1-5-103 / 113 / 123

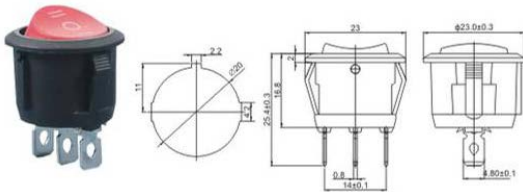


A-TOP1-5-103 ON-OFF-ON
A-TOP1-5-113 ON-OFF-(ON)
A-TOP1-5-123 (ON)-OFF-(ON)

A-TOP1-5-101NW

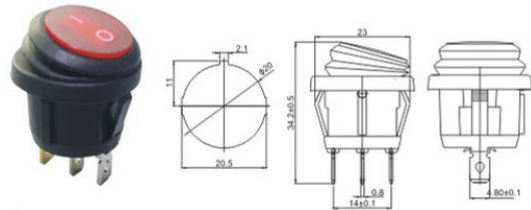


A-TOP1-5-101NW ON-OFF

A-TOP1-5-101N

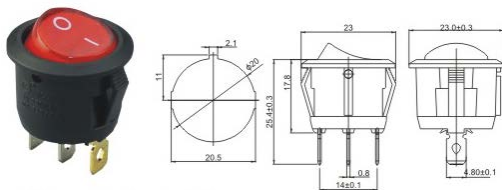

A-TOP1-5-101N ON-OFF

A-TOP1-7-101Y / 101NY

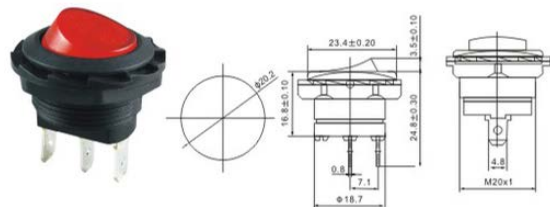

A-TOP1-7-101Y ON-OFF 2P
A-TOP1-7-101NY ON-OFF 3P

CONNECTOR MANUFACTURERS


Rating: 10A 125VAC ; 6A 250VAC
Contact Resistance: 35m Ω max
Insulation Resistance: 500VDC 100M Ω min

Dielectric Strength: 1500VAC, 1 Minute
Operating Temperature: -25°C~ +85°C
Electrical Life: $\geq$ 10,000 Cycles

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER


 www.toptek-co.com

A-TOP1-5-101 EN

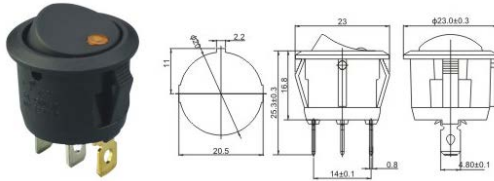


A-TOP1-5-101EN ON-OFF

A-TOP1-8-101

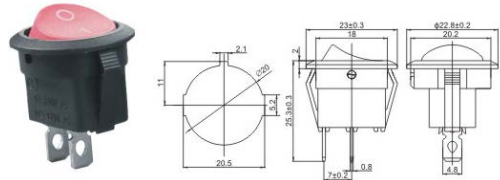


A-TOP1-8-101 ON-OFF

A-TOP1-5-101H/102H/103H/101NH

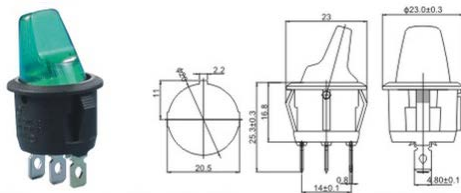


A-TOP1-5-101H ON-OFF
A-TOP1-5-102H ON-ON
A-TOP1-5-103H ON-OFF-ON
A-TOP1-5-101NH ON-OFF

A-TOP1-8-102 / 103

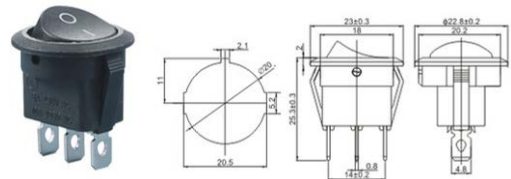

A-TOP1-8-102 ON-ON
A-TOP1-8-103 ON-OFF-ON

A-TOP1-8-101N

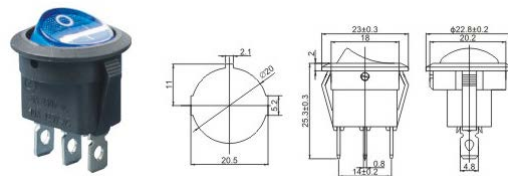


A-TOP1-8-101N ON-OFF

A-TOP1-02




A-TOP1-02

A-TOP1-8-101EN

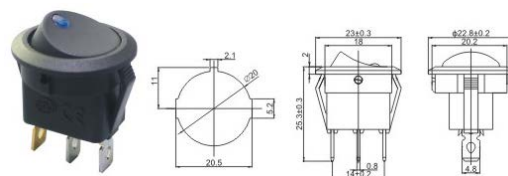

A-TOP1-8-101EN ON-OFF

A-TOP1-6-201

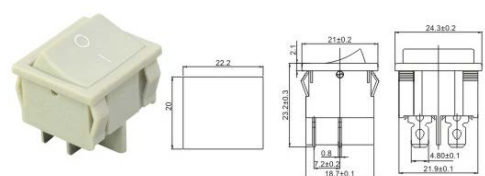

A-TOP1-6-201 ON-OFF


Rating: 10A 125VAC ; 6A 250VAC
Contact Resistance: 35m Ω max
Insulation Resistance: 500VDC 100M Ω min

Dielectric Strength: 1500VAC, 1 Minute
Operating Temperature: -25°C~ +85°C
Electrical Life: $\geq$ 10,000 Cycles

TOPTEK
HARDWARE ELECTRONIC MANUFACTURER




A-TOP1-8-101W

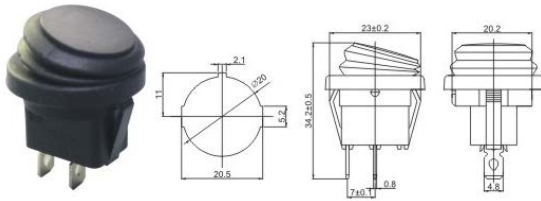


A-TOP1-8-101W ON-OFF

A-TOP1-6-201N

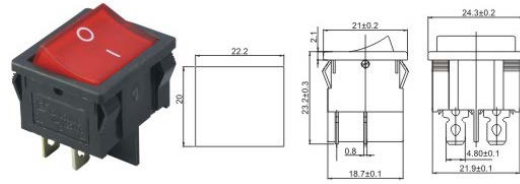


A-TOP1-6-201N ON-OFF With Light

A-TOP1-8-102W/103W

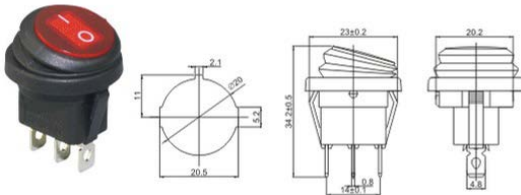


A-TOP1-8-102W ON-ON
A-TOP1-8-103W ON-OFF-ON

A-TOP1-6-202/202N/203

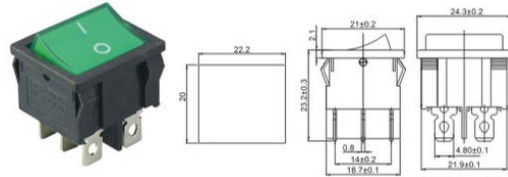


A-TOP1-6-202 ON-ON
A-TOP1-6-202N ON-ON
A-TOP1-6-203 ON-OFF-ON

A-TOP1-8-101NW

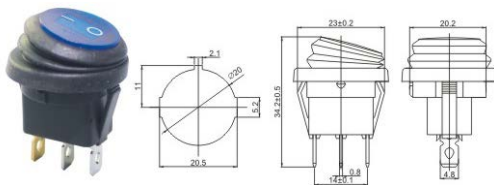


A-TOP1-8-101NW ON-OFF

A-TOP1-6-2101/2101N/2102

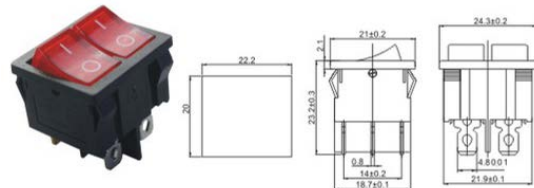


A-TOP1-6-2101 ON-OFF
A-TOP1-6-2101N ON-OFF
A-TOP1-6-2102 ON-ON

A-TOP1-8-201/201N

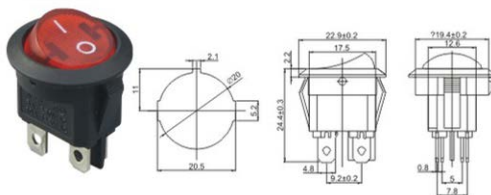

A-TOP1-8-201 ON-OFF
A-TOP1-8-201N ON-OFF With Light

A-TOP1-15

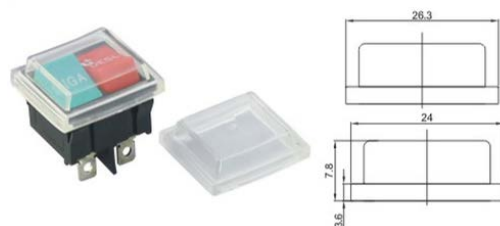

A-TOP1-15

CONNECTOR MANUFACTURERS


Rating: 10A 125VAC ; 6A 250VAC
Contact Resistance: 35m Ω max
Insulation Resistance: 500VDC 100M Ω min

Dielectric Strength: 1500VAC, 1 Minute
Operating Temperature: -25°C ~ +85°C
Electrical Life: $\geq$ 10,000 Cycles

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER




A-TOP1-9-101

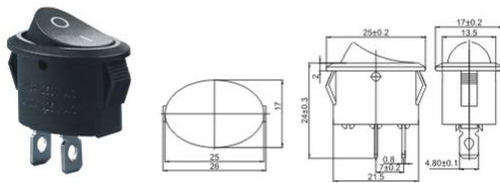


A-TOP1-9-101 ON-OFF

A-TOP1-12-101

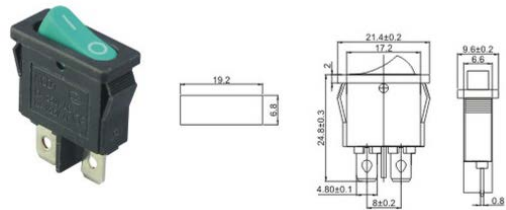


A-TOP1-12-101 ON-OFF

A-TOP1-9-102/103

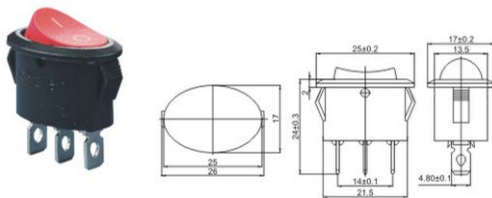


A-TOP1-9-102 ON-ON
A-TOP1-9-103 ON-OFF-ON

A-TOP1-14

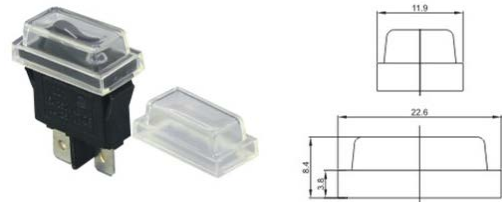


A-TOP1-14

A-TOP1-9-101N

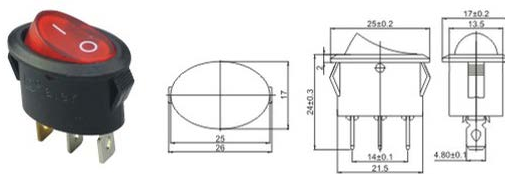

A-TOP1-9-101N ON-OFF

A-TOP1-13-102

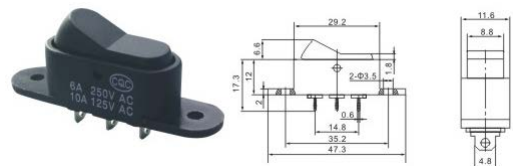


A-TOP1-13-102 ON-ON

A-TOP1-13



A-TOP1-13

A-TOP1-122-1

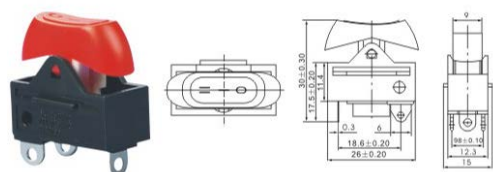

A-TOP1-122-1 OFF-ON-ON


Rating A-TOP1: 10A 125VAC; 6A 250VAC / A-TOP3: 20A 125VAC; 15A 250VAC
 Contact Resistance: 35m Ω max
 Insulation Resistance: 500VDC 100M Ω min

Dielectric Strength: 1500VAC, 1 Minute
 Operating Temperature: -25°C~ +85°C
 Electrical Life: $\geq$ 10,000 Cycles

TOPTEK®
 HARDWARE ELECTRONIC MANUFACTURER




A-TOP1-10-101/102

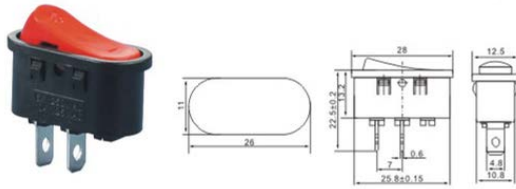


A-TOP1-10-101 ON-OFF
 A-TOP1-10-102 ON-ON

A-TOP1-5-202/203

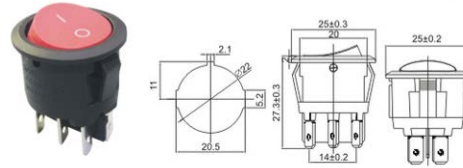


A-TOP1-5-202 ON-ON
 A-TOP1-5-203 ON-OFF-ON

A-TOP1-11-101/103

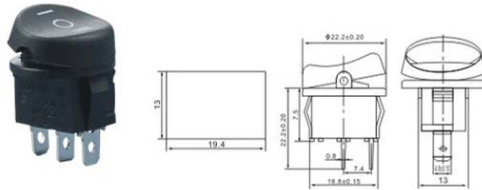


A-TOP1-11-101 ON-OFF
 A-TOP1-11-103 ON-OFF-ON

A-TOP1-7-101

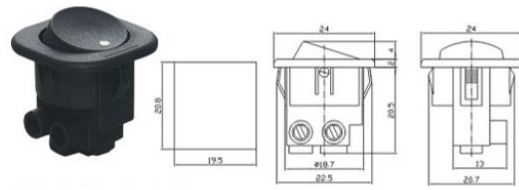


A-TOP1-7-101 ON-OFF

A-TOP3-101/111

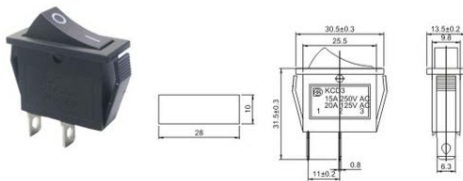


A-TOP3-101 ON-OFF
 A-TOP3-111 OFF-(ON)

A-TOP3-103

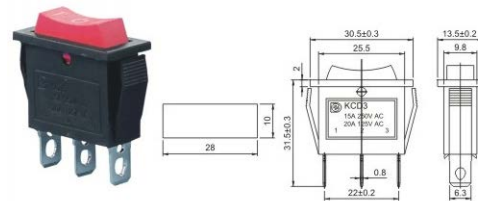


A-TOP3-103 ON-OFF-ON

A-TOP3-102

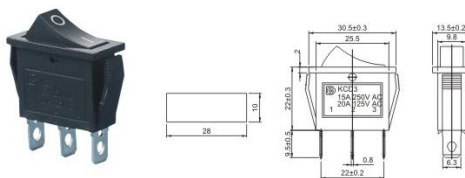

A-TOP3-102 ON-ON

A-TOP3-101N

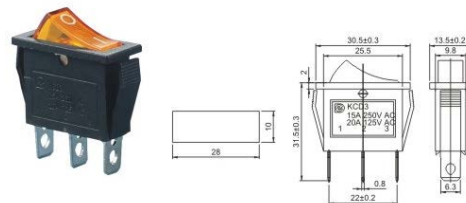

A-TOP3-101N ON-OFF

CONNECTOR MANUFACTURERS


TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com

Rating: 20A 125VAC ; 15A 250VAC
Contact Resistance: 35m Ω max
Insulation Resistance: 500VDC 100M Ω min


Dielectric Strength: 1500VAC, 1 Minute
Operating Temperature: -25°C~ +85°C
Electrical Life: $\geq$ 10,000 Cycles

A-TOP3-101EN

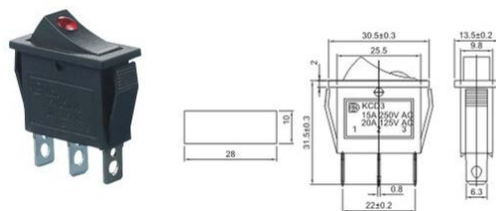


A-TOP3-101EN ON-OFF

A-TOP3-2-102V

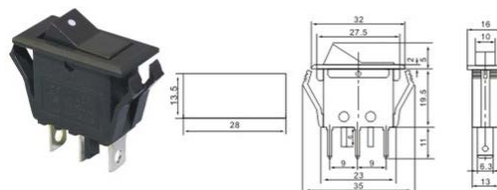


A-TOP3-2-102V ON-ON

A-TOP3-03

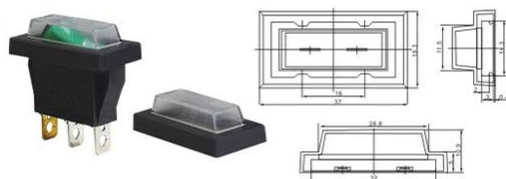


A-TOP3-03

A-TOP3-2-101NV

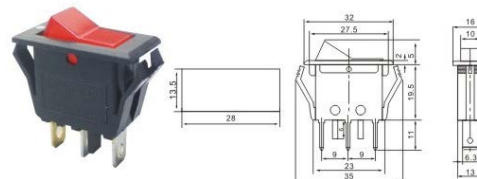


A-TOP3-2-101NV ON-OFF

A-TOP3-101W

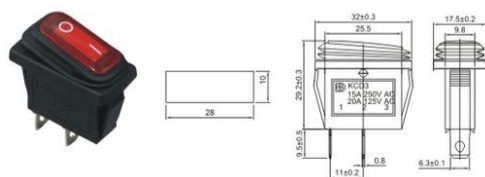


A-TOP3-101W ON-OFF

A-TOP3-2-101C/102C/101NC

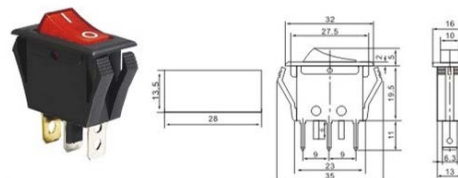


A-TOP3-2-101C ON-OFF
A-TOP3-2-102C ON-ON
A-TOP3-2-101NC ON-OFF

A-TOP3-102W/103W

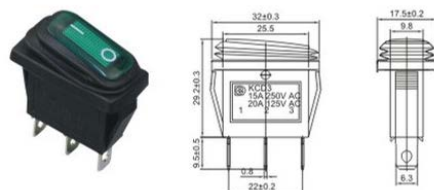

A-TOP3-102W ON-ON
A-TOP3-103W ON-OFF-ON

A-TOP3-03 Panel

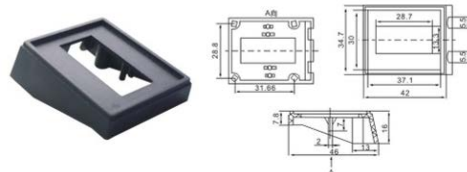

A-TOP3-03 Panel


Rating: 20A 125VAC ; 15A 250VAC
Contact Resistance: 35m Ω max
Insulation Resistance: 500VDC 100M Ω min

Dielectric Strength: 1500VAC, 1 Minute
Operating Temperature: -25°C ~ +85°C
Electrical Life: $\geq$ 10,000 Cycles

TOPTEK
HARDWARE ELECTRONIC MANUFACTURER




A-TOP3-101NW

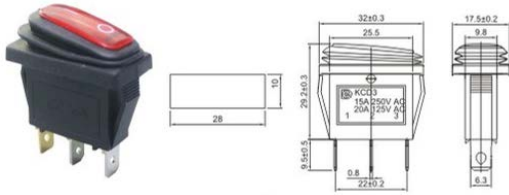


A-TOP3-101NW ON-OFF

A-TOP3-3-101N

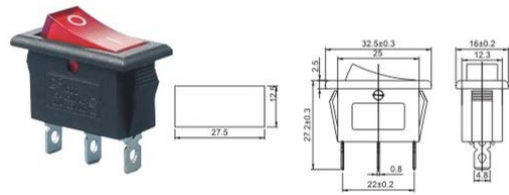


A-TOP3-3-101N ON-OFF

A-TOP3-2-101V

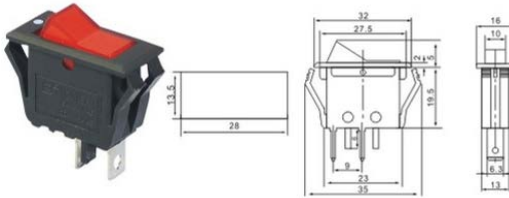


A-TOP3-2-101V ON-OFF

A-TOP3-4-101

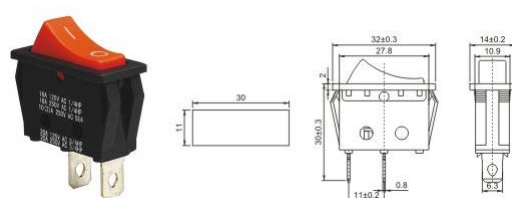


A-TOP3-4-101 ON-OFF

A-TOP3-4-103/123

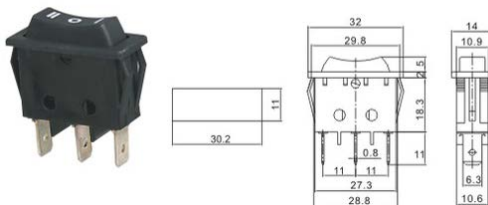


A-TOP3-4-103 ON-OFF-ON
A-TOP3-4-123 (ON)-OFF-(ON)

A-TOP3-11-201EN

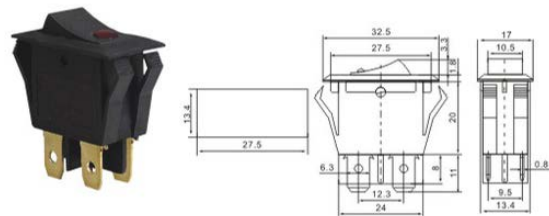


A-TOP3-11-201EN ON-OFF

A-TOP3-4-101N

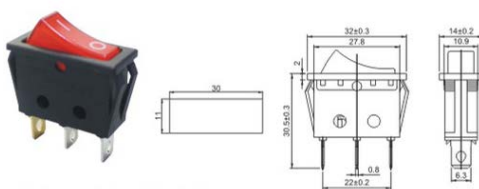

A-TOP3-4-101N ON-OFF

A-TOP3-12-101N

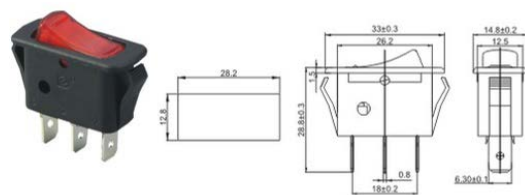

A-TOP3-12-101N ON-OFF

CONNECTOR MANUFACTURERS


Rating: 20A 125VAC ; 15A 250VAC
Contact Resistance: 35m Ω max
Insulation Resistance: 500VDC 100M Ω min

Dielectric Strength: 1500VAC, 1 Minute
Operating Temperature: -25°C ~ +85°C
Electrical Life: $\geq$ 10,000 Cycles

TOPTek®
HARDWARE ELECTRONIC MANUFACTURER


 www.toptek-co.com

A-TOP3-4-101EN

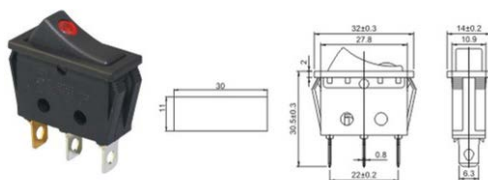


A-TOP3-4-101EN ON-OFF

A-TOP3-18-101N

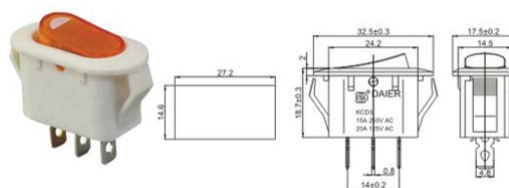


A-TOP3-18-101N ON-OFF

A-TOP3-5-101N

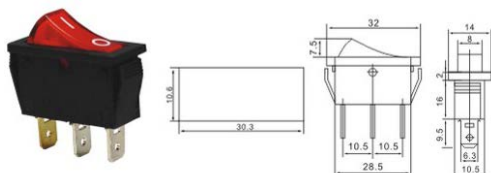


A-TOP3-5-101N ON-OFF

A-TOP3-14-201N

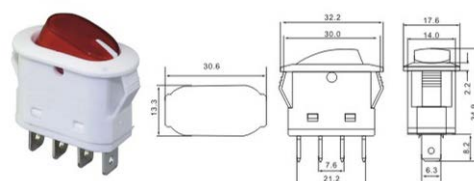


A-TOP3-14-201N ON-OFF

A-TOP3-6-101

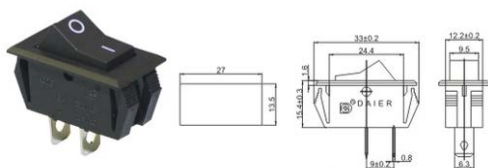


A-TOP3-6-101 ON-OFF

A-TOP3-14P-201N

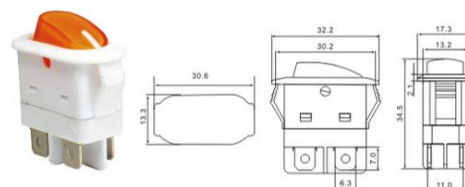


A-TOP3-14P-201N ON-OFF

A-TOP3-8-101/102

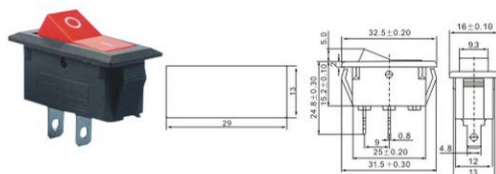

A-TOP3-8-101 ON-OFF
A-TOP3-8-102 ON-ON

A-TOP3-17-101EN

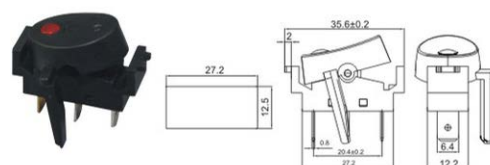

A-TOP3-17-101EN ON-OFF

Rating: 20A 125VAC ; 16A 250VAC
Contact Resistance: 35m Ω max
Insulation Resistance: 500VDC 100M Ω min


Dielectric Strength: 1500VAC, 1 Minute
Operating Temperature: -25°C ~ +85°C
Electrical Life: $\geq$ 10,000 Cycles

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER




www.toptek-co.com

A-TOP2-201/211

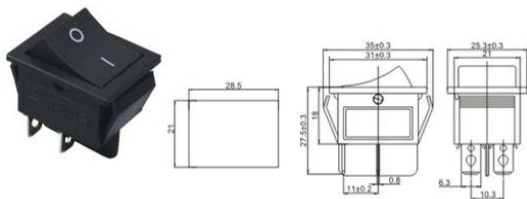


A-TOP2-201 ON-OFF
A-TOP2-211 OFF-(ON)

A-TOP2-202/212

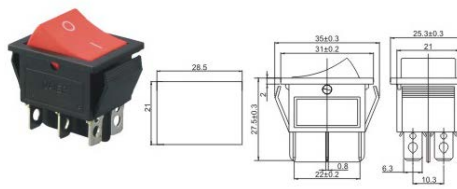


A-TOP2-202 ON-ON
A-TOP2-212 ON-(ON)

A-TOP2-201N

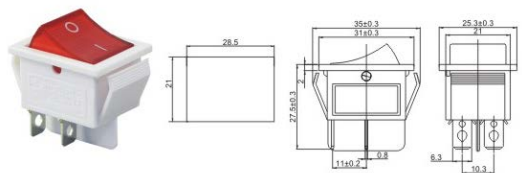


A-TOP2-201N ON-OFF

A-TOP2-202N

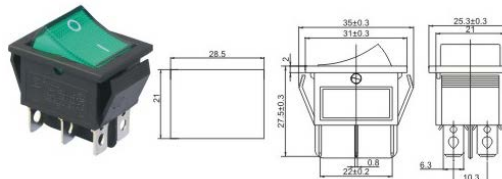


A-TOP2-202N ON-ON

A-TOP2-203/213/223

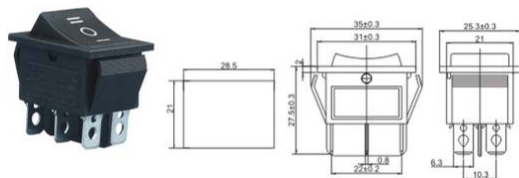


A-TOP2-203 ON-OFF-ON
A-TOP2-213 ON-OFF-(ON)
A-TOP2-223 (ON)-OFF-(ON)

A-TOP2-202W/202NW/203W/203NW

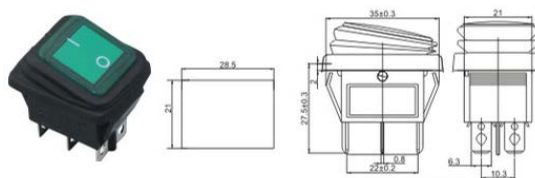


A-TOP2-202W ON-ON
A-TOP2-202NW ON-ON
A-TOP2-203W ON-OFF-ON
A-TOP2-203NW ON-OFF-ON

A-TOP2-203N

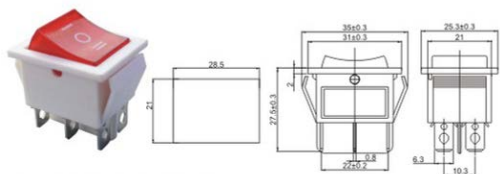

A-TOP2-203N ON-OFF

A-TOP2-201/211

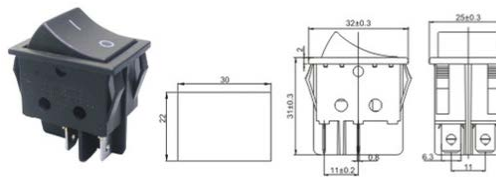

A-TOP2-2-201 ON-OFF W/o Light
A-TOP2-2-211 OFF-(ON)



CONNECTOR MANUFACTURERS


TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER

 www.toptek-co.com

Rating: 20A 125VAC ; 16A 250VAC
Contact Resistance: 35m Ω max
Insulation Resistance: 500VDC 100M Ω min


Dielectric Strength: 1500VAC, 1 Minute
Operating Temperature: -25°C~ +85°C
Electrical Life: $\geq$ 10,000 Cycles

A-TOP2-2101/2101N

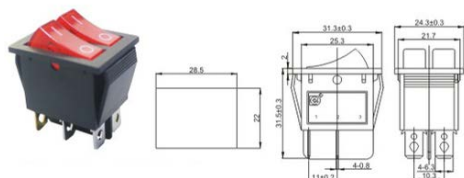


A-TOP2-2101 ON-OFF 4P
A-TOP2-2101N ON-OFF 6P

A-TOP2-201N

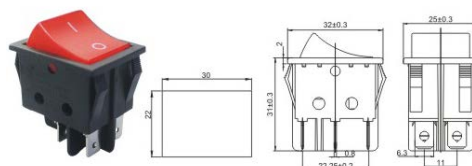


A-TOP2-201N ON-OFF W/o Light

A-TOP2-2101EN

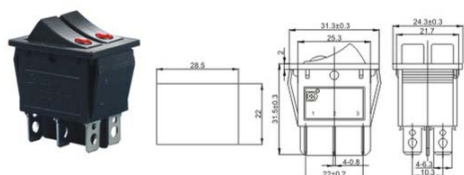


A-TOP2-2101EN ON-OFF

A-TOP2-2-201EN

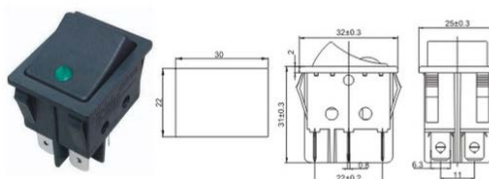


A-TOP2-2-201EN ON-OFF

A-TOP2-04

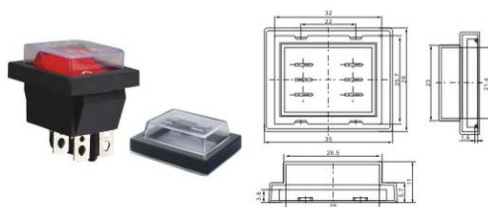


A-TOP2-04

A-TOP2-2-202/202N

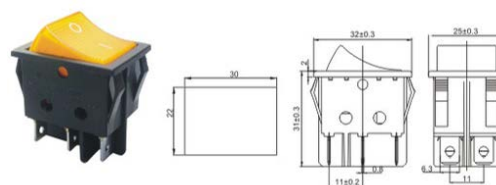


A-TOP2-2-202 ON-ON
A-TOP2-2-202N ON-ON

A-TOP2-201W/201NW

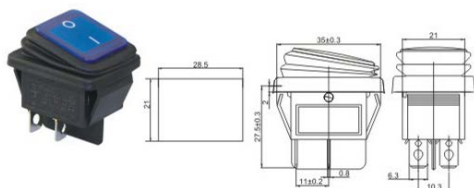

A-TOP2-201W ON-OFF
A-TOP2-201NW ON-OFF

A-TOP2-2-201NS

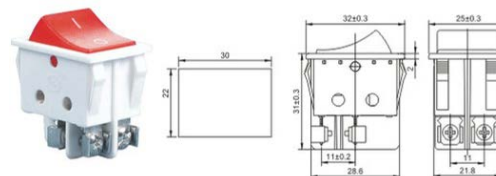

A-TOP2-2-201NS ON-OFF

Rating: 20A 125VAC ; 16A 250VAC
Contact Resistance: 35m Ω max
Insulation Resistance: 500VDC 100M Ω min


Dielectric Strength: 1500VAC, 1 Minute
Operating Temperature: -25°C~ +85°C
Electrical Life: $\geq$ 10,000 Cycles

TOPTEK[®]

HARDWARE ELECTRONIC MANUFACTURER


www.toptek-co.com

A-TOP2-2-201W/201NW

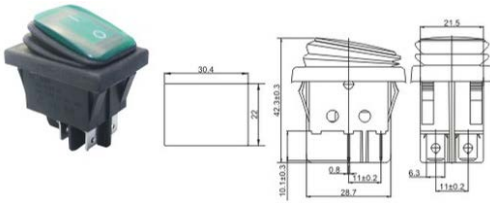


A-TOP2-2-201W ON-OFF
A-TOP2-2-201NW ON-OFF

A-TOP2-5-2101/2101N

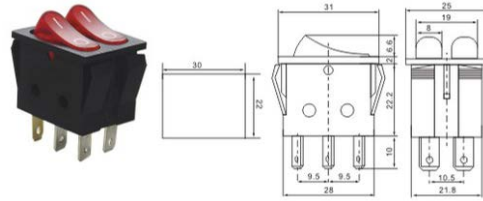


A-TOP2-5-2101 ON-OFF 4P
A-TOP2-5-2101N ON-OFF 6P

A-TOP2-2-202W/202NW

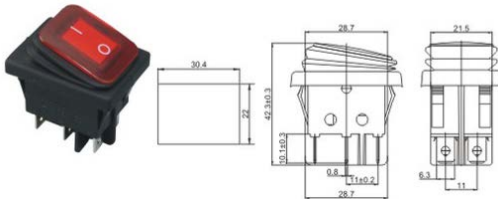


A-TOP2-2-202W ON-ON
A-TOP2-2-202NW ON-ON

A-TOP2-04B

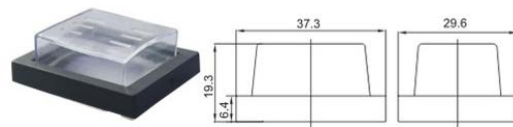


A-TOP2-04B

A-TOP2-2-201P

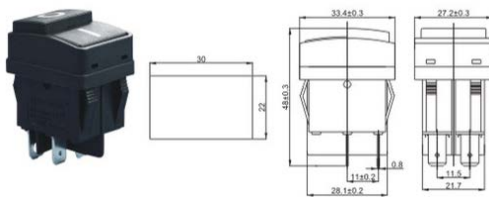


A-TOP2-2-201P ON-OFF

A-TOP2-3101/3101N/2-3101N

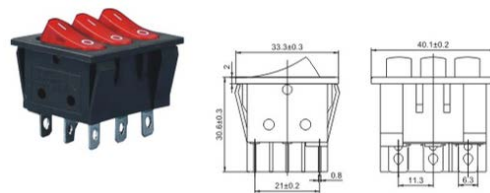


A-TOP2-3101 ON-OFF 6P
A-TOP2-3101N ON-OFF 9P
A-TOP2-2-3101N ON-OFF 8P White Color

A-TOP2-3-201/211/202/212/203/223

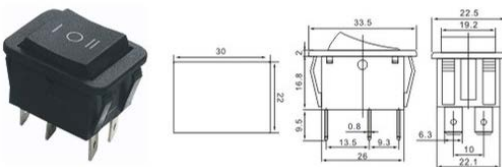

A-TOP2-3-201 ON-OFF
A-TOP2-3-211 OFF-(ON)
A-TOP2-3-202 ON-ON
A-TOP2-3-212 ON-(ON)
A-TOP2-3-203 ON-OFF-ON
A-TOP2-3-223 (ON)-OFF-(ON)

A-TOP2-3-3101N

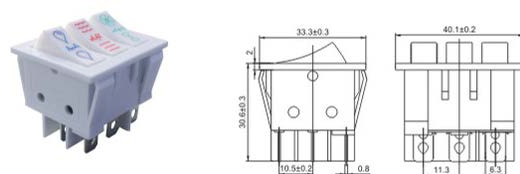

A-TOP2-3-3101N ON-OFF 8P

CONNECTOR MANUFACTURERS


TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER

 www.toptek-co.com

Rating: 20A 125VAC ; 16A 250VAC
Contact Resistance: 35m Ω max
Insulation Resistance: 500VDC 100M Ω min


Dielectric Strength: 1500VAC, 1 Minute
Operating Temperature: -25°C~ +85°C
Electrical Life: $\geq$ 10,000 Cycles

A-TOP2-4-2101/2101N

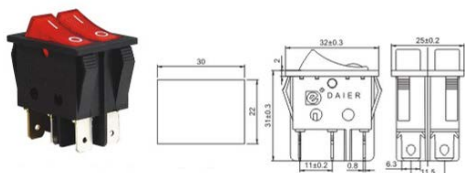


A-TOP2-4-2101 ON-OFF 4P
A-TOP2-4-2101N ON-OFF 6P

A-TOP2-10-201/201N

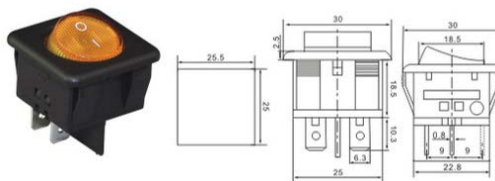


A-TOP2-10-201 ON-OFF
A-TOP2-10-201 ON-OFF

A-TOP2-4-2101EN

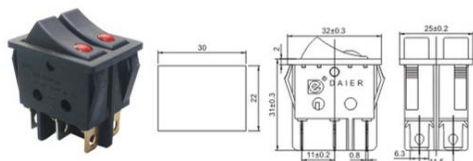

A-TOP2-4-2101EN ON-OFF

A-TOP2-06/06N

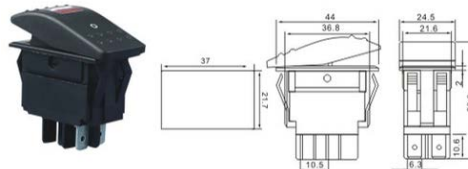

A-TOP2-06 ON-OFF
A-TOP2-06N ON-OFF

14
*
22

Rocker Switch

Pb

RoHS


Rating: 6A 125VAC ; 3A 250VAC
Contact Resistance: 35m Ω max
Insulation Resistance: 500VDC 100M Ω min

Dielectric Strength: 1500VAC, 1 Minute
Operating Temperature: -25°C~ +85°C
Electrical Life: $\geq$ 10,000 Cycles

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER


www.toptek-co.com

A-TOP5-101

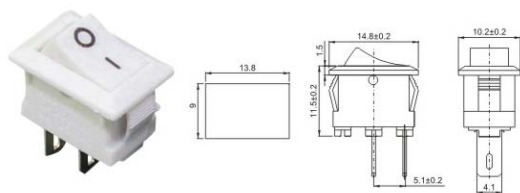


A-TOP5-101 ON-OFF

A-TOP5-103

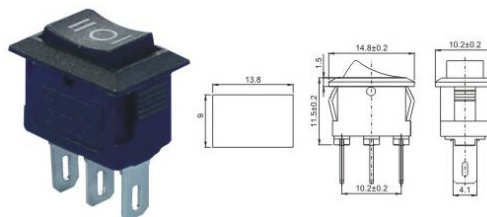


A-TOP5-103 ON-OFF-ON

A-TOP5-102

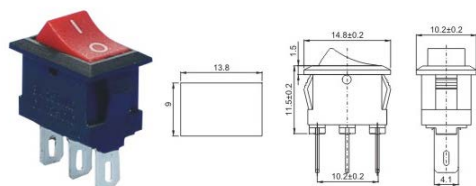


A-TOP5-102 ON-ON

A-TOP5-101L / 102L

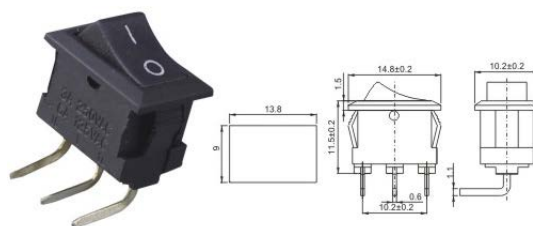


A-TOP5-101 L ON-OFF 2P
A-TOP5-102 L ON-ON 3P

A-TOP5-1510

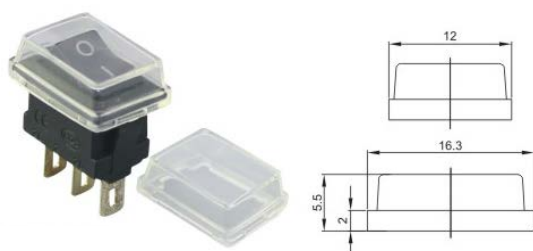


A-TOP5-1510

A-TOP5-2-102

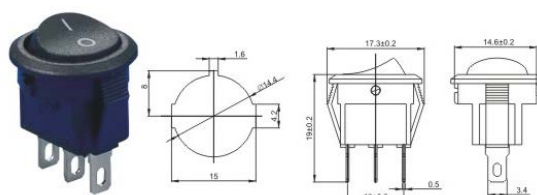


A-TOP5-2-102 ON-ON

A-TOP5-2-101

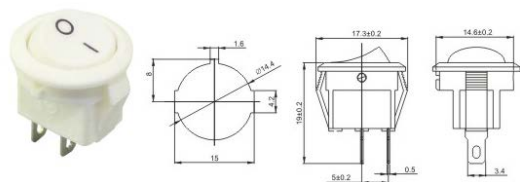

A-TOP5-2-101 ON-OFF

A-TOP5-2-101N

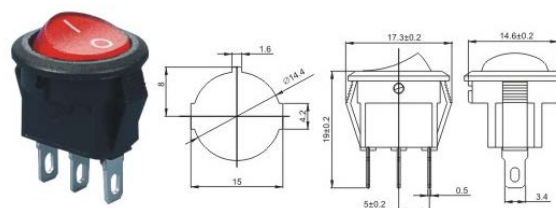

A-TOP5-2-101N ON-OFF

CONNECTOR MANUFACTURERS

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com


Rating: 6A 125VAC ; 3A 250VAC
Contact Resistance: 35m Ω max
Insulation Resistance: 500VDC 100M Ω min

Dielectric Strength: 1500VAC, 1 Minute
Operating Temperature: -25°C~ +85°C
Electrical Life: $\geq$ 10,000 Cycles


A-TOP5-16




A-TOP5-8S.304

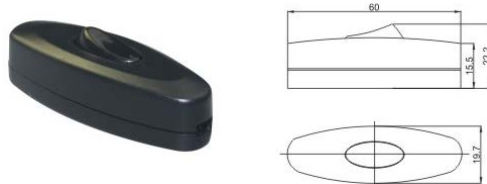

A-TOP5-3-101

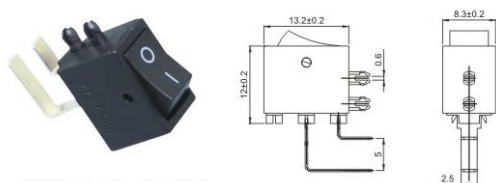


A-TOP5-305

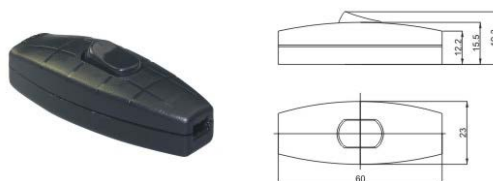


A-TOP5-3-101 ON-OFF

A-TOP5-303-1 SPST / 2 DPST

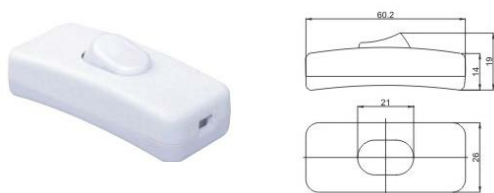


A-TOP5-322

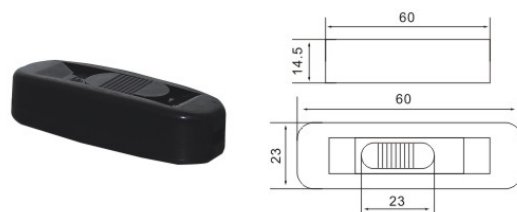

A-TOP5-303-1 SPST
A-TOP5-303-2 DPST

A-TOP5-304

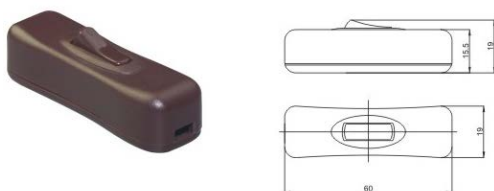

A-TOP5-307

