

CONNECTOR MANUFACTURERS


Rating: 10A 125VAC ; 6A 250VAC
 Contact Resistance: 35m Ω max
 Insulation Resistance: 500VDC 100M Ω min

Dielectric Strength: 1500VAC, 1 Minute
 Operating Temperature: -25°C~ +85°C
 Electrical Life: ≥ 10,000 Cycles

TOPTEK[®]
 HARDWARE ELECTRONIC MANUFACTURER


www.toptek-co.com

A-TOP1-2-103 / 113 / 123

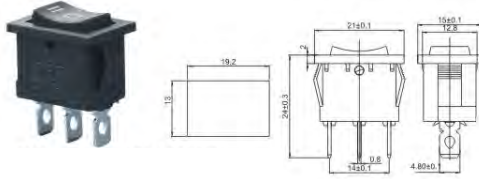


A-TOP1-2-103 ON-OFF-ON
 A-TOP1-2-113 ON-OFF-(ON)
 A-TOP1-2-123 (ON)-OFF-(ON)

A-TOP1-4-201N

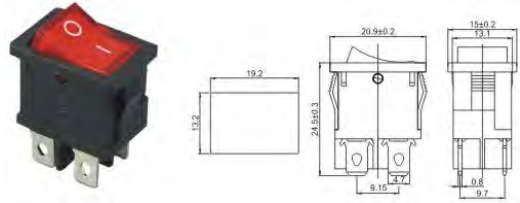


A-TOP1-4-201N-X ON-OFF

A-TOP1-2-101W

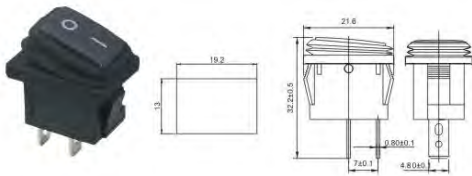


A-TOP1-2-101W ON-OFF

A-TOP1-4-201W / 201NW

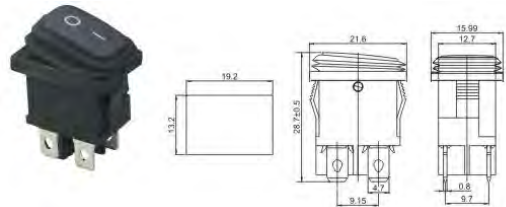


A-TOP1-4-201W ON-OFF
 A-TOP1-4-201NW ON-OFF

A-TOP1-2-102W / 103W

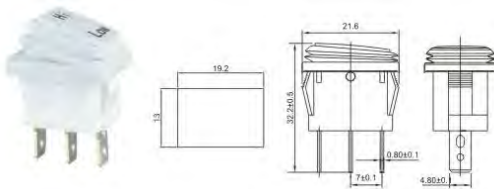


A-TOP1-2-102W ON-ON
 A-TOP1-2-103W ON-OFF-ON

A-TOP1-1-202 / 203

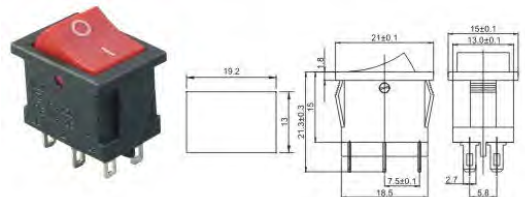


A-TOP1-1-202 ON-ON
 A-TOP1-1-203 ON-OFF-ON

A-TOP1-2-101NW

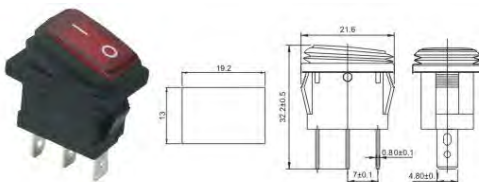

A-TOP1-2-101NW ON-OFF

A-TOP1-01

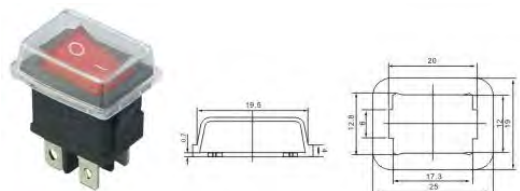

A-TOP1-01