

Rating: 10A 125VAC ; 6A 250VAC
Contact Resistance: 35m Ω max
Insulation Resistance: 500VDC 100M Ω min


Dielectric Strength: 1500VAC, 1 Minute
Operating Temperature: -25°C ~ +85°C
Electrical Life: $\geq$ 10,000 Cycles

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER




www.toptek-co.com

A-TOP1-8-101W

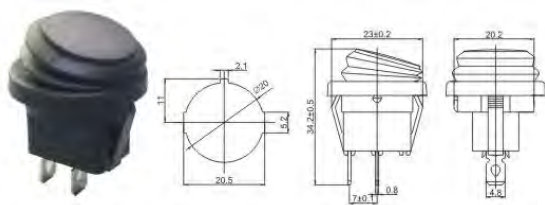


A-TOP1-8-101W ON-OFF

A-TOP1-6-201N-X

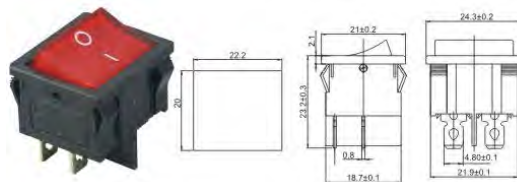


A-TOP1-6-201N-X ON-OFF With Light

A-TOP1-8-102W/103W

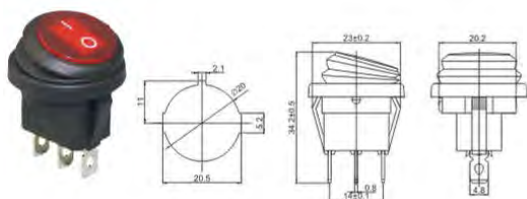


A-TOP1-8-102W ON-ON
A-TOP1-8-103W ON-OFF-ON

A-TOP1-6-202/202N/203

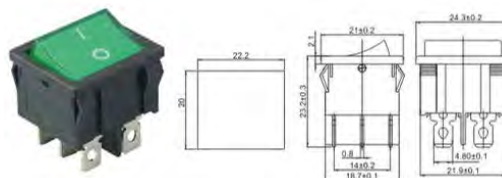


A-TOP1-6-202 ON-ON
A-TOP1-6-202N ON-ON
A-TOP1-6-203 ON-OFF-ON

A-TOP1-8-101NW

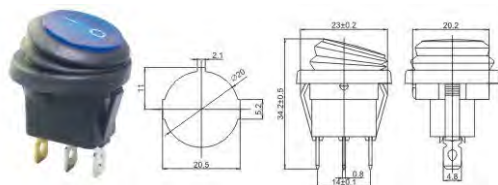


A-TOP1-8-101NW ON-OFF

A-TOP1-6-2101/2101N/2102

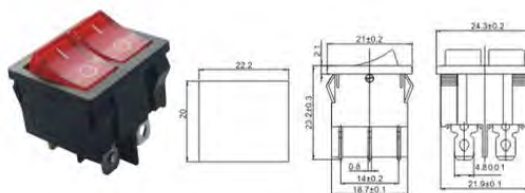


A-TOP1-6-2101 ON-OFF
A-TOP1-6-2101N ON-OFF
A-TOP1-6-2102 ON-ON

A-TOP1-8-201/201N-X

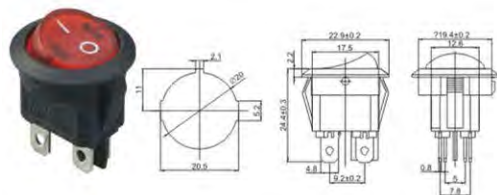

A-TOP1-8-201 ON-OFF
A-TOP1-8-201N-X ON-OFF With Light

A-TOP1-15

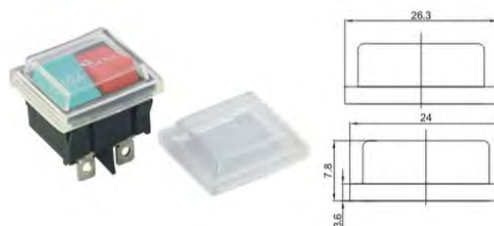

A-TOP1-15