

CONNECTOR MANUFACTURERS


TOPTek®
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com

Rating: 10A 125VAC ; 6A 250VAC
Contact Resistance: 35m Ω max
Insulation Resistance: 500VDC 100M Ω min


Dielectric Strength: 1500VAC, 1 Minute
Operating Temperature: -25°C~ +85°C
Electrical Life: $\geq$ 10,000 Cycles

A-TOP1-9-101

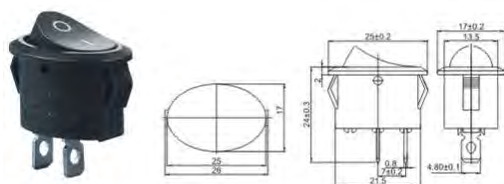


A-TOP1-9-101 ON-OFF

A-TOP1-12-101

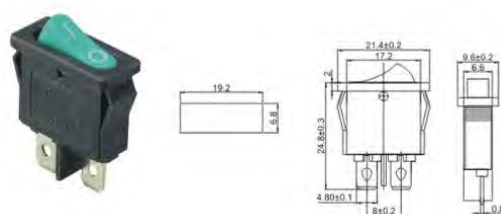

A-TOP1-12-101 ON-OFF

A-TOP1-9-102/103

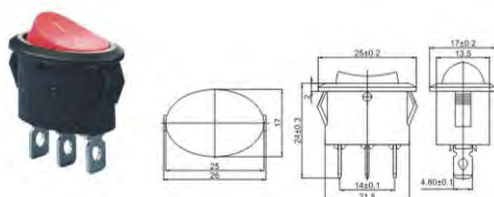


A-TOP1-9-102 ON-ON
A-TOP1-9-103 ON-OFF-ON

A-TOP1-14




A-TOP1-14

A-TOP1-9-101N

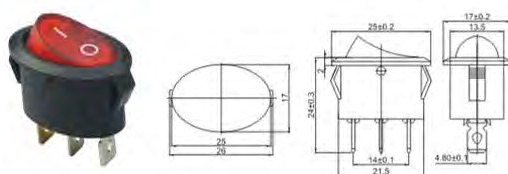

A-TOP1-9-101N ON-OFF

A-TOP1-13-102

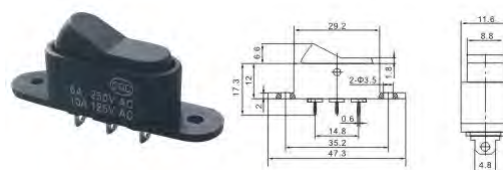


A-TOP1-13-102 ON-ON

A-TOP1-13



A-TOP1-13

A-TOP1-122-1

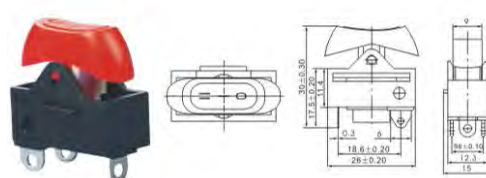

A-TOP1-122-1 OFF-ON-ON