

CONNECTOR MANUFACTURERS


Rating: 20A 125VAC ; 15A 250VAC
Contact Resistance: 35m Ω max
Insulation Resistance: 500VDC 100M Ω min

Dielectric Strength: 1500VAC, 1 Minute
Operating Temperature: -25°C ~ +85°C
Electrical Life: $\geq$ 10,000 Cycles

TOPTek®
HARDWARE ELECTRONIC MANUFACTURER




A-TOP3-101EN

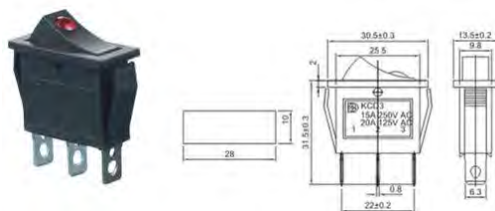

A-TOP3-101EN ON-OFF

A-TOP3-2-102V

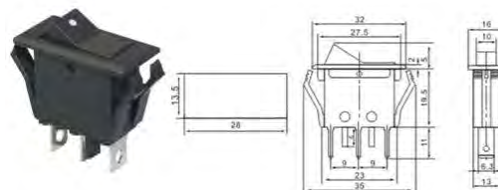


A-TOP3-2-102V ON-ON

A-TOP3-03




A-TOP3-03

A-TOP3-2-101NV

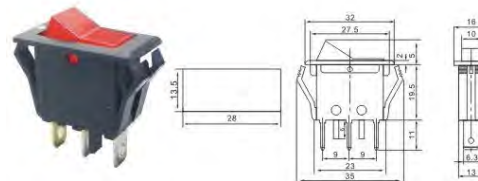


A-TOP3-2-101NV ON-OFF

A-TOP3-101W

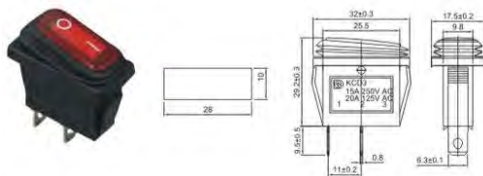


A-TOP3-101W ON-OFF

A-TOP3-2-101C/102C/101NC

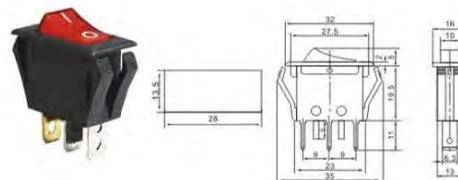


A-TOP3-2-101C ON-OFF
A-TOP3-2-102C ON-ON
A-TOP3-2-101NC ON-OFF

A-TOP3-102W/103W

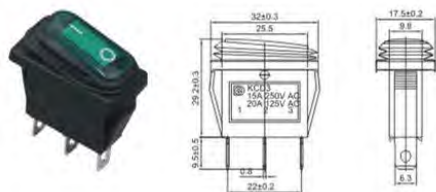

A-TOP3-102W ON-ON
A-TOP3-103W ON-OFF-ON

A-TOP3-03 Panel

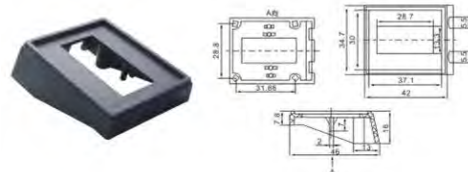

A-TOP3-03 Panel