

Rocker Switch



Rating: 20A 125VAC ; 15A 250VAC
 Contact Resistance: 35m Ω max
 Insulation Resistance: 500VDC 100M Ω min


Dielectric Strength: 1500VAC, 1 Minute
 Operating Temperature: -25°C~ +85°C
 Electrical Life: ≥ 10,000 Cycles

TOPTek[®]
 HARDWARE ELECTRONIC MANUFACTURER




www.toptek-co.com

A-TOP3-101NW

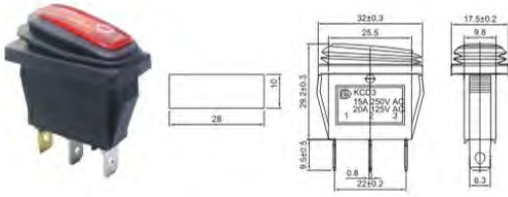


A-TOP3-101NW ON-OFF

A-TOP3-3-101N

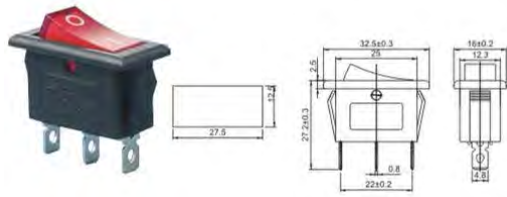


A-TOP3-3-101N ON-OFF

A-TOP3-2-101V

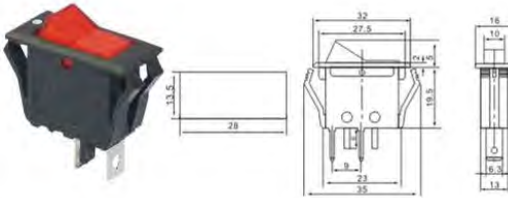


A-TOP3-2-101V ON-OFF

A-TOP3-4-101

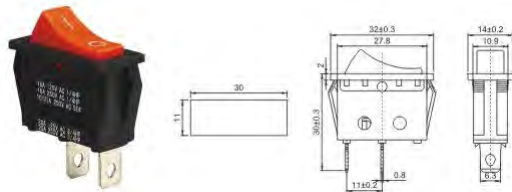


A-TOP3-4-101 ON-OFF

A-TOP3-4-103/123

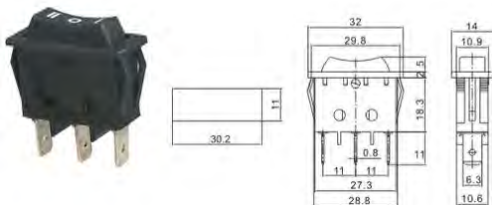


A-TOP3-4-103 ON-OFF-ON
 A-TOP3-4-123 (ON)-OFF-(ON)

A-TOP3-11-201EN

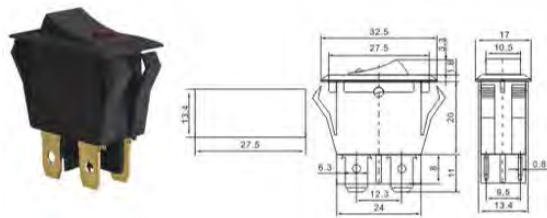


A-TOP3-11-201EN ON-OFF

A-TOP3-4-101N

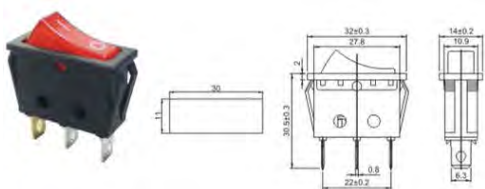

A-TOP3-4-101N ON-OFF

A-TOP3-12-101N

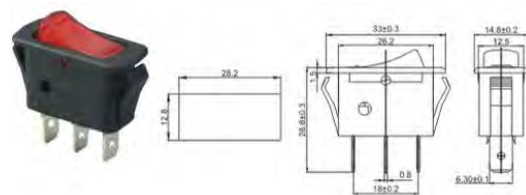

A-TOP3-12-101N ON-OFF

14
*
17

