


Rating: 20A 125VAC ; 16A 250VAC
Contact Resistance: 35m Ω max
Insulation Resistance: 500VDC 100M Ω min

Dielectric Strength: 1500VAC, 1 Minute
Operating Temperature: -25°C ~ +85°C
Electrical Life: $\geq$ 10,000 Cycles

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER




A-TOP2-201/211

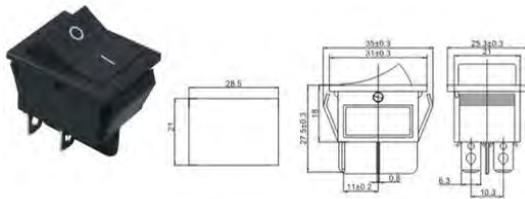


A-TOP2-201 ON-OFF
A-TOP2-211 OFF-(ON)

A-TOP2-202/212

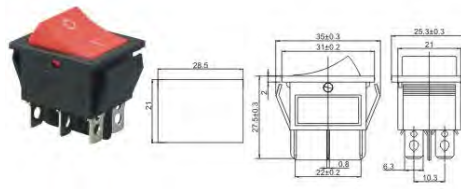


A-TOP2-202 ON-ON
A-TOP2-212 ON-(ON)

A-TOP2-201N

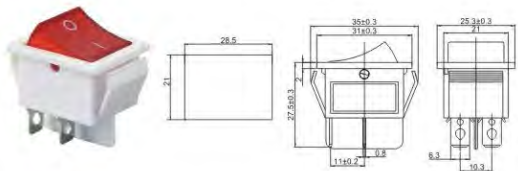


A-TOP2-201N ON-OFF

A-TOP2-202N

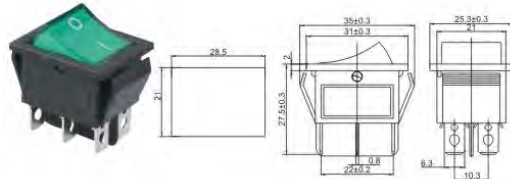


A-TOP2-202N ON-ON

A-TOP2-203/213/223

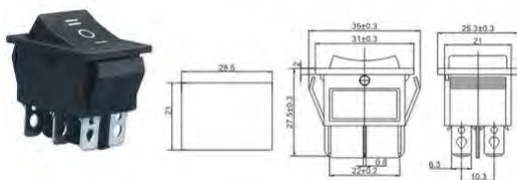


A-TOP2-203 ON-OFF-ON
A-TOP2-213 ON-OFF-(ON)
A-TOP2-223 (ON)-OFF-(ON)

A-TOP2-202W/202NW/203W/203NW

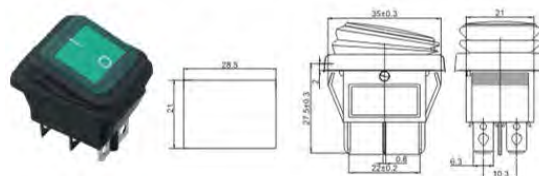


A-TOP2-202W ON-ON
A-TOP2-202NW ON-ON
A-TOP2-203W ON-OFF-ON
A-TOP2-203NW ON-OFF-ON

A-TOP2-203N

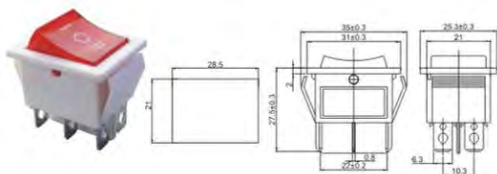

A-TOP2-203N ON-OFF

A-TOP2-201-X/211

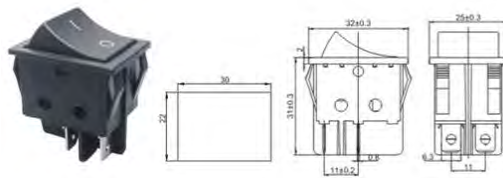

A-TOP2-2-201-X ON-OFF W/o Light
A-TOP2-2-211 OFF-(ON)