

Rocker Switch





Rating: 20A 125VAC ; 16A 250VAC
 Contact Resistance: 35m Ω max
 Insulation Resistance: 500VDC 100M Ω min

Dielectric Strength: 1500VAC, 1 Minute
 Operating Temperature: -25°C~ +85°C
 Electrical Life: ≥ 10,000 Cycles



A-TOP2-2-201W/201NW

A-TOP2-5-2101/2101N

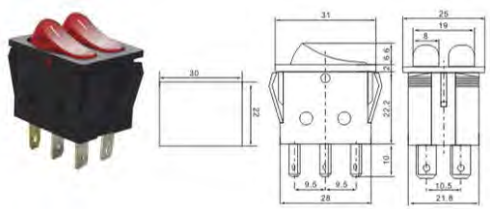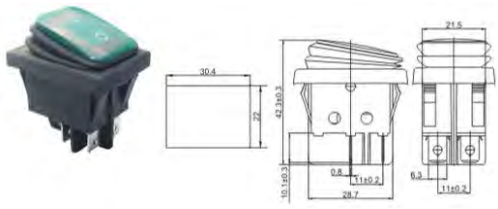



A-TOP2-2-201W ON-OFF
 A-TOP2-2-201NW ON-OFF

A-TOP2-5-2101 ON-OFF 4P
 A-TOP2-5-2101N ON-OFF 6P

14
*
21

A-TOP2-2-202W/202NW

A-TOP2-04B

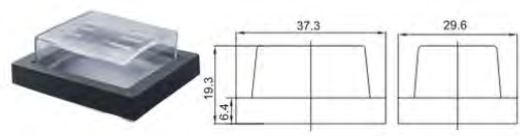
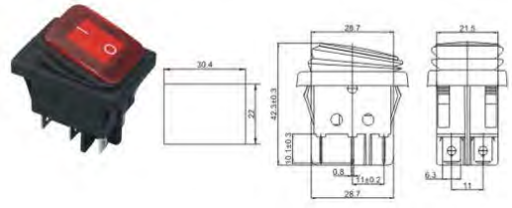


A-TOP2-2-202W ON-ON
 A-TOP2-2-202NW ON-ON

A-TOP2-04B

A-TOP2-2-201P

A-TOP2-3101/3101N/2-3101N

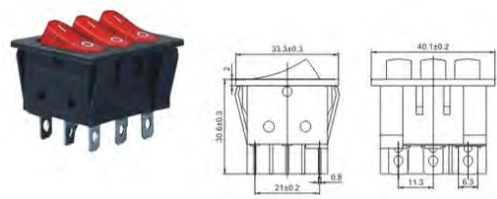
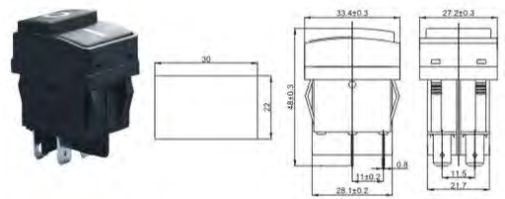


A-TOP2-2-201P ON-OFF

A-TOP2-3101 ON-OFF 6P
 A-TOP2-3101N ON-OFF 9P
 A-TOP2-2-3101N ON-OFF 8P White Color

A-TOP2-3-201/211/202/212/203/223

A-TOP2-3-3101N

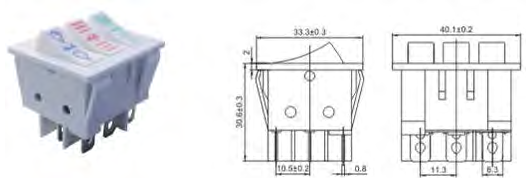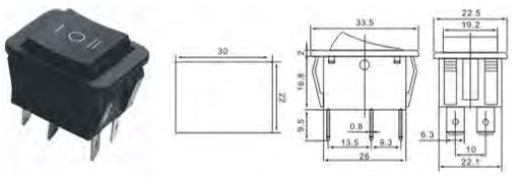

A-TOP2-3-201 ON-OFF
 A-TOP2-3-211 OFF-(ON)
 A-TOP2-3-202 ON-ON
 A-TOP2-3-212 ON-(ON)
 A-TOP2-3-203 ON-OFF-ON
 A-TOP2-3-223 (ON)-OFF-(ON)

A-TOP2-3-3101N ON-OFF 8P

