


CONNECTOR MANUFACTURERS

Rating: 20A 125VAC ; 16A 250VAC
 Contact Resistance: 35m Ω max
 Insulation Resistance: 500VDC 100M Ω min

Dielectric Strength: 1500VAC, 1 Minute
 Operating Temperature: -25°C~ +85°C
 Electrical Life: ≥ 10,000 Cycles




A-TOP2-4-2101/2101N

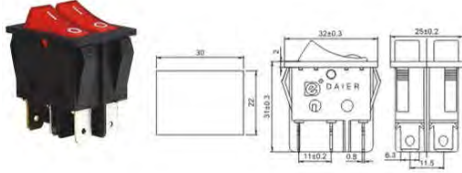


A-TOP2-4-2101 ON-OFF 4P
 A-TOP2-4-2101N ON-OFF 6P

A-TOP2-10-201/201N

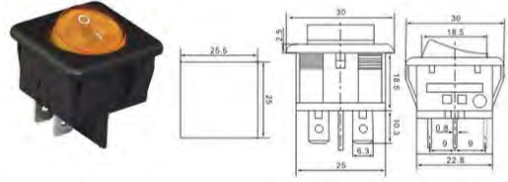


A-TOP2-10-201 ON-OFF
 A-TOP2-10-201 ON-OFF

A-TOP2-4-2101EN

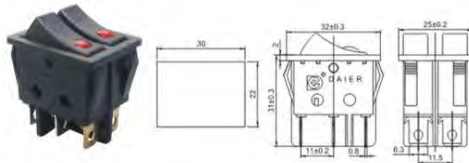

A-TOP2-4-2101EN ON-OFF

A-TOP2-06/06N

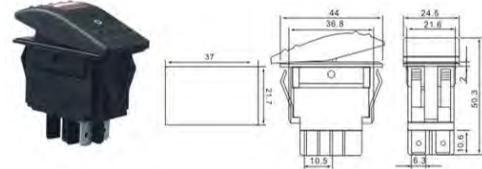

A-TOP2-06 ON-OFF
 A-TOP2-06N ON-OFF

14
*
22

Rocker Switch

RoHS