

CONNECTOR MANUFACTURERS

Rating: 6A 125VAC ; 3A 250VAC
Contact Resistance: 35m Ω max
Insulation Resistance: 500VDC 100M Ω min

Dielectric Strength: 1500VAC, 1 Minute
Operating Temperature: -25°C~ +85°C
Electrical Life: $\geq$ 10,000 Cycles

TOPTek®
HARDWARE ELECTRONIC MANUFACTURER




A-TOP5-16




A-TOP5-8S.304



A-TOP5-3-101

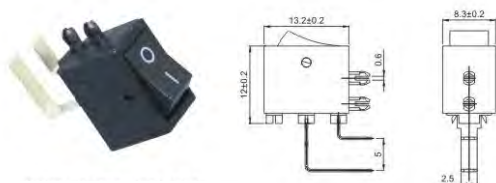

A-TOP5-305

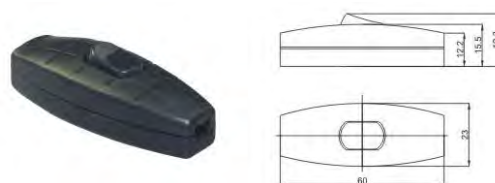

A-TOP5-3-101 ON-OFF

A-TOP5-303-1 SPST / 2 DPST




A-TOP5-322



A-TOP5-303-1 SPST
A-TOP5-303-2 DPST

A-TOP5-304

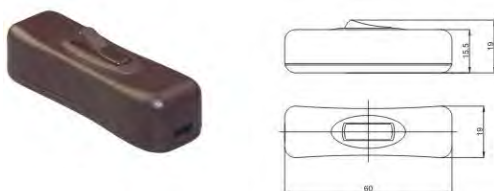

A-TOP5-307

