

Ø 19 -22 mm


TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER



CA-TOP-19-X



Diameter: Ø 19mm
 Switch Rating: 5A/250VAC
 Contact Configuration: 1NO 1NC/ 2NO 2NC
 Operation Type:
 • 2 Position
 • 3 Position
 The Front Shape: Selector
 The Crust Material: Stainless steel
 IP Degree: IP67, IK10

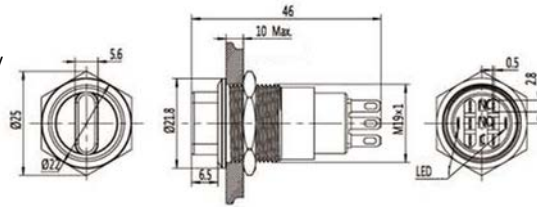


14
*
53

CA-TOP-19-XA




Diameter: Ø 19mm
 Color: R, G, Y, O, B, W
 Switch Rating: 5A/250VAC
 Contact Configuration: 1NO 1NC/ 2NO 2NC
 Operation Type:
 • 2 Position
 • 3 Position
 The Front Shape: Arrow
 The Crust Material:
 • Stainless steel
 IP Degree: IP67, IK10

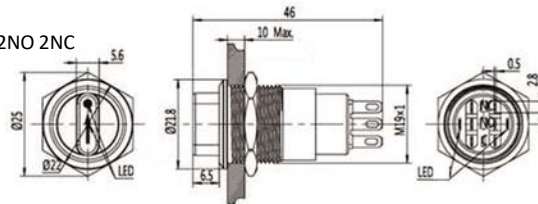

CA-TOP-19-BZ



Diameter: Ø 19mm
 Its phonation type:
 • Buzzer(M)
 • Flicker Buzzer(SM)
 Flash color: R, G, Y, O, B, W
 Rated Voltage: DC12V/DC24V
 • AC110V/AC220V
 Sound Intensity: ≥ 85dB(0,1*m)
 The Front Shape: Flat Round Honeycomb
 The Crust Material: Stainless steel
 IP Degree: IP50, IK04

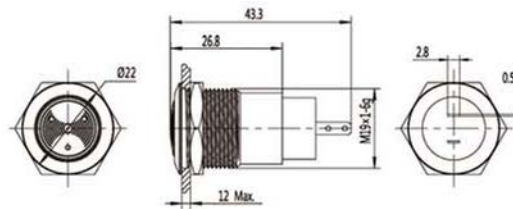

I-TOP-22F-J



Diameter: Ø 22mm
 Switch Rating: 5A/250VAC
 Contact Configuration: 1NO
 Operation Type: Momentary
 The Front Shape: Flat
 The Crust Material:
 • Stainless steel
 IP Degree: IP67, IK10

