

# CONNECTOR MANUFACTURERS

TOPTEK®  
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com

## Ø 28 - 30 mm


### S-TOP-28F-EP



Diameter: Ø 28mm  
Color: R, G, Y, O, B, W  
Switch Rating: 5A/250VAC  
Contact Configuration:  
1NO 1NC/2NO 2NC  
Operation Type:

- Momentary
- Maintained(Z)

The Front Shape: Flat  
Lamp type: Power symbol illuminated (LED)  
The Crust Material: Stainless steel  
IP Degree: IP67, IK10

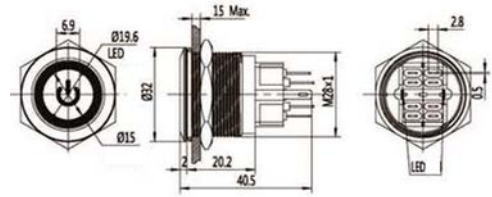


### S-TOP-30F



Diameter: Ø 30mm  
Switch Rating: 5A/250VAC  
Contact Configuration:  
1NO 1NC/2NO 2NC  
Operation Type:

- Momentary
- Maintained(Z)

The Front Shape: Flat  
The Crust Material: Stainless steel  
IP Degree: IP67, IK10

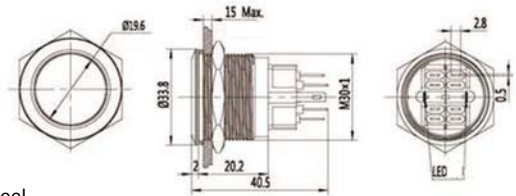


### S-TOP-30F-D



Diameter: Ø 30mm  
Color: R, G, Y, O, B, W  
Switch Rating: 5A/250VAC  
Contact Configuration:  
1NO 1NC/2NO 2NC  
Operation Type:

- Momentary
- Maintained(Z)

The Front Shape: Flat  
Lamp type: Dot illuminated (LED)  
The Crust Material: Stainless steel  
IP Degree: IP67, IK10

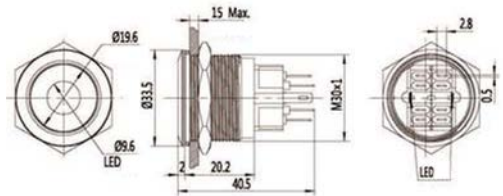

### S-TOP-30F-E



Diameter: Ø 30mm  
Switch Rating: 5A/250VAC  
Contact Configuration:  
1NO 1NC /2NO 2NC  
Operation Type:

- Momentary
- Maintained(Z)

The Front Shape: Flat  
Lamp type: Ring illuminated (LED)  
The Crust Material: Stainless steel  
IP Degree: IP67, IK10

