

Box Header 2.54mm H=13.6mm StraightType







Specifications

Current Rate: 3 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:20mΩ Max.
 Dielectric Voltage:1000V AC for one minute
 Operation Temperature:-40°C to +105°C


Material

Insulator:Polyester, UL 94V-0
 © Standard: PBT or Nylon 6T
 Terminal:Copper Alloy
 Plating:Gold Plated

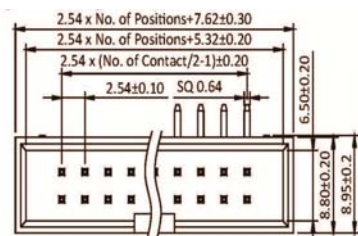

Part No.:BH1AS-XX-L/U

ORDER INFORMATION

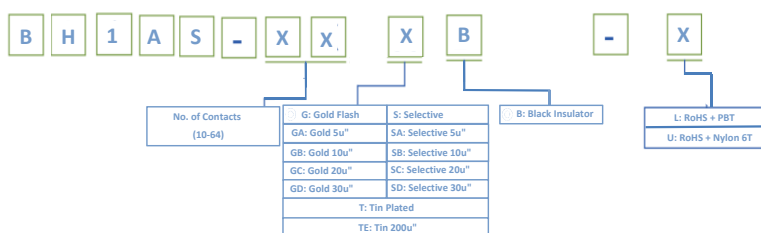

©:Standard Recommend