

Box Header 2.54mm SMT Type








Specifications

Current Rate: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C


Material

Insulator: Polyester, UL 94V-0
 © Standard: PBT or Nylon 6T
 Terminal: Copper Alloy
 Plating: Gold Plated

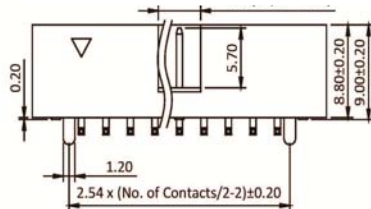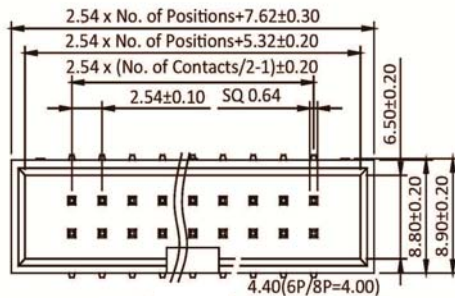

Part No.: BH1M-XX-L/U

ORDER INFORMATION

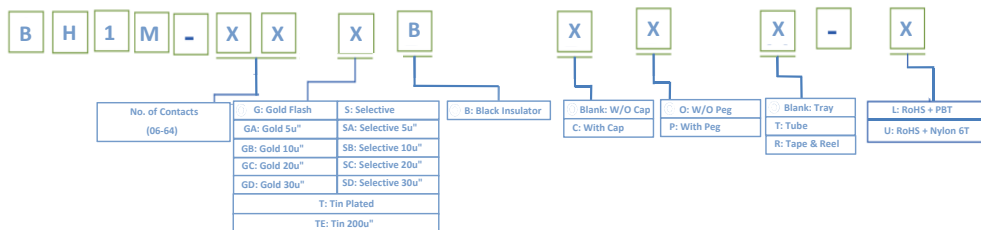

©:Standard Recommend